

# MAINE CORRECTIONAL CENTER

MAINE CORRECTIONAL CENTER,  
17 MALLISON FALLS ROAD  
WINDHAM, MAINE 04062




APPLICANT:  
STATE OF MAINE, DEPT.  
OF CORRECTIONS  
MAINE CORRECTIONAL CENTER,  
17 MALLISON FALLS ROAD  
WINDHAM, MAINE 04062

ENGINEER/SURVEYOR/  
LANDSCAPE ARCHITECT:



PROJECT ARCHITECT:  
SMRT  
144 FORE STREET P.O. BOX 618  
PORTLAND, MAINE 04104


CONSTRUCTION MANAGER:  
CIANBRO  
101 CIANBRO SQUARE

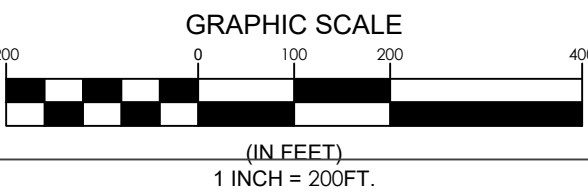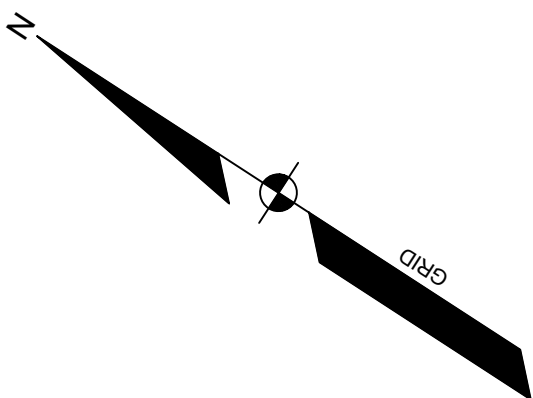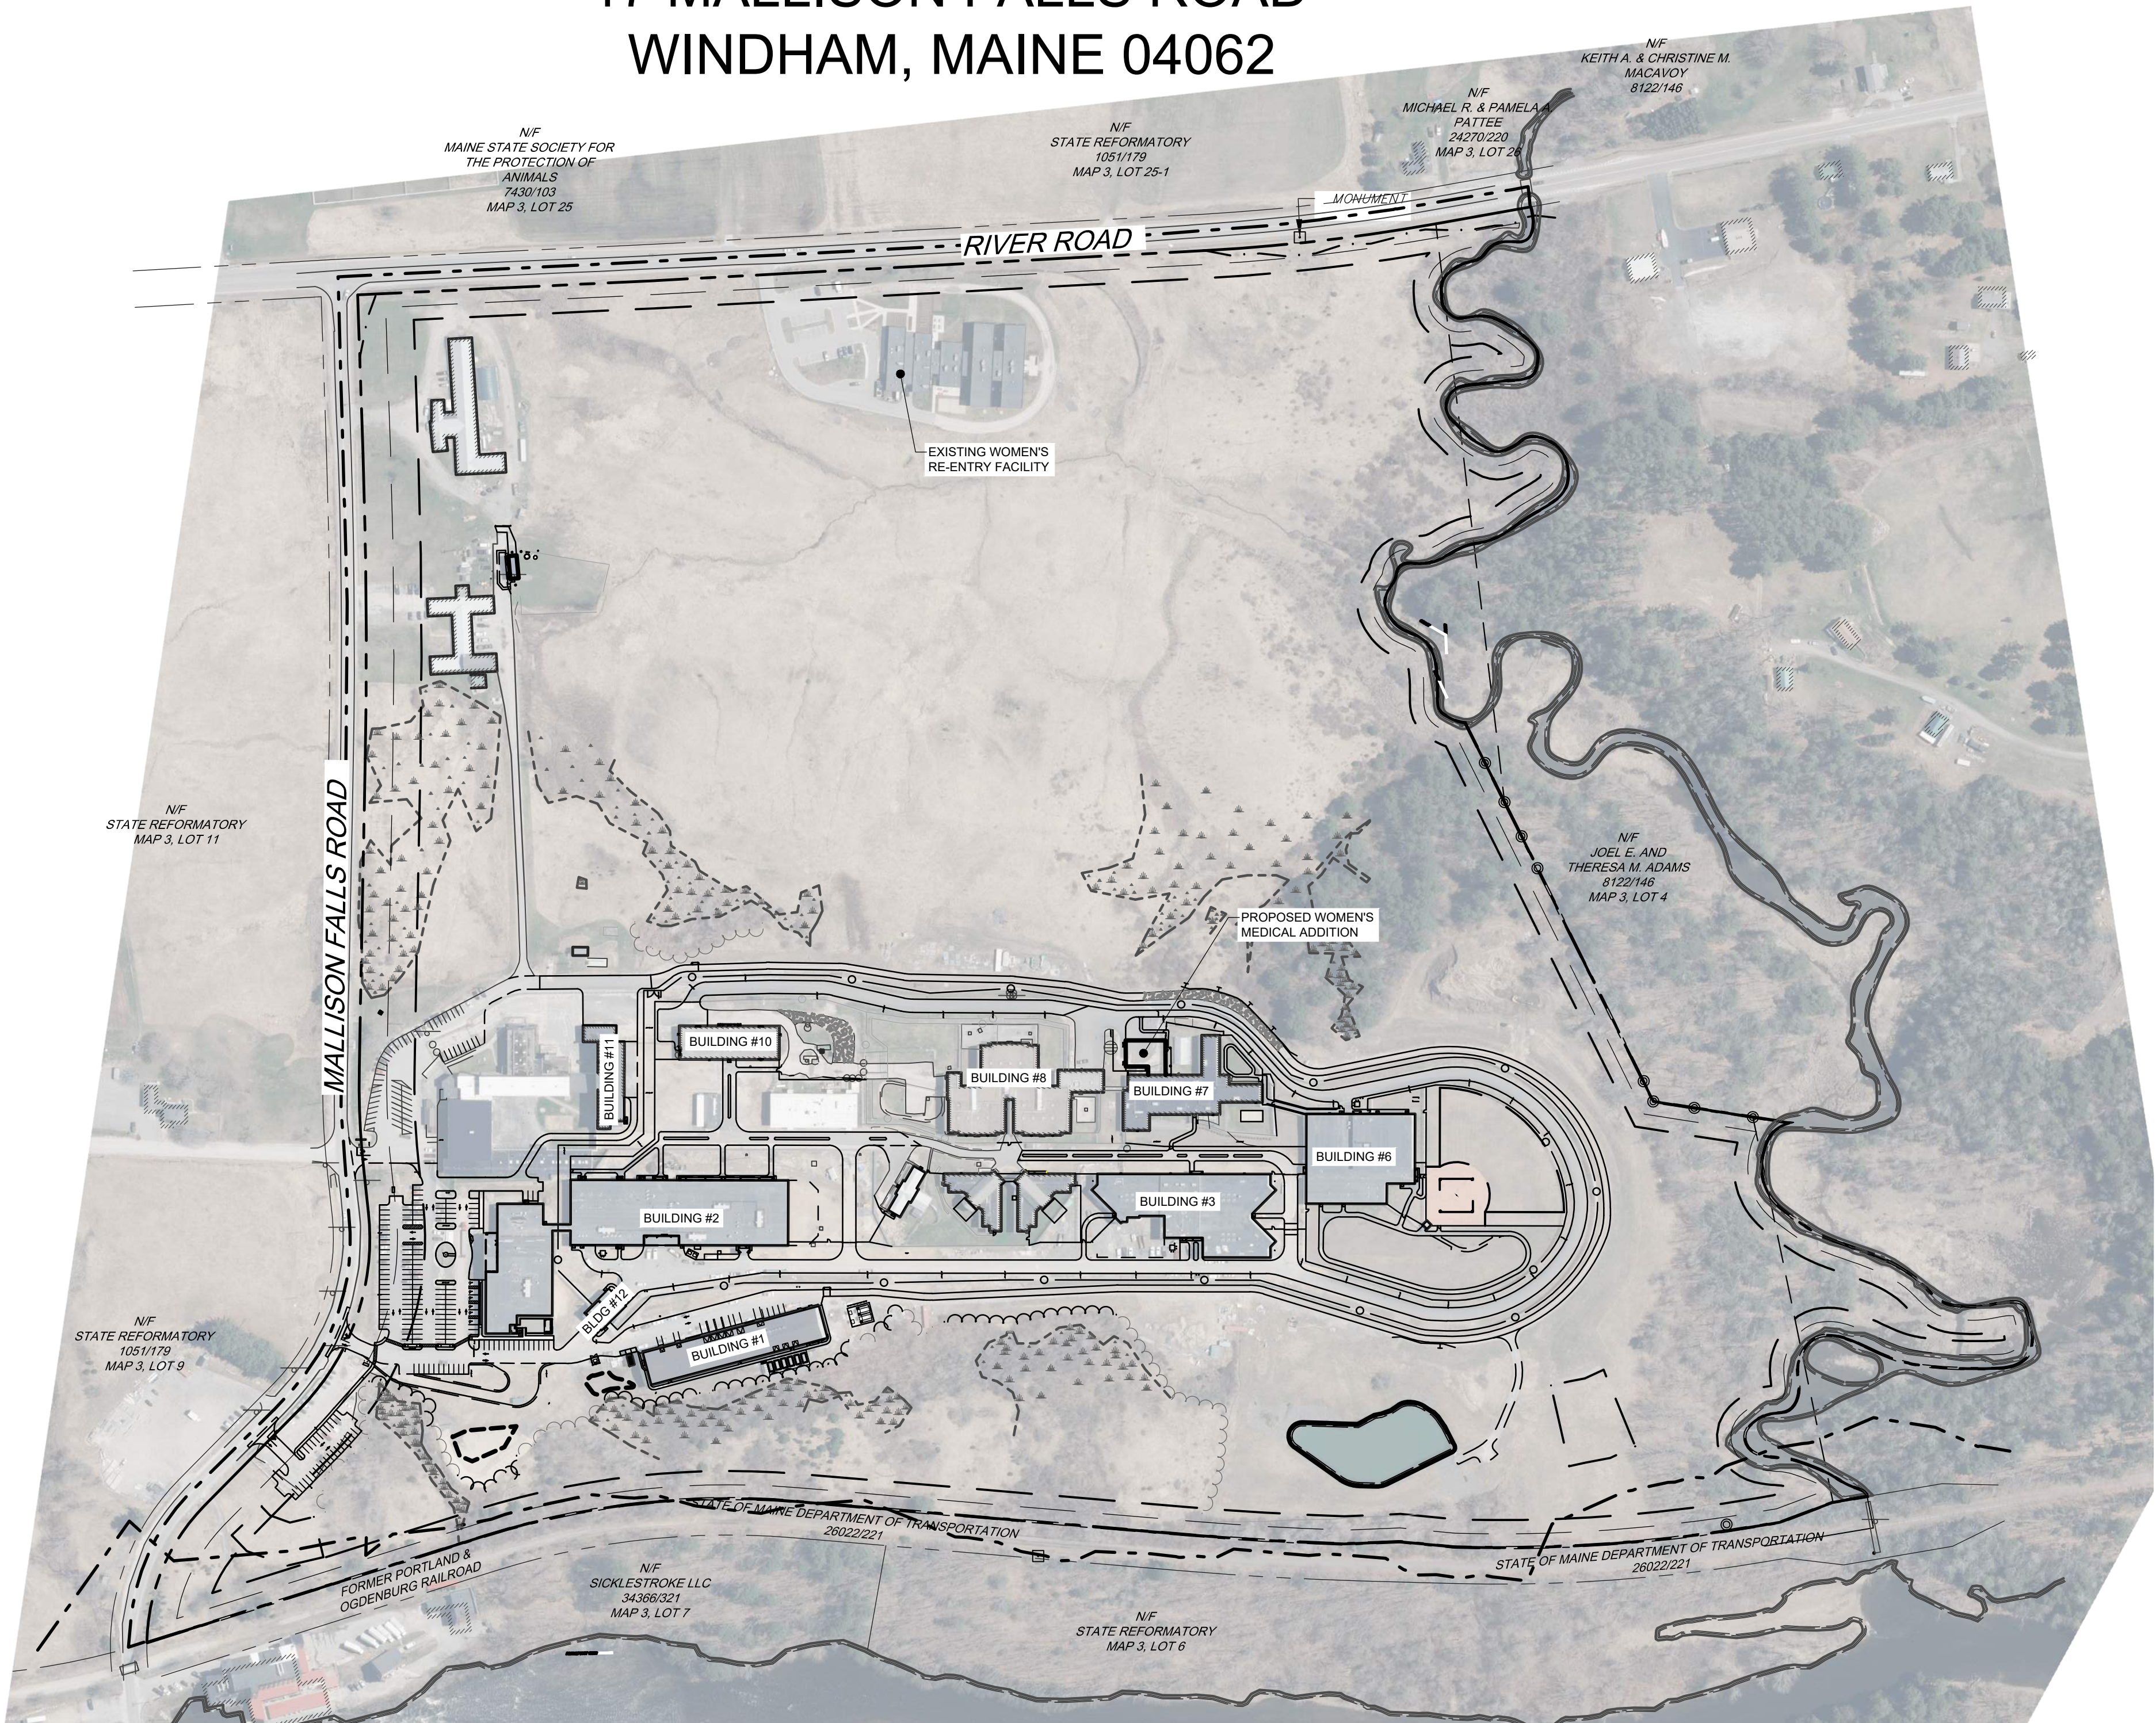

VICINITY PLAN  
SCALE: 1" = 200'


## SHEET LIST TABLE

SHEET NUMBER	SHEET TITLE		
2.GC000	COVER SHEET	2.07CE303	GRADING PLAN
2.GC001	CIVIL GENERAL NOTES & LEGEND	2.07CE401	UTILITY PLAN
2.07CE101	DEMOLITION PLAN	2.07CE402	UTILITY PLAN
2.07CE102	DEMOLITION PLAN	2.07CE501	LANDSCAPE PLAN
2.07CE201	OVERALL SITE PLAN	2.GC601	CIVIL EROSION & SEDIMENT CONTROL NOTES
2.07CE202	SITE PLAN		
2.07CE203	SITE PLAN	2.GC602	CIVIL EROSION & SEDIMENT CONTROL DETAILS & CIVIL DETAILS
2.07CE301	GRADING PLAN		
2.07CE302	GRADING PLAN	2.GC603	CIVIL DETAILS

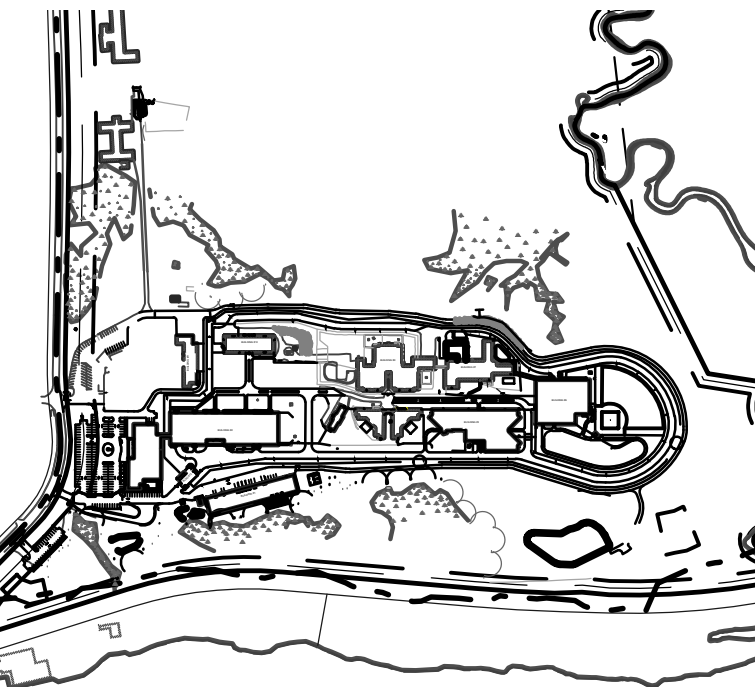

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:




SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

COVER SHEET

SHEET TITLE:




SCALE:


PROJECT MANAGER:	OAM	PROJECT NO:	17052
A/E OF RECORD:	OAM		
JOB CAPTAIN:	BJB		
DRAWN BY:	BJB		
SMRT FILE:	2.GC000-17052	SHEET NO.	2.GC000

NOT FOR CONSTRUCTION




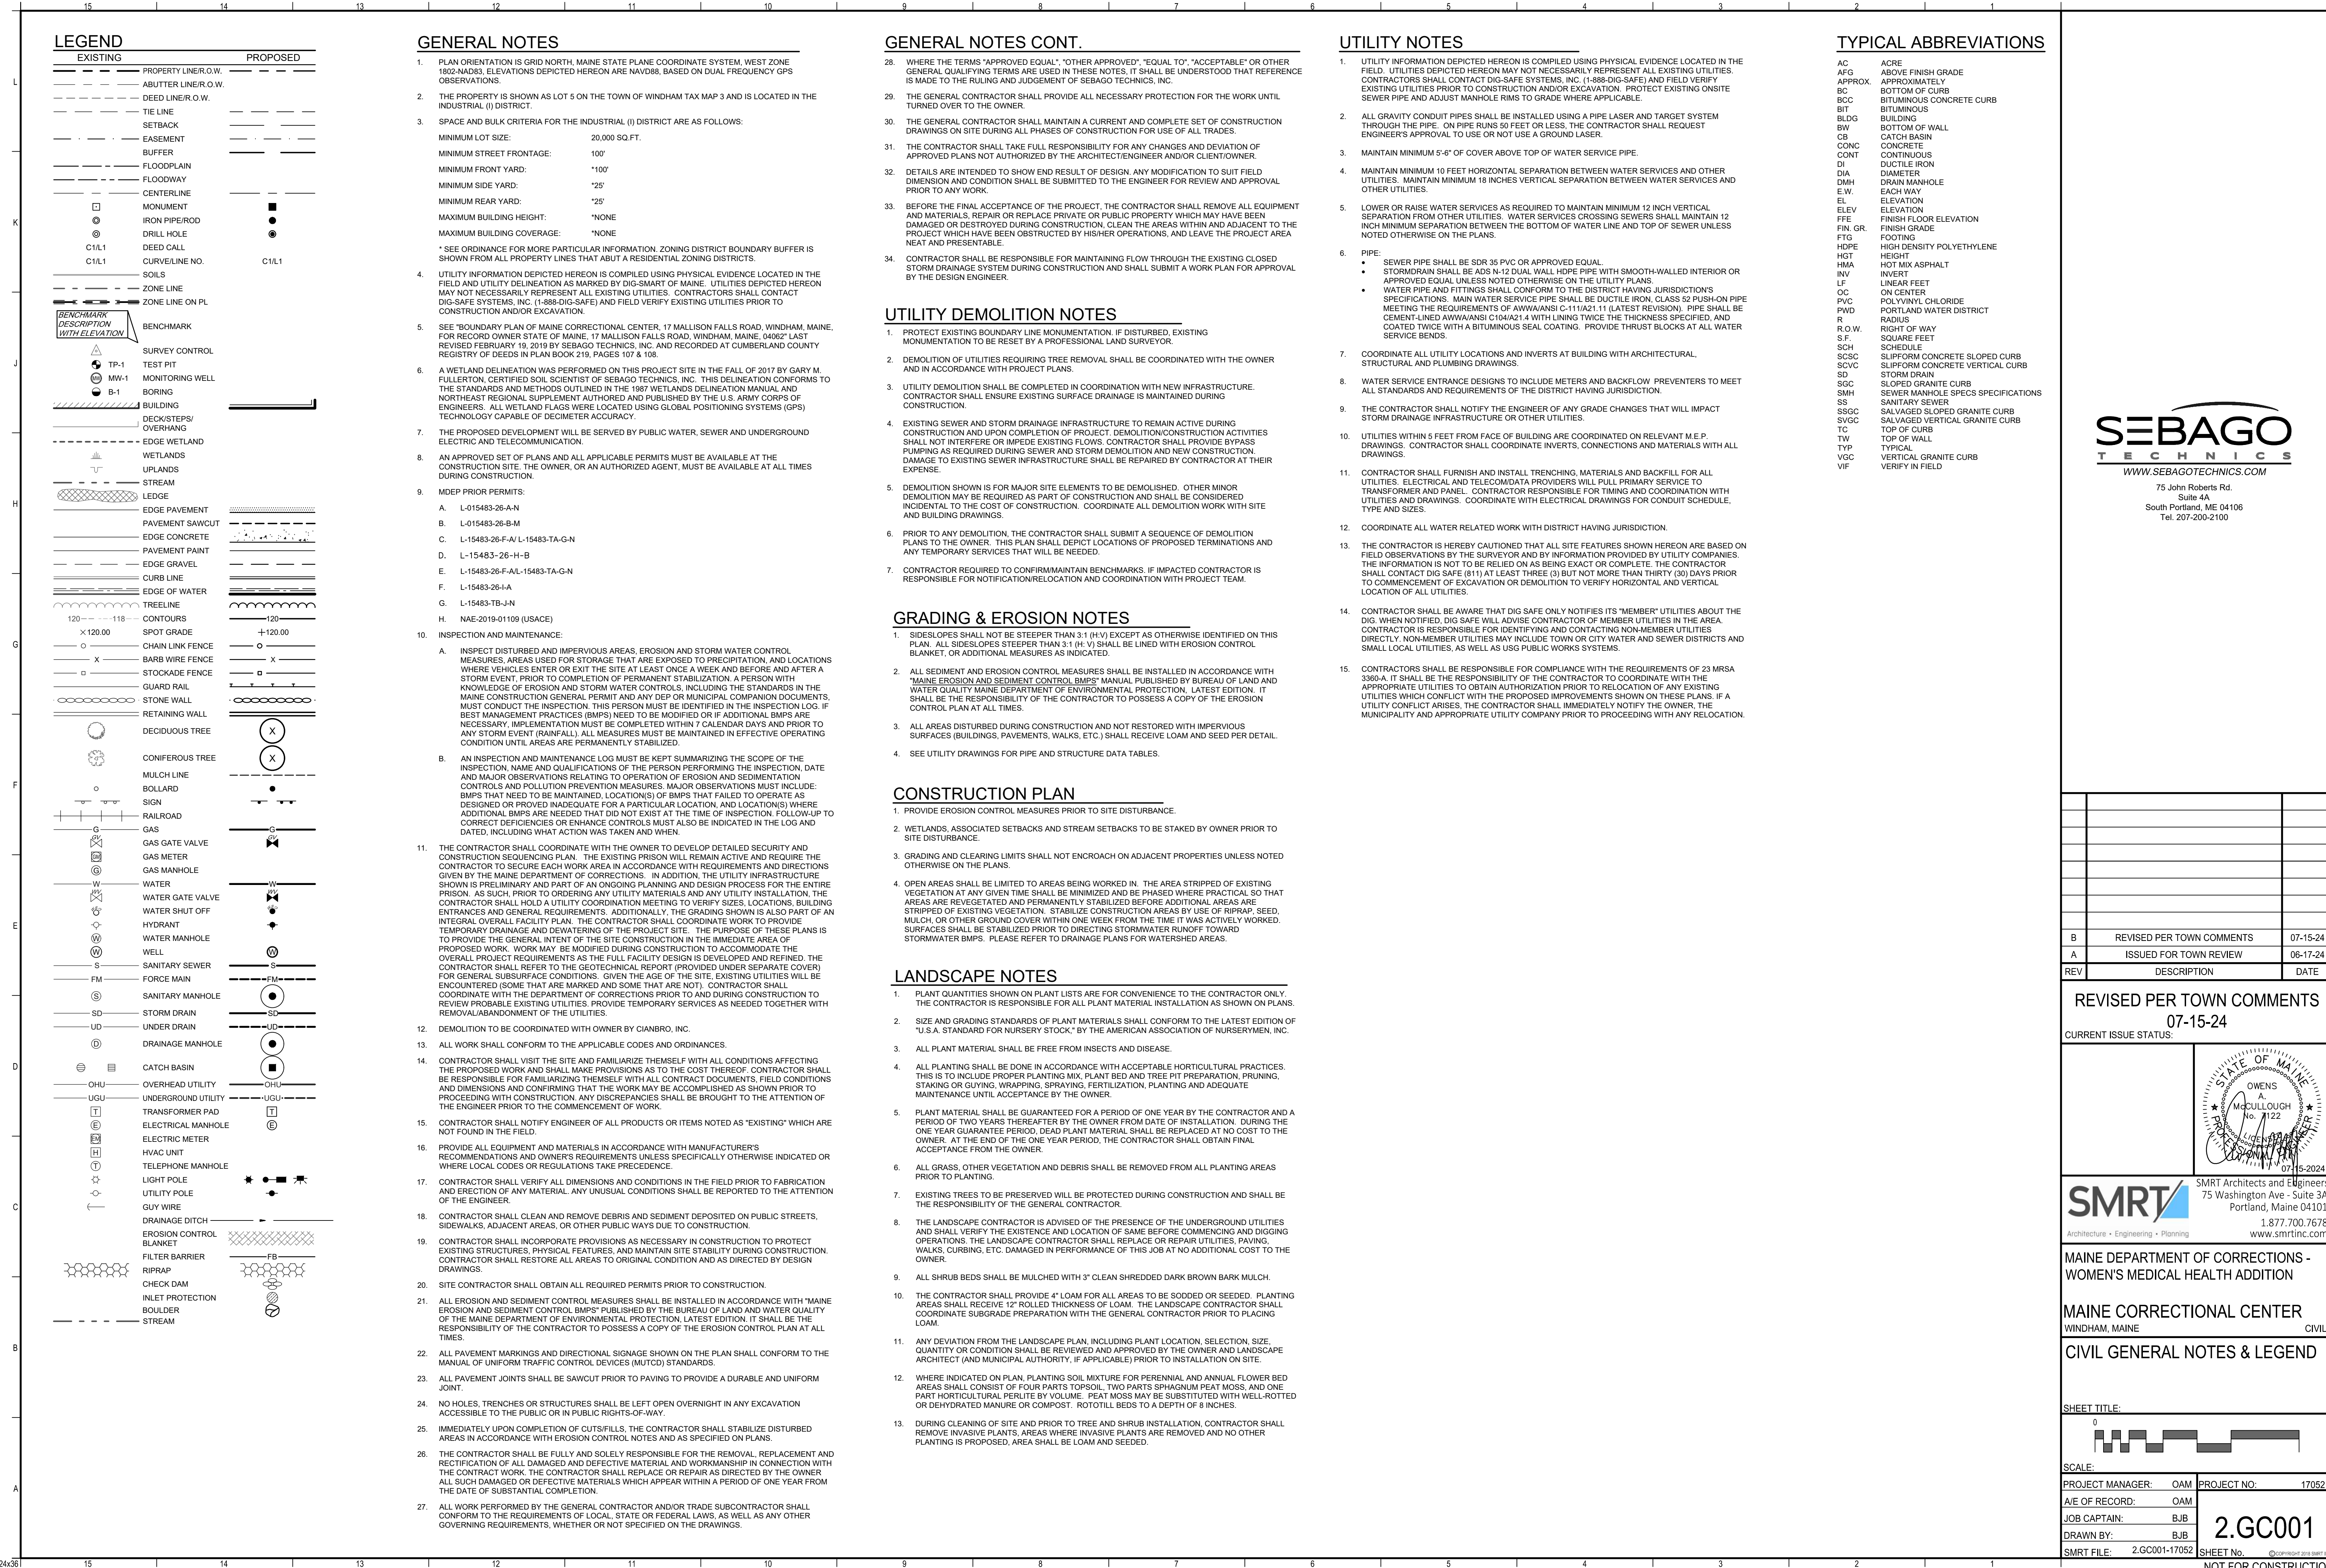



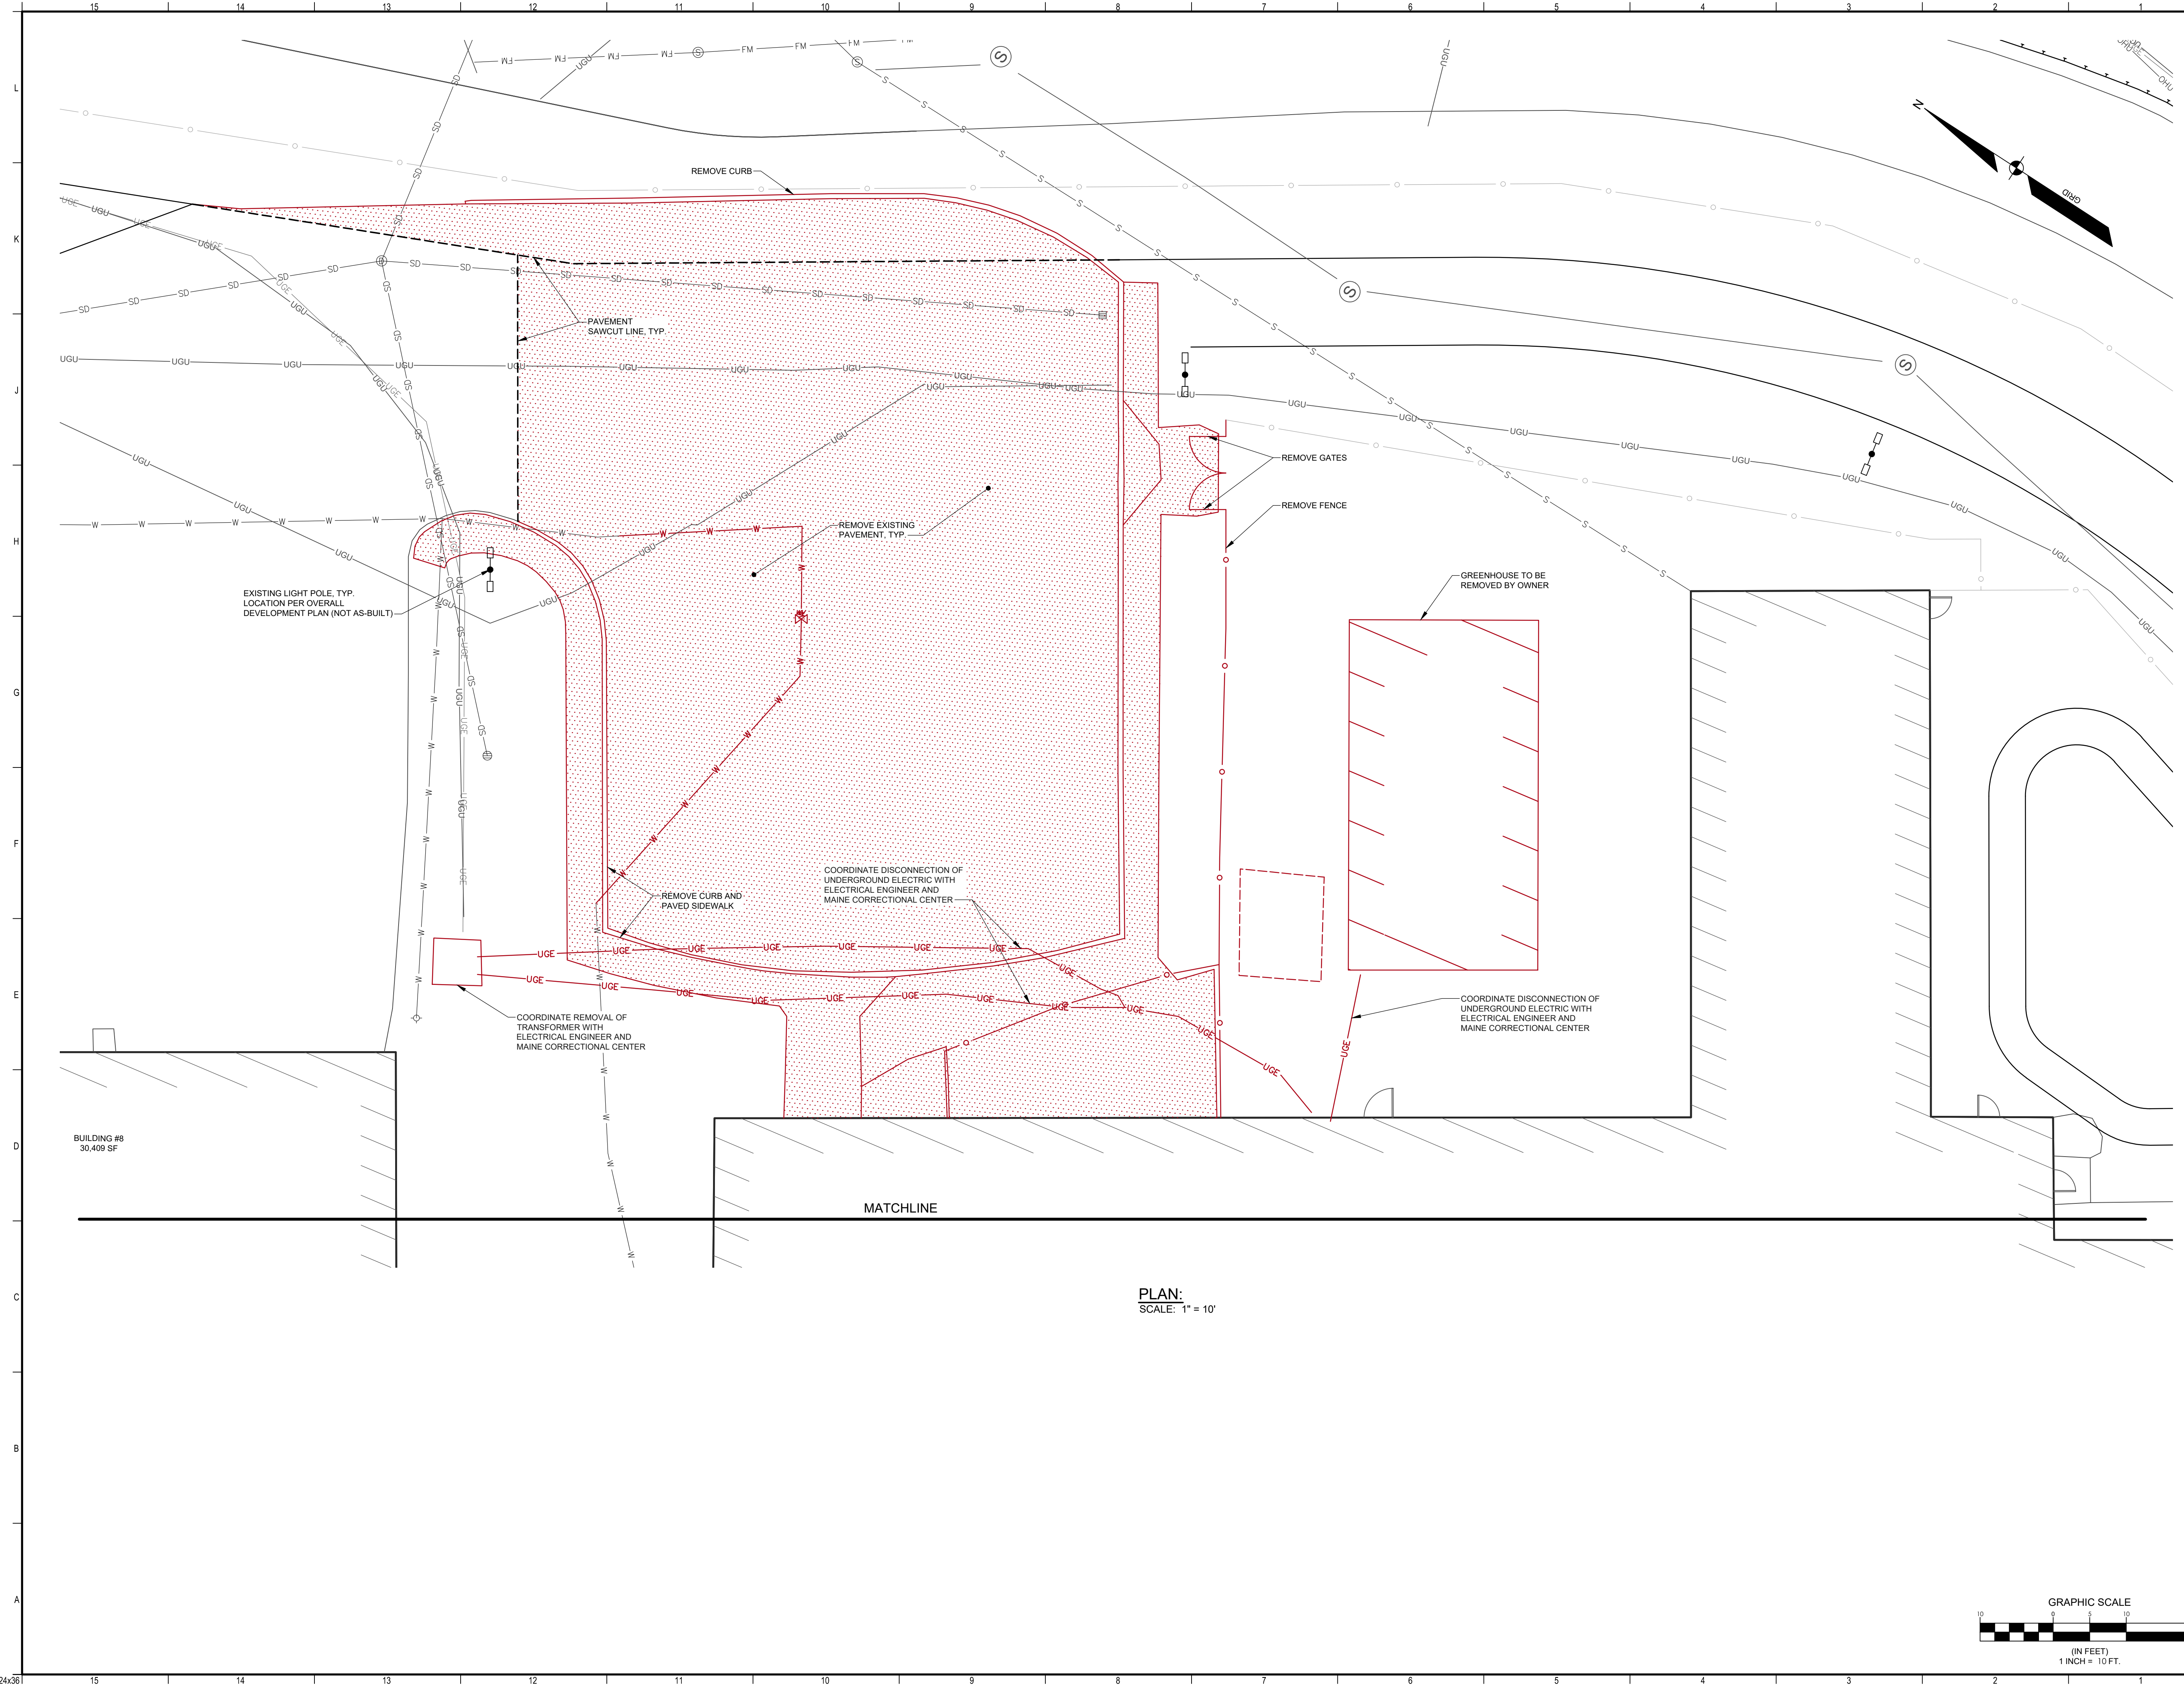


**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel. 207-200-2100

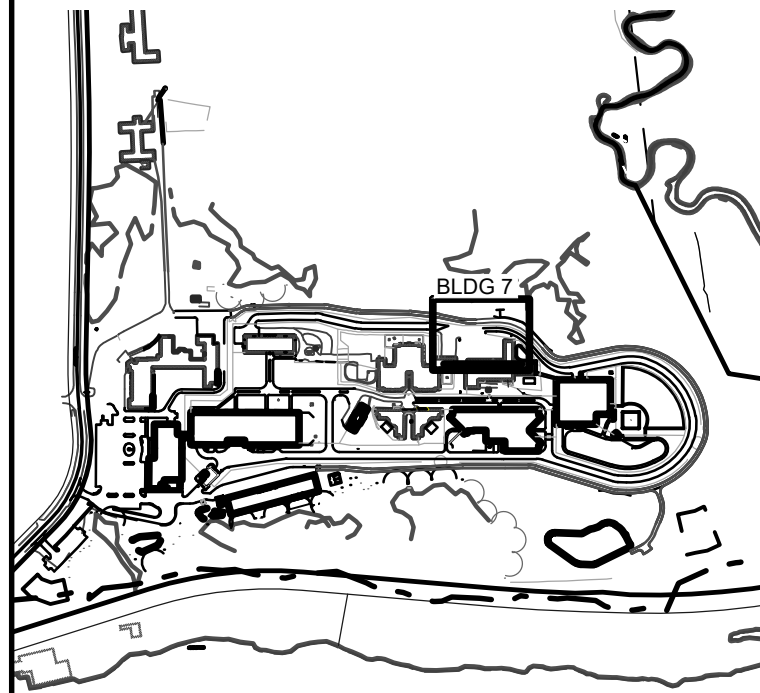

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

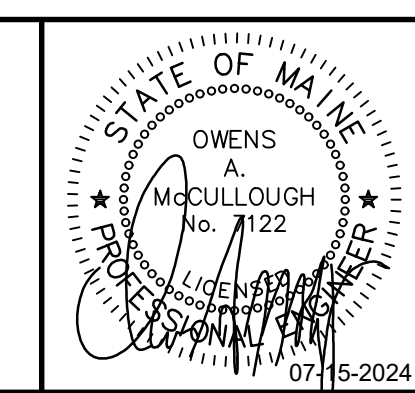


**SMRT** SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com  
Architecture • Engineering • Planning

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL


DEMOLITION PLAN

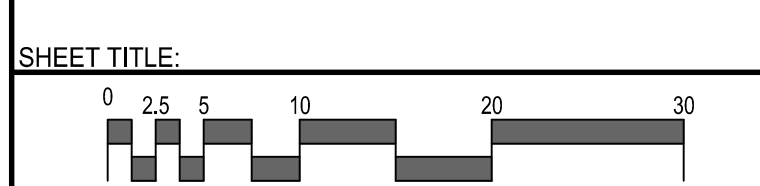


PROJECT MANAGER:	OAM	PROJECT NO:	17052
A/E OF RECORD:	OAM		
JOB CAPTAIN:	BJB		
DRAWN BY:	BJB		
SMRT FILE:	2.07CE101-17052	SHEET NO.	2.07CE101

NOT FOR CONSTRUCTION



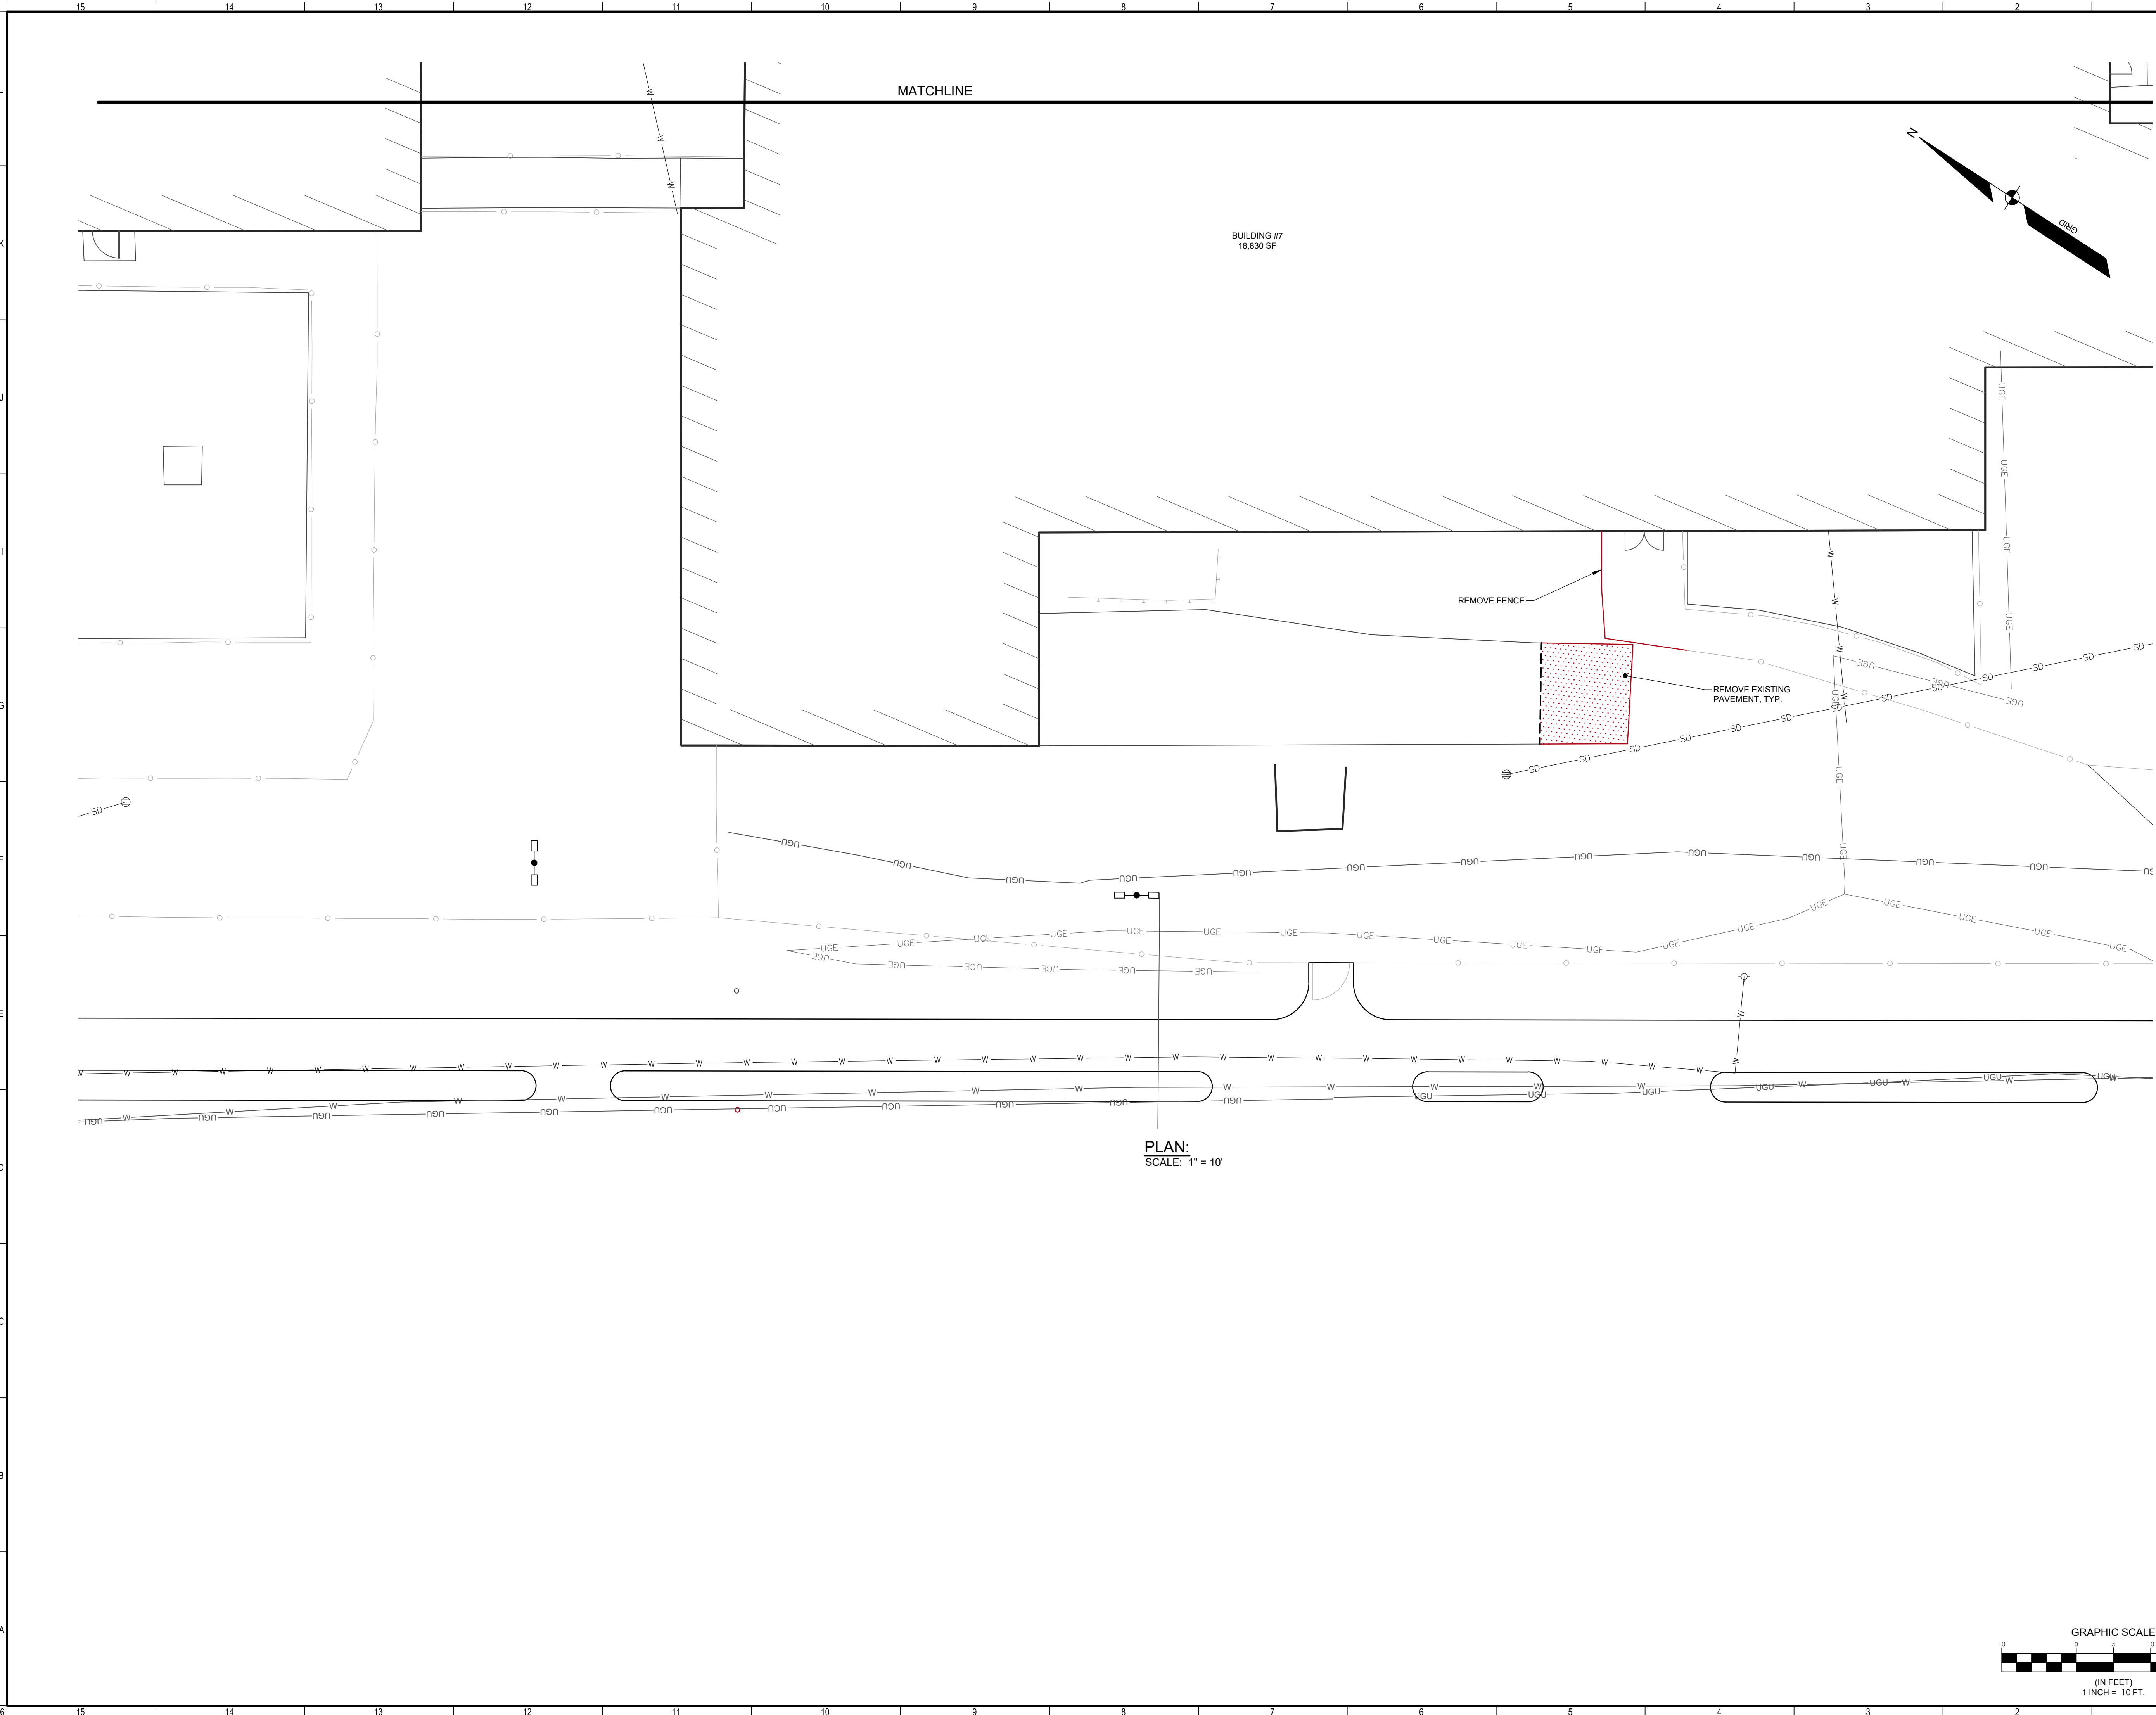


**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

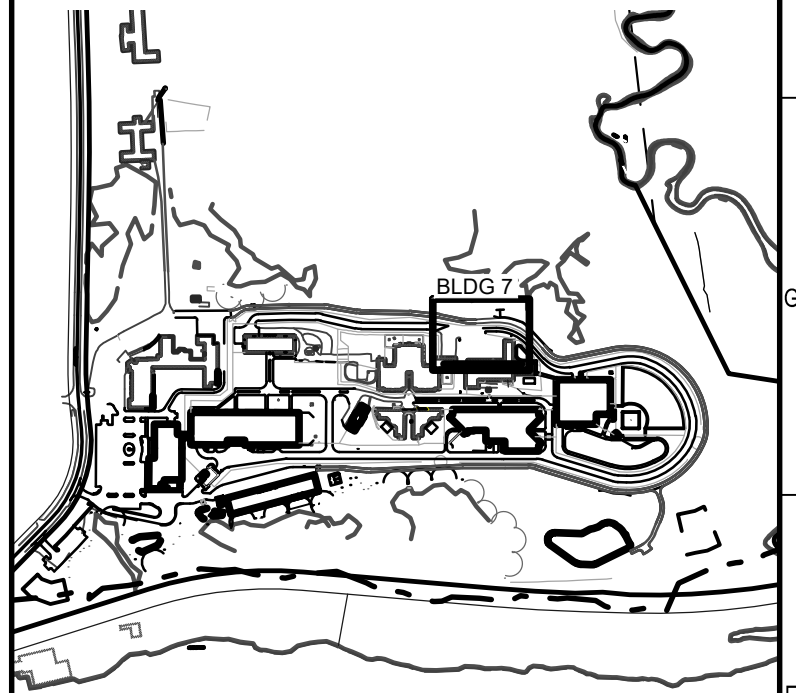

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

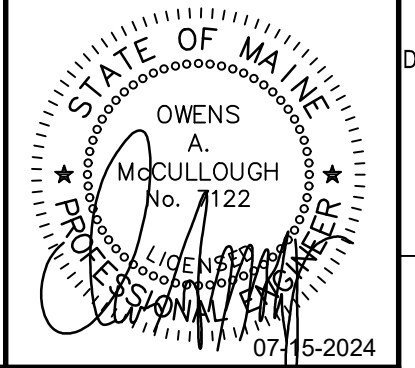


**SMRT**  
Architecture • Engineering • Planning  
SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtninc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE

DEMOLITION PLAN

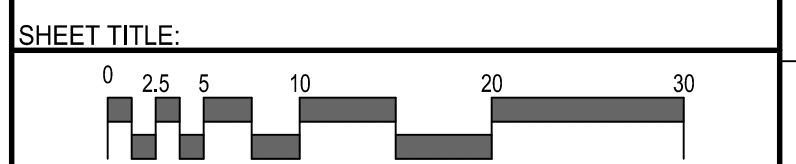


PROJECT MANAGER:	OAM	PROJECT NO:	17052
A/E OF RECORD:	OAM		
JOB CAPTAIN:	BJB		
DRAWN BY:	BJB		
SMRT FILE:	2.07CE102-17052		

**2.07CE102**

SHEET NO.

NOT FOR CONSTRUCTION



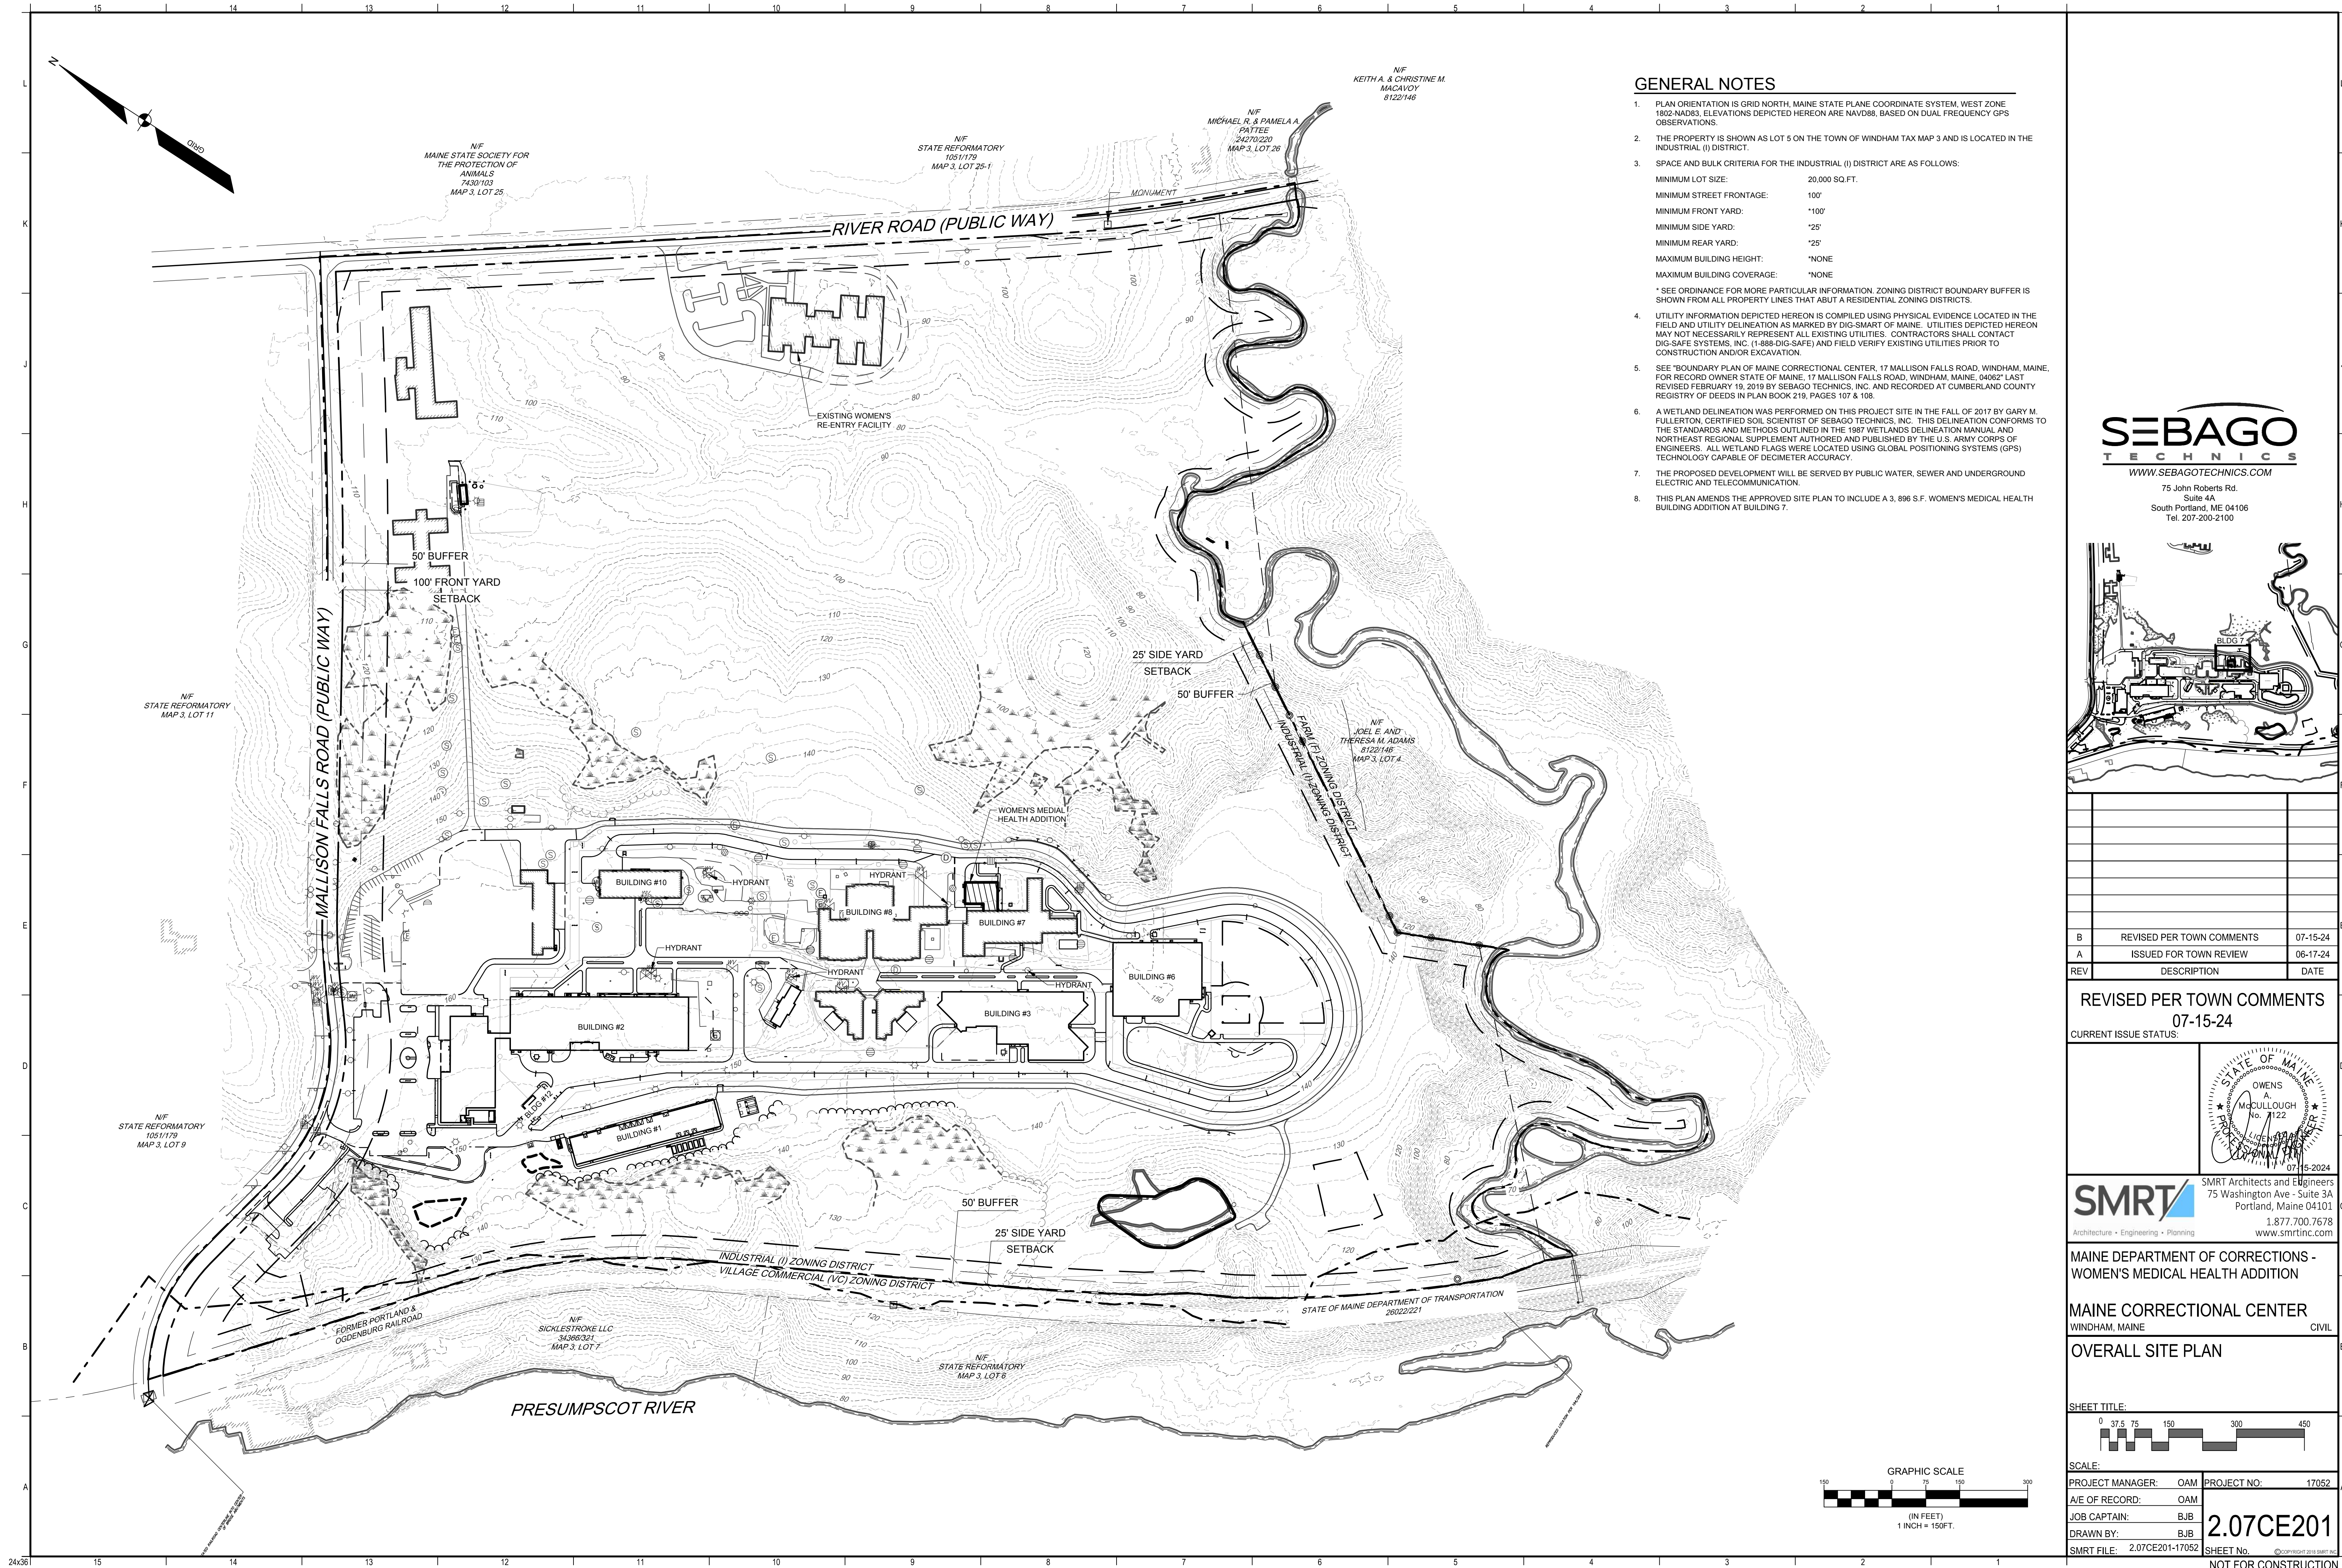

GENERAL NOTES

- PLAN ORIENTATION IS GRID NORTH, MAINE STATE PLANE COORDINATE SYSTEM, WEST ZONE 1802-NAD83, ELEVATIONS DEPICTED HEREON ARE NAVD88, BASED ON DUAL FREQUENCY GPS OBSERVATIONS.
- THE PROPERTY IS SHOWN AS LOT 5 ON THE TOWN OF WINDHAM TAX MAP 3 AND IS LOCATED IN THE INDUSTRIAL (I) DISTRICT.
- SPACE AND BULK CRITERIA FOR THE INDUSTRIAL (I) DISTRICT ARE AS FOLLOWS:  
MINIMUM LOT SIZE: 20,000 SQ.FT.  
MINIMUM STREET FRONTAGE: 100'  
MINIMUM FRONT YARD: 100'  
MINIMUM SIDE YARD: 25'  
MINIMUM REAR YARD: 25'  
MAXIMUM BUILDING HEIGHT: NONE  
MAXIMUM BUILDING COVERAGE: NONE  
\* SEE ORDINANCE FOR MORE PARTICULAR INFORMATION. ZONING DISTRICT BOUNDARY BUFFER IS SHOWN FROM ALL PROPERTY LINES THAT ADJUT A RESIDENTIAL ZONING DISTRICTS.
- UTILITY INFORMATION DEPICTED HEREON IS COMPILED USING PHYSICAL EVIDENCE LOCATED IN THE FIELD AND UTILITY DELINEATION AS MARKED BY DIG-SMART OF MAINE. UTILITIES DEPICTED HEREON MAY NOT NECESSARILY REPRESENT ALL EXISTING UTILITIES. CONTRACTORS SHALL CONTACT DIG-SAFE SYSTEMS, INC. (1-888-DIG-SAFE) AND FIELD VERIFY EXISTING UTILITIES PRIOR TO CONSTRUCTION AND/OR EXCAVATION.
- SEE "BOUNDARY PLAN OF MAINE CORRECTIONAL CENTER, 17 MOLLISON FALLS ROAD, WINDHAM, MAINE, FOR RECORD OWNER STATE OF MAINE, 17 MOLLISON FALLS ROAD, WINDHAM, MAINE, 04862" LAST REVISED FEBRUARY 19, 2019 BY SEBAGO TECHNIQS, INC. AND RECORDED AT CUMBERLAND COUNTY REGISTRY OF DEEDS IN PLAN BOOK 219, PAGES 107 & 108.
- A WETLAND DELINEATION WAS PERFORMED ON THIS PROJECT SITE IN THE FALL OF 2017 BY GARY M. FULLERTON, CERTIFIED SOIL SCIENTIST OF SEBAGO TECHNIQS, INC. THIS DELINEATION CONFORMS TO THE STANDARDS AND METHODS OUTLINED IN THE 1987 WETLANDS DELINEATION MANUAL AND NORTHEAST REGIONAL SUPPLEMENT AUTHORED AND PUBLISHED BY THE U.S. ARMY CORPS OF ENGINEERS. ALL WETLAND FLAGS WERE LOCATED USING GLOBAL POSITIONING SYSTEMS (GPS) TECHNOLOGY CAPABLE OF DECIMETER ACCURACY.
- THE PROPOSED DEVELOPMENT WILL BE SERVED BY PUBLIC WATER, SEWER AND UNDERGROUND ELECTRIC AND TELECOMMUNICATION.
- THIS PLAN AMENDS THE APPROVED SITE PLAN TO INCLUDE A 3, 896 S.F. WOMEN'S MEDICAL HEALTH BUILDING ADDITION AT BUILDING 7.



WWW.SEBAGOTECHNIQS.COM


75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100



REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24

CURRENT ISSUE STATUS:

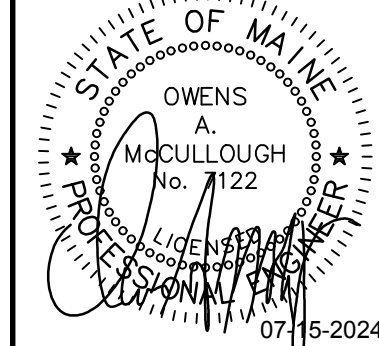


SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE

OVERALL SITE PLAN

SHEET TITLE:




SCALE:

PROJECT MANAGER: OAM  
A/E OF RECORD: OAM  
JOB CAPTAIN: BJB  
DRAWN BY: BJB  
SMRT FILE: 2.07CE201-17052

PROJECT NO: 17052  
2.07CE201  
SHEET NO.

NOT FOR CONSTRUCTION



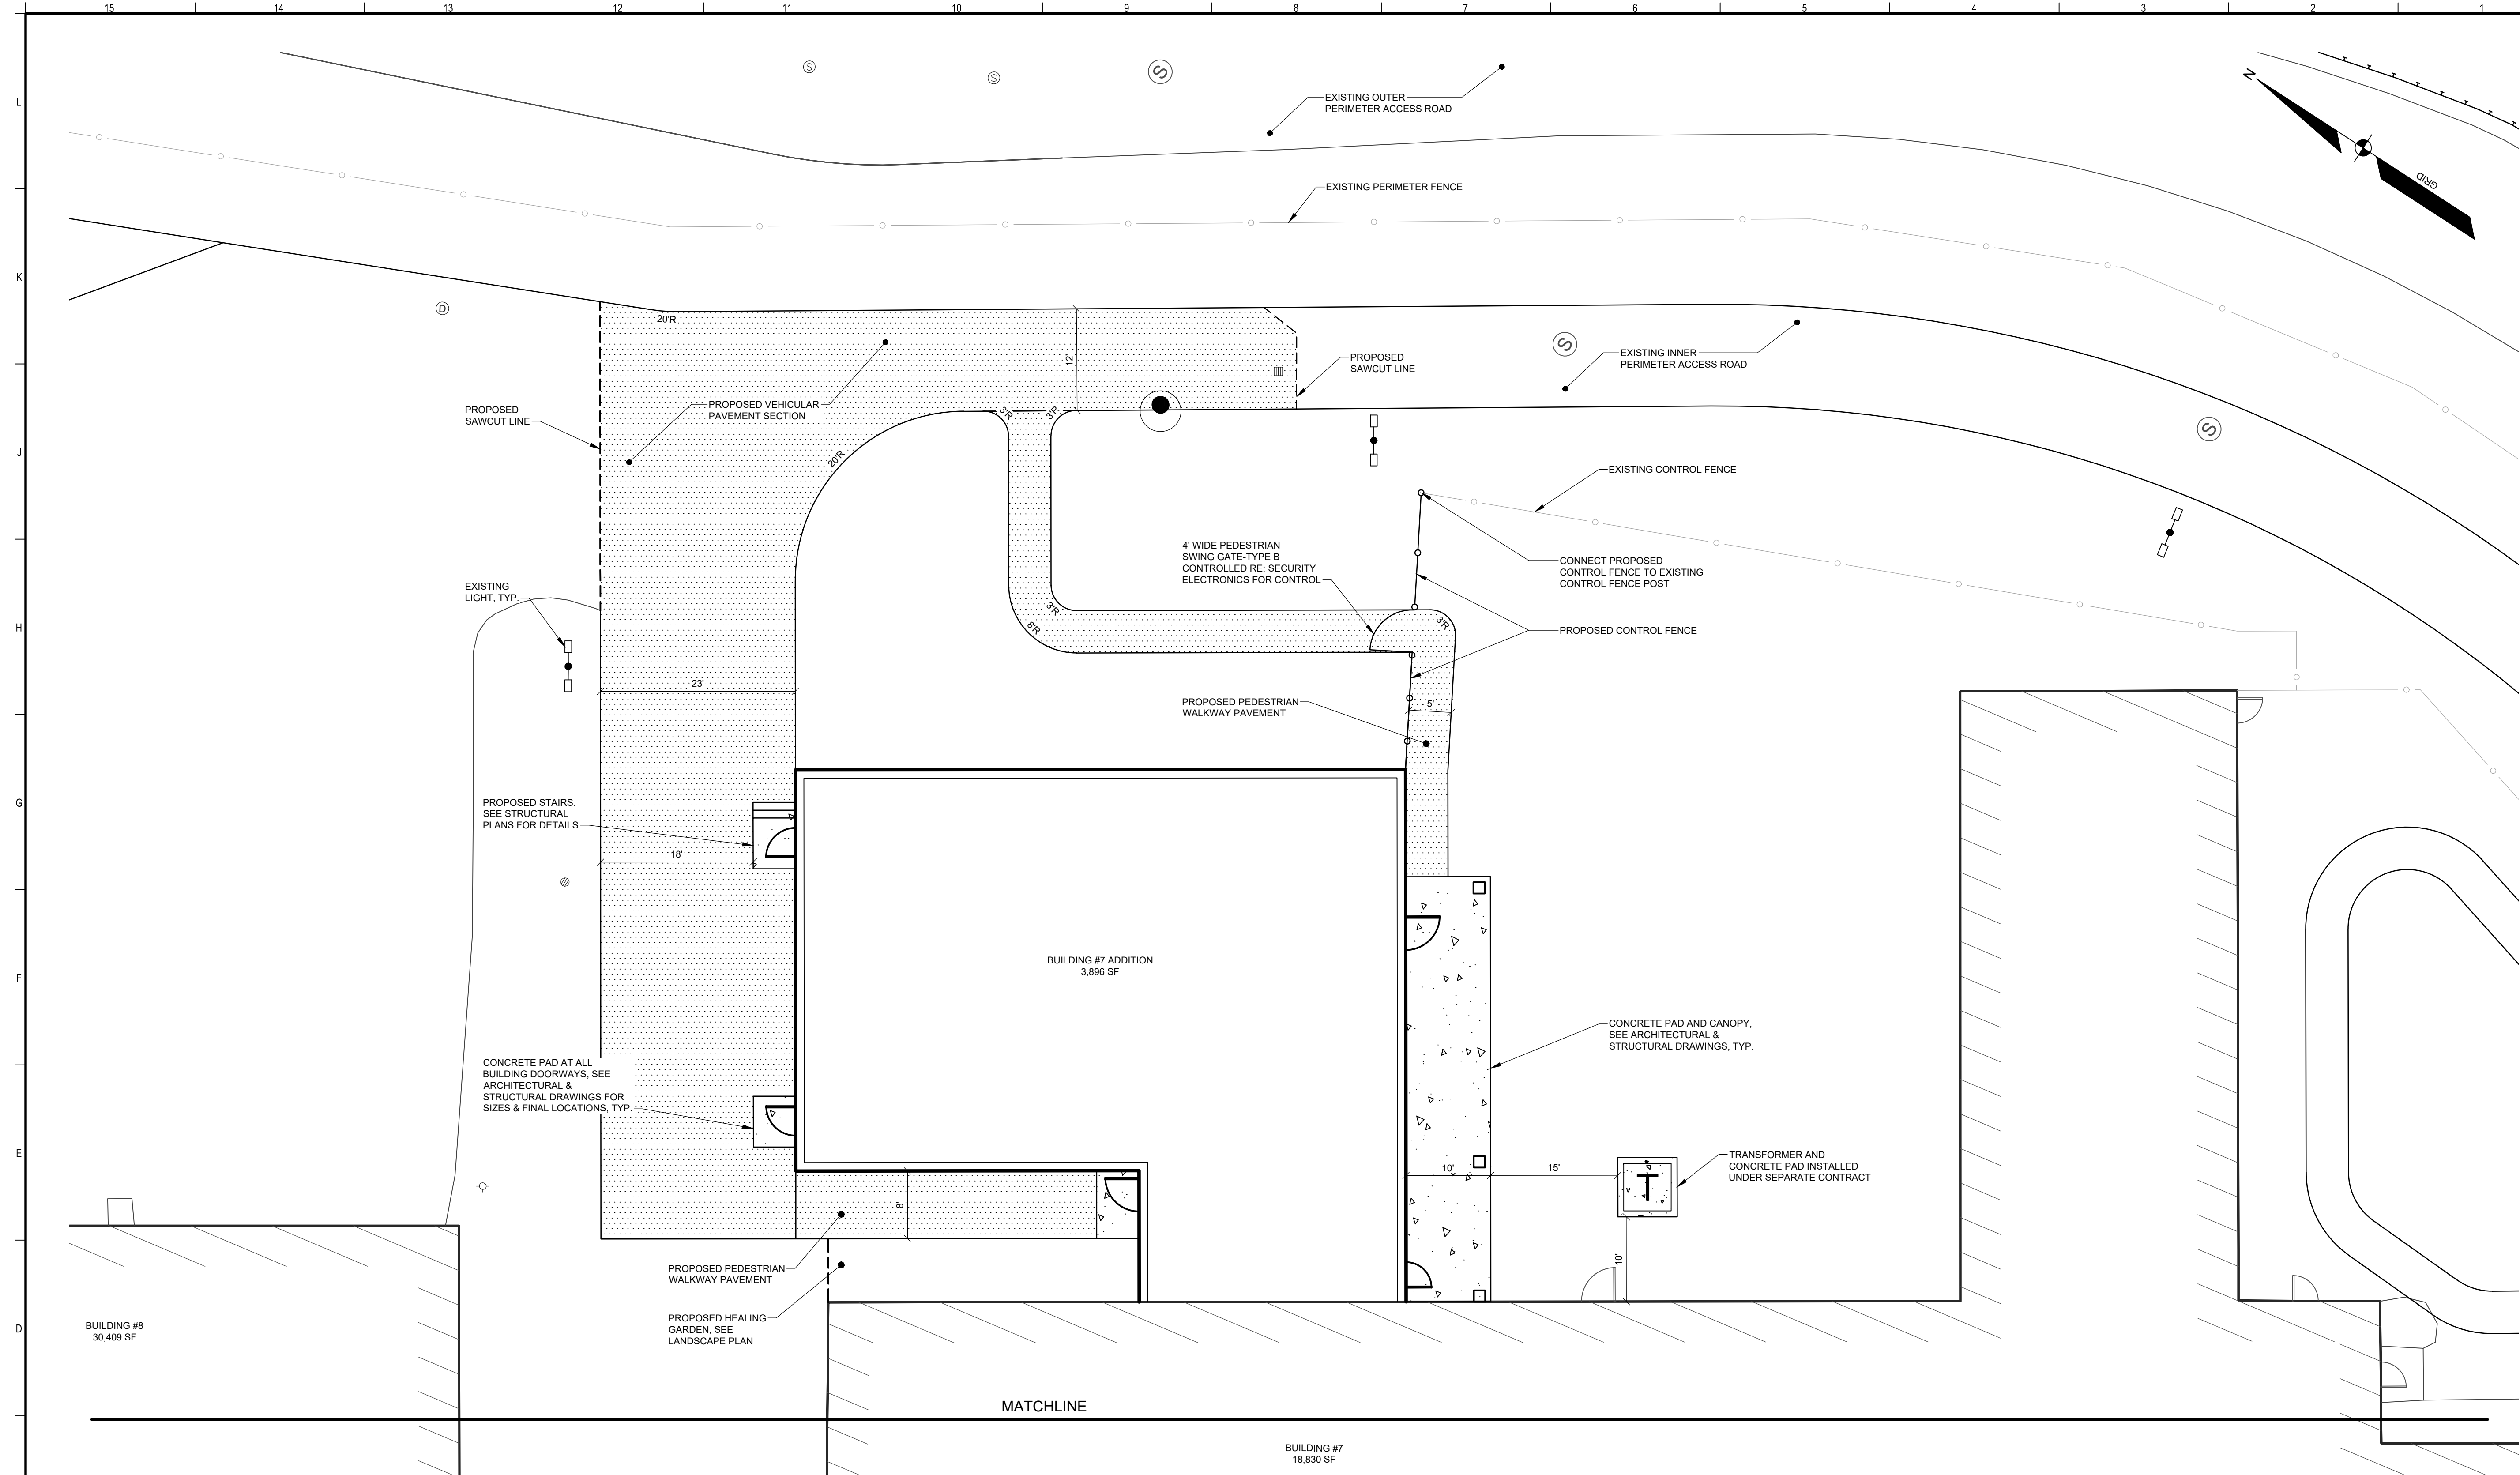


PLAN:  
SCALE: 1" = 10'

CONDITIONS OF APPROVAL:

- APPROVAL IS DEPENDENT UPON AND LIMITED TO THE PROPOSALS AND PLANS CONTAINED IN THE APPLICATION DATED JUNE 7, 2024 AS AMENDED JULY 22, 2024 AND SUPPORTING DOCUMENTS AND ORAL REPRESENTATIONS SUBMITTED AND AFFIRMED BY THE APPLICANT, AND CONDITIONS, IF ANY, IMPOSED BY THE PLANNING BOARD. ANY VARIATION FROM SUCH PLANS, PROPOSALS, SUPPORTING DOCUMENTS, AND REPRESENTATIONS IS SUBJECT TO REVIEW AND APPROVAL BY THE PLANNING BOARD OR THE TOWN PLANNER IN ACCORDANCE WITH OR §120-815 OF THE LAND USE ORDINANCE.
- IN ACCORDANCE WITH §120-815C(1)(B) OF THE LAND USE ORDINANCE, THE CONSTRUCTION OF IMPROVEMENTS COVERED BY ANY SITE PLAN APPROVAL SHALL BE COMPLETED WITHIN TWO YEARS OF THE DATE UPON WHICH THE PERFORMANCE GUARANTEE IS ACCEPTED BY THE TOWN MANAGER. IF CONSTRUCTION HAS NOT BEEN COMPLETED WITHIN THE SPECIFIED PERIOD, THE TOWN SHALL, AT THE TOWN MANAGER'S DISCRETION, USE THE PERFORMANCE GUARANTEE TO EITHER RECLAIM AND STABILIZE THE SITE OR TO COMPLETE THE IMPROVEMENTS AS SHOWN ON THE APPROVED PLAN.
- APPROVAL IS SUBJECT TO THE REQUIREMENTS OF THE POST-CONSTRUCTION STORMWATER ORDINANCE, CHAPTER 201 ARTICLE II. ANY PERSON OWNING, OPERATING, LEASING, OR HAVING CONTROL OVER STORMWATER MANAGEMENT FACILITIES REQUIRED BY THE POST-CONSTRUCTION STORMWATER MANAGEMENT PLAN MUST ANNUALLY ENGAGE THE SERVICES OF A QUALIFIED THIRD-PARTY INSPECTOR WHO MUST CERTIFY COMPLIANCE WITH THE POST-CONSTRUCTION STORMWATER MANAGEMENT PLAN ON OR BY JUNE 1ST OF EACH YEAR.
- THE DEVELOPMENT IS SUBJECT TO THE FOLLOWING ARTICLE 12 IMPACT FEES. TO BE PAID WITH THE ISSUANCE OF A BUILDING, PUBLIC SAFETY IMPACT FEE; AND MUNICIPAL OFFICE IMPACT FEE. ALL FEES WILL BE DETERMINED AND COLLECTED FOR ANY BUILDING, OR ANY OTHER PERMITS NECESSARY FOR THE DEVELOPMENT, §120-1201C.


APPROVAL-  
TOWN OF WINDHAM  
PLANNING BOARD

_____	DATE
_____	CHAIRPERSON
_____	
_____	
_____	
_____	
_____	

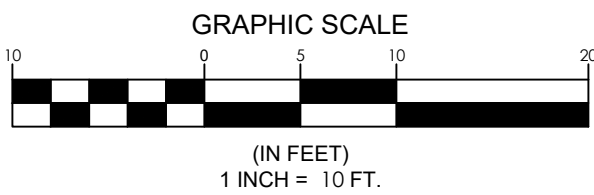


**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM

75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel. 207-200-2100

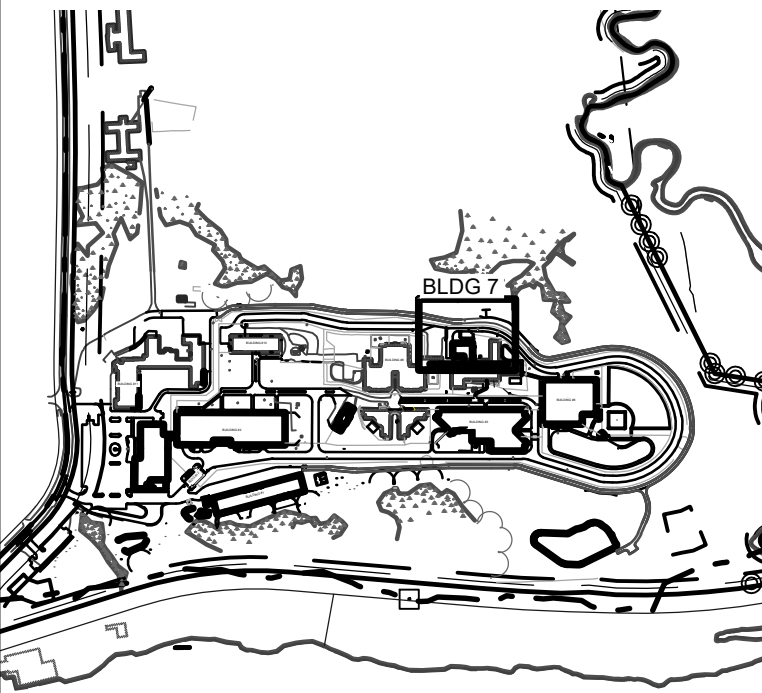

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:



**SMRT** SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION


MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

SITE PLAN


SHEET TITLE:	
SCALE:	
PROJECT MANAGER: OAM	PROJECT NO: 17052
A/E OF RECORD: OAM	
JOB CAPTAIN: BJB	
DRAWN BY: BJB	
SMRT FILE: 2.07CE202-17052	SHEET NO. 2.07CE202

NOT FOR CONSTRUCTION




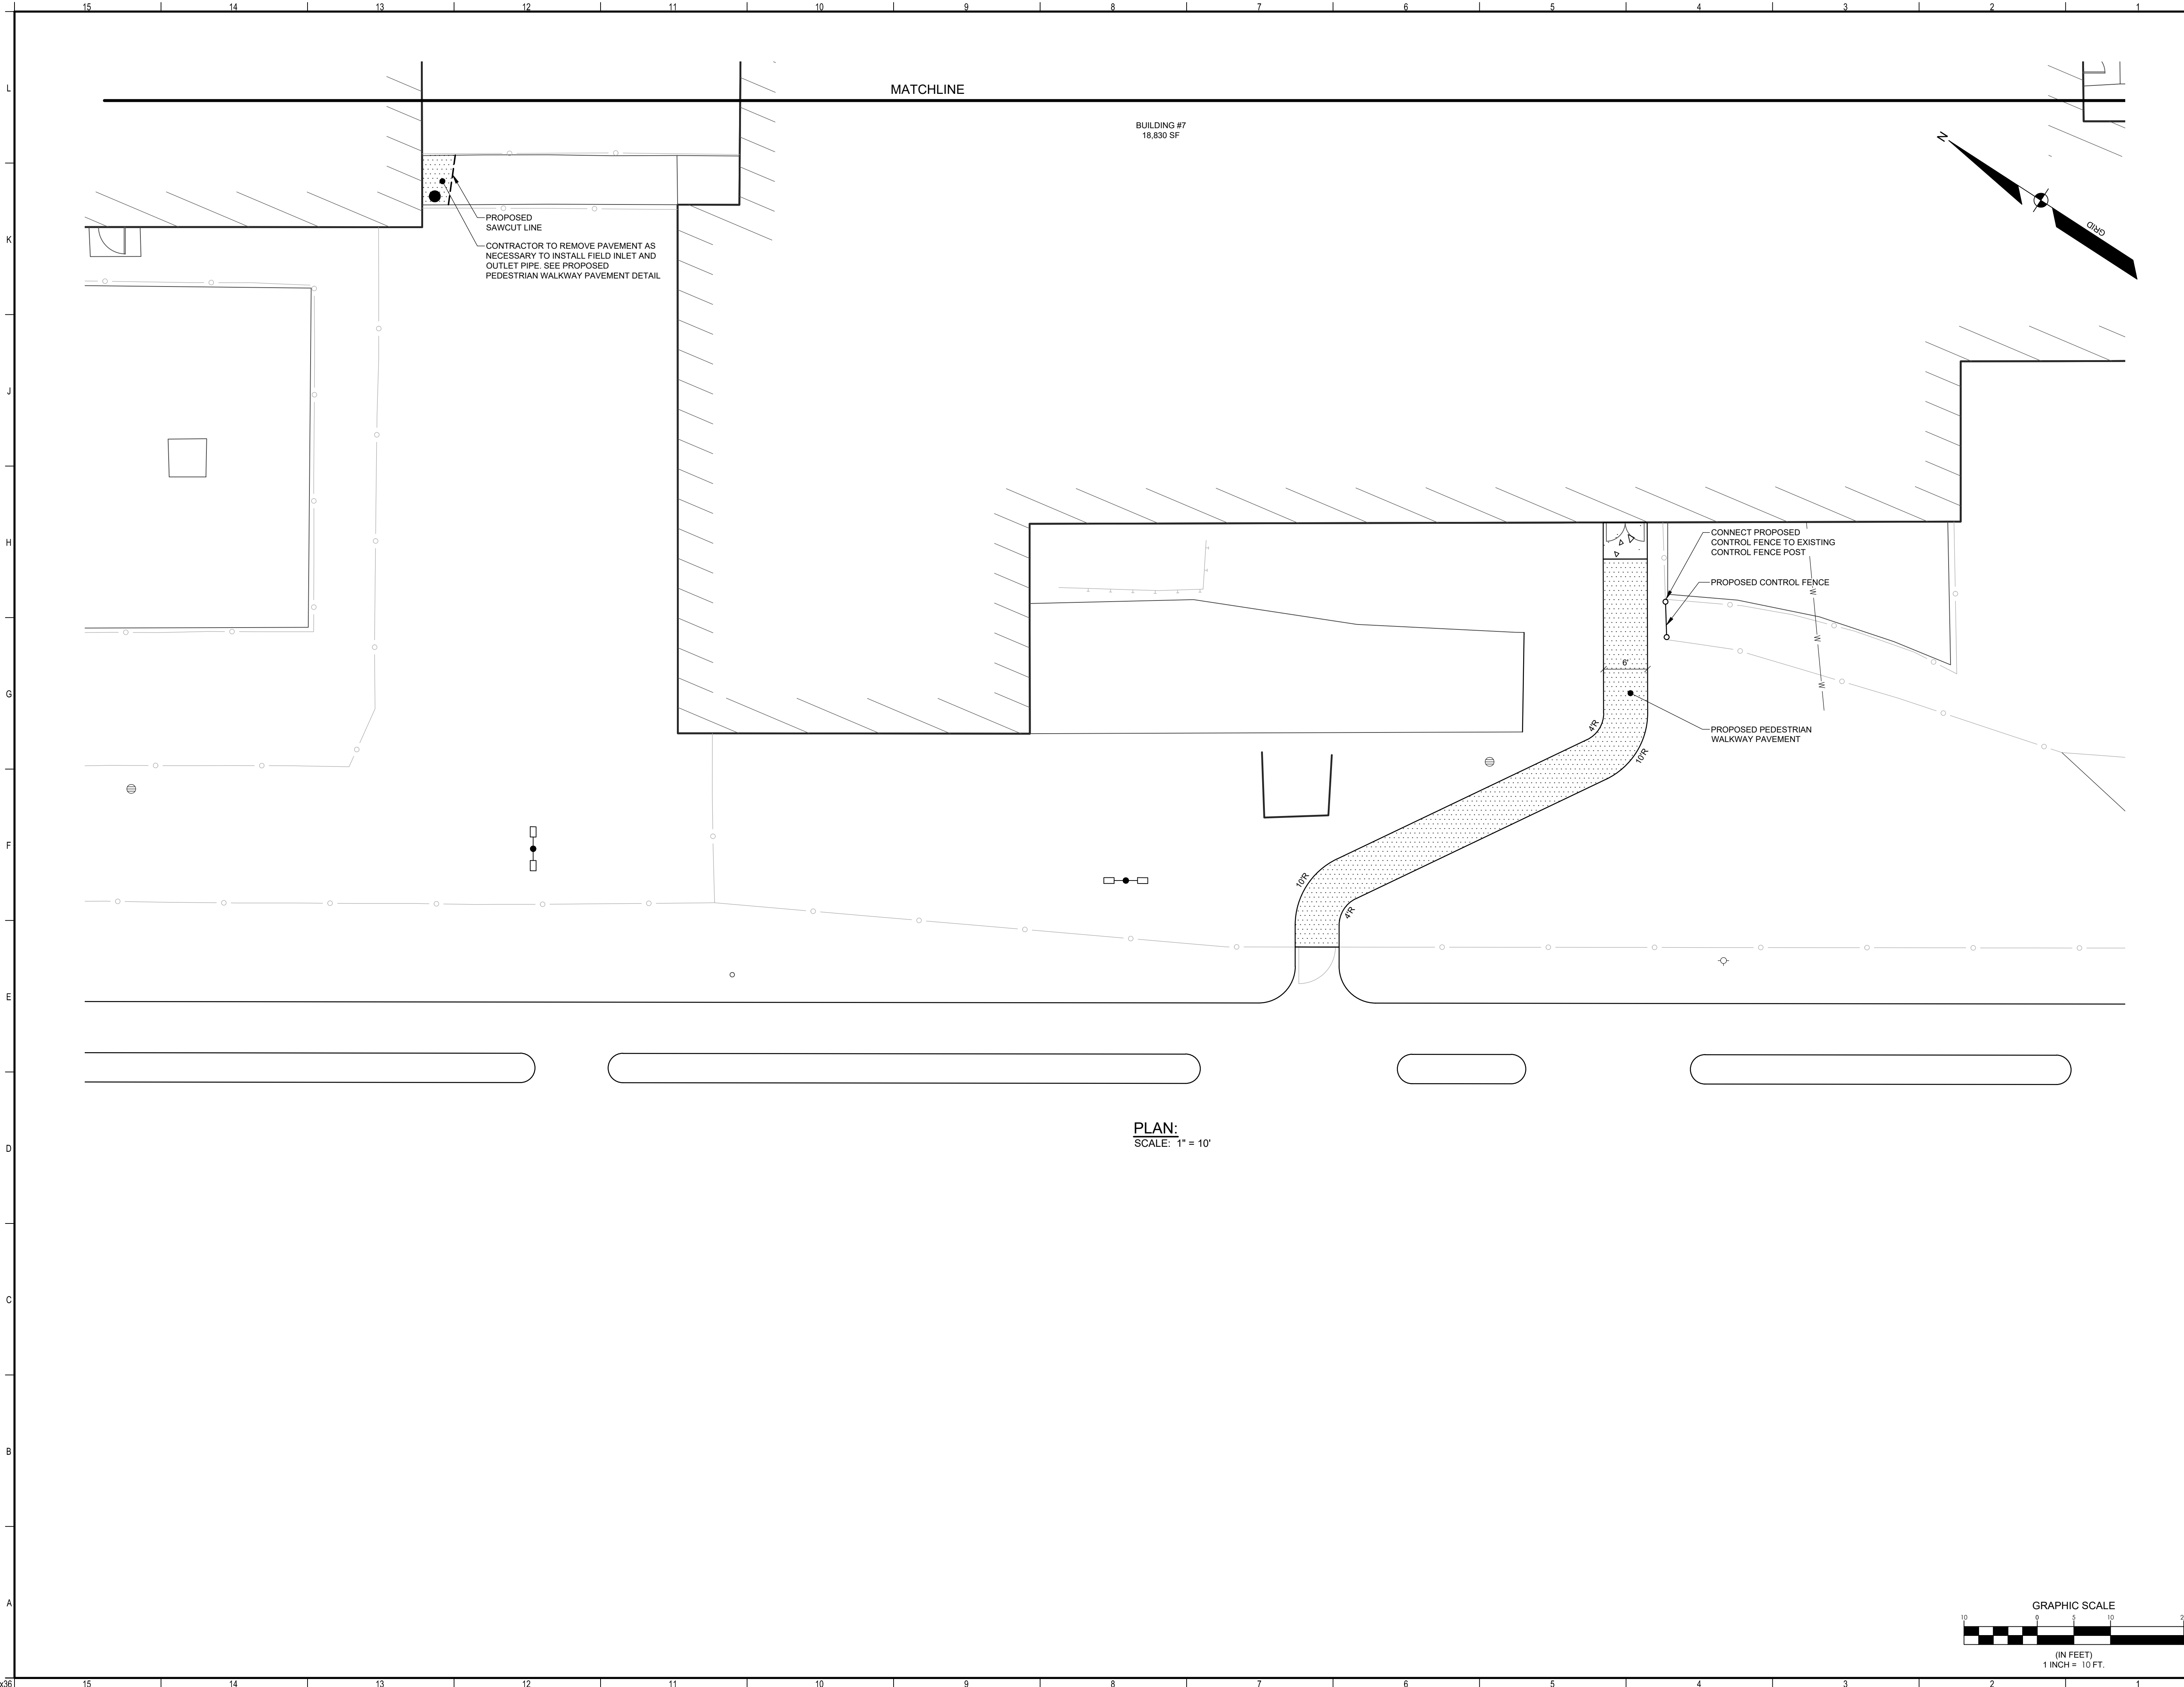

PLAN:  
SCALE: 1" = 10'

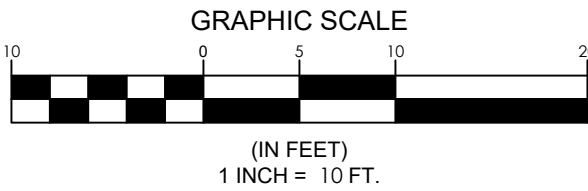


**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

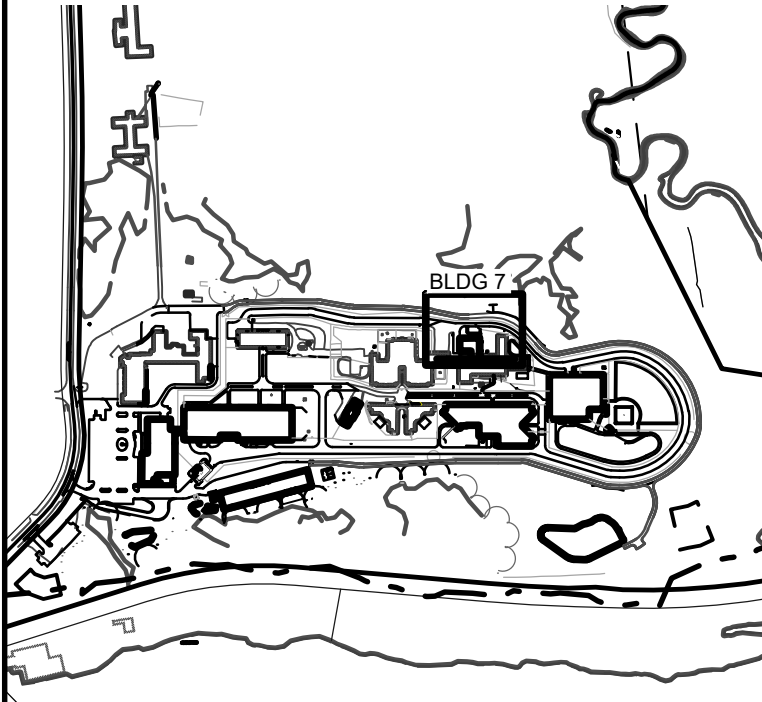

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

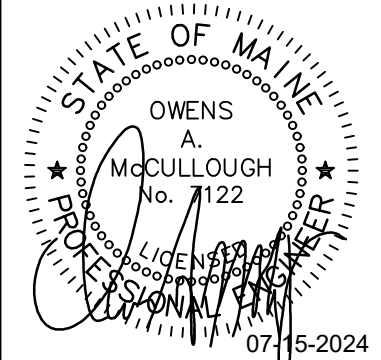


**SMRT**  
SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtninc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

SITE PLAN




PROJECT MANAGER:	OAM	PROJECT NO:	17052
A/E OF RECORD:	OAM		
JOB CAPTAIN:	BJB		
DRAWN BY:	BJB		
SMRT FILE:	2.07CE203-17052		

**2.07CE203**



SHEET NO. ©COPYRIGHT 2015 SMRT INC

NOT FOR CONSTRUCTION



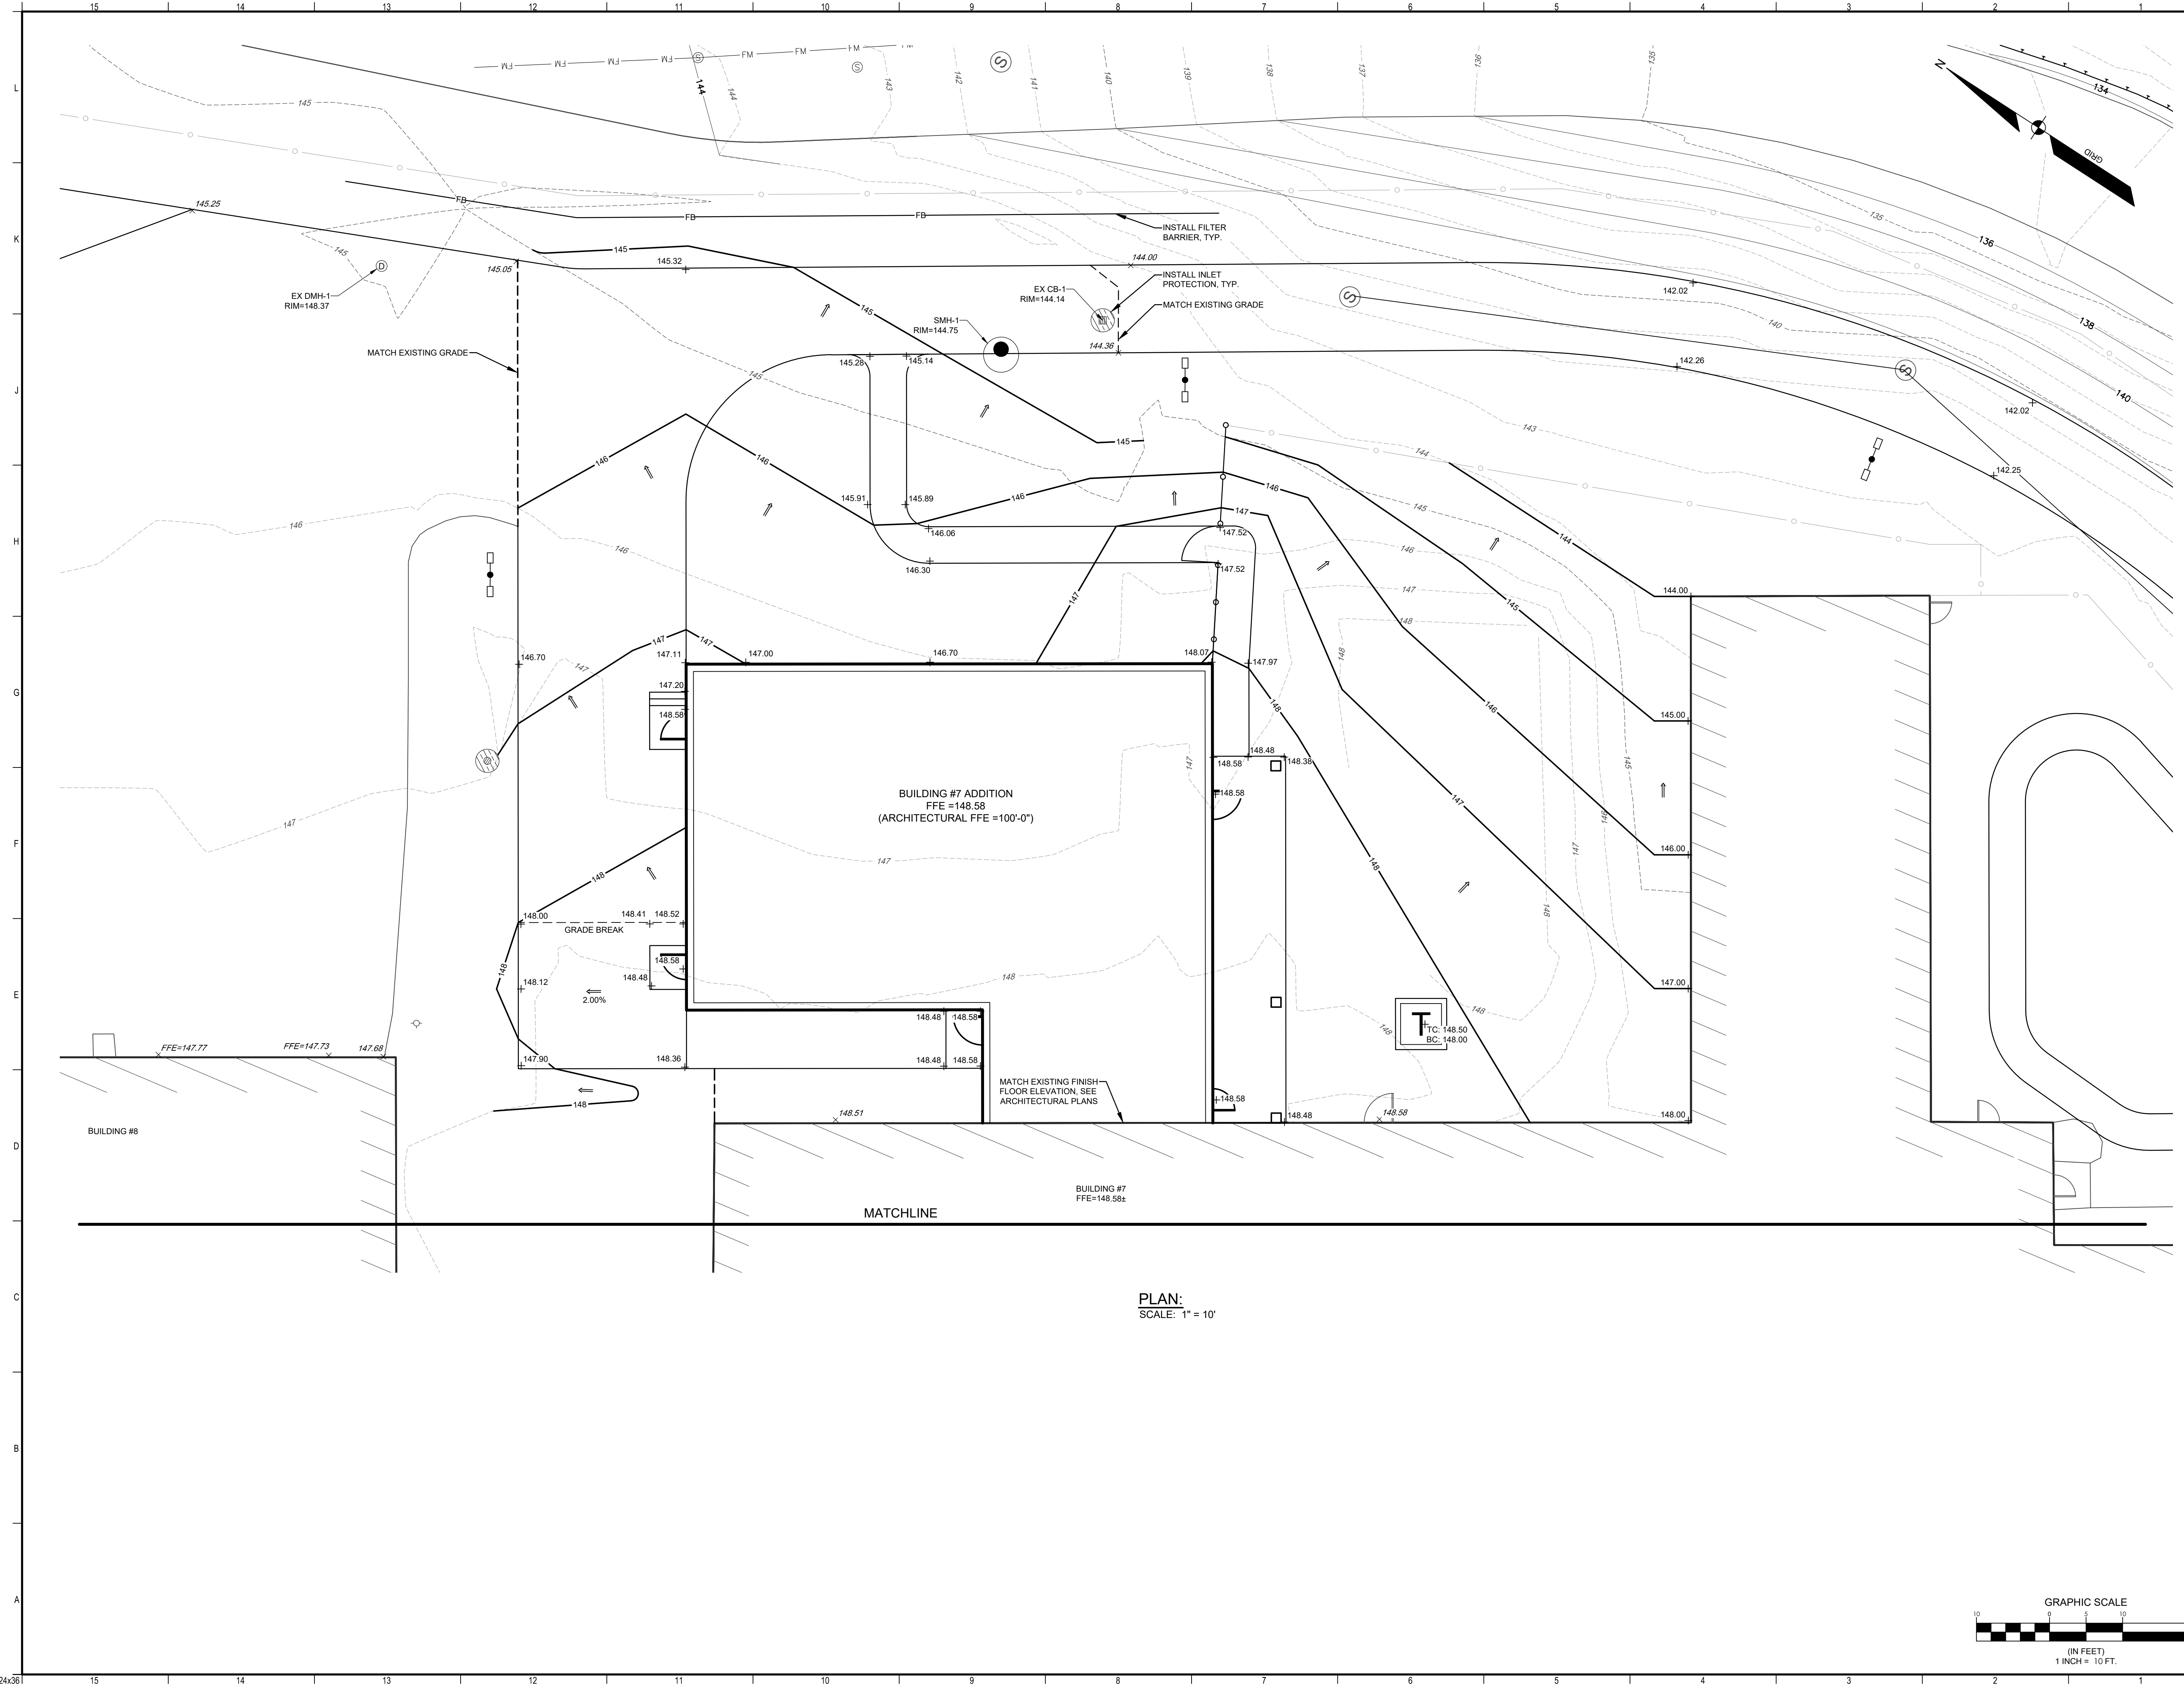


PLAN:  
SCALE: 1" = 10'

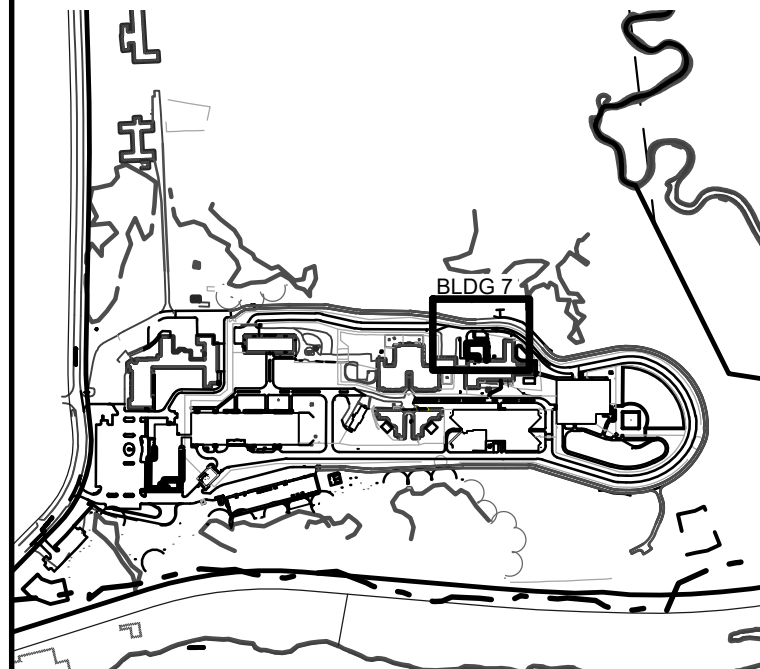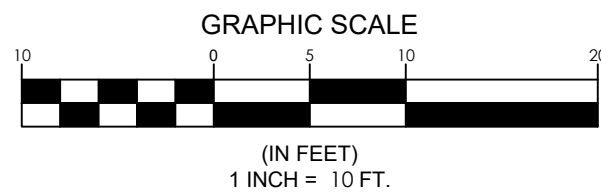

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

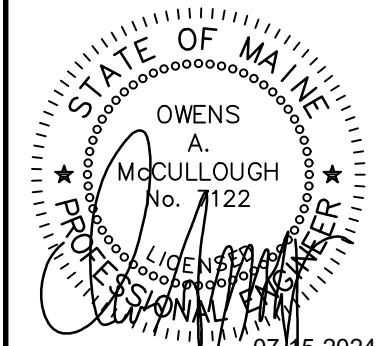




SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtninc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

GRADING PLAN



SHEET TITLE:	
PROJECT MANAGER:	OAM
A/E OF RECORD:	OAM
JOB CAPTAIN:	BJB
DRAWN BY:	BJB
SMRT FILE:	2.07CE301-17052
PROJECT NO:	17052
2.07CE301	
SHEET No.	

NOT FOR CONSTRUCTION












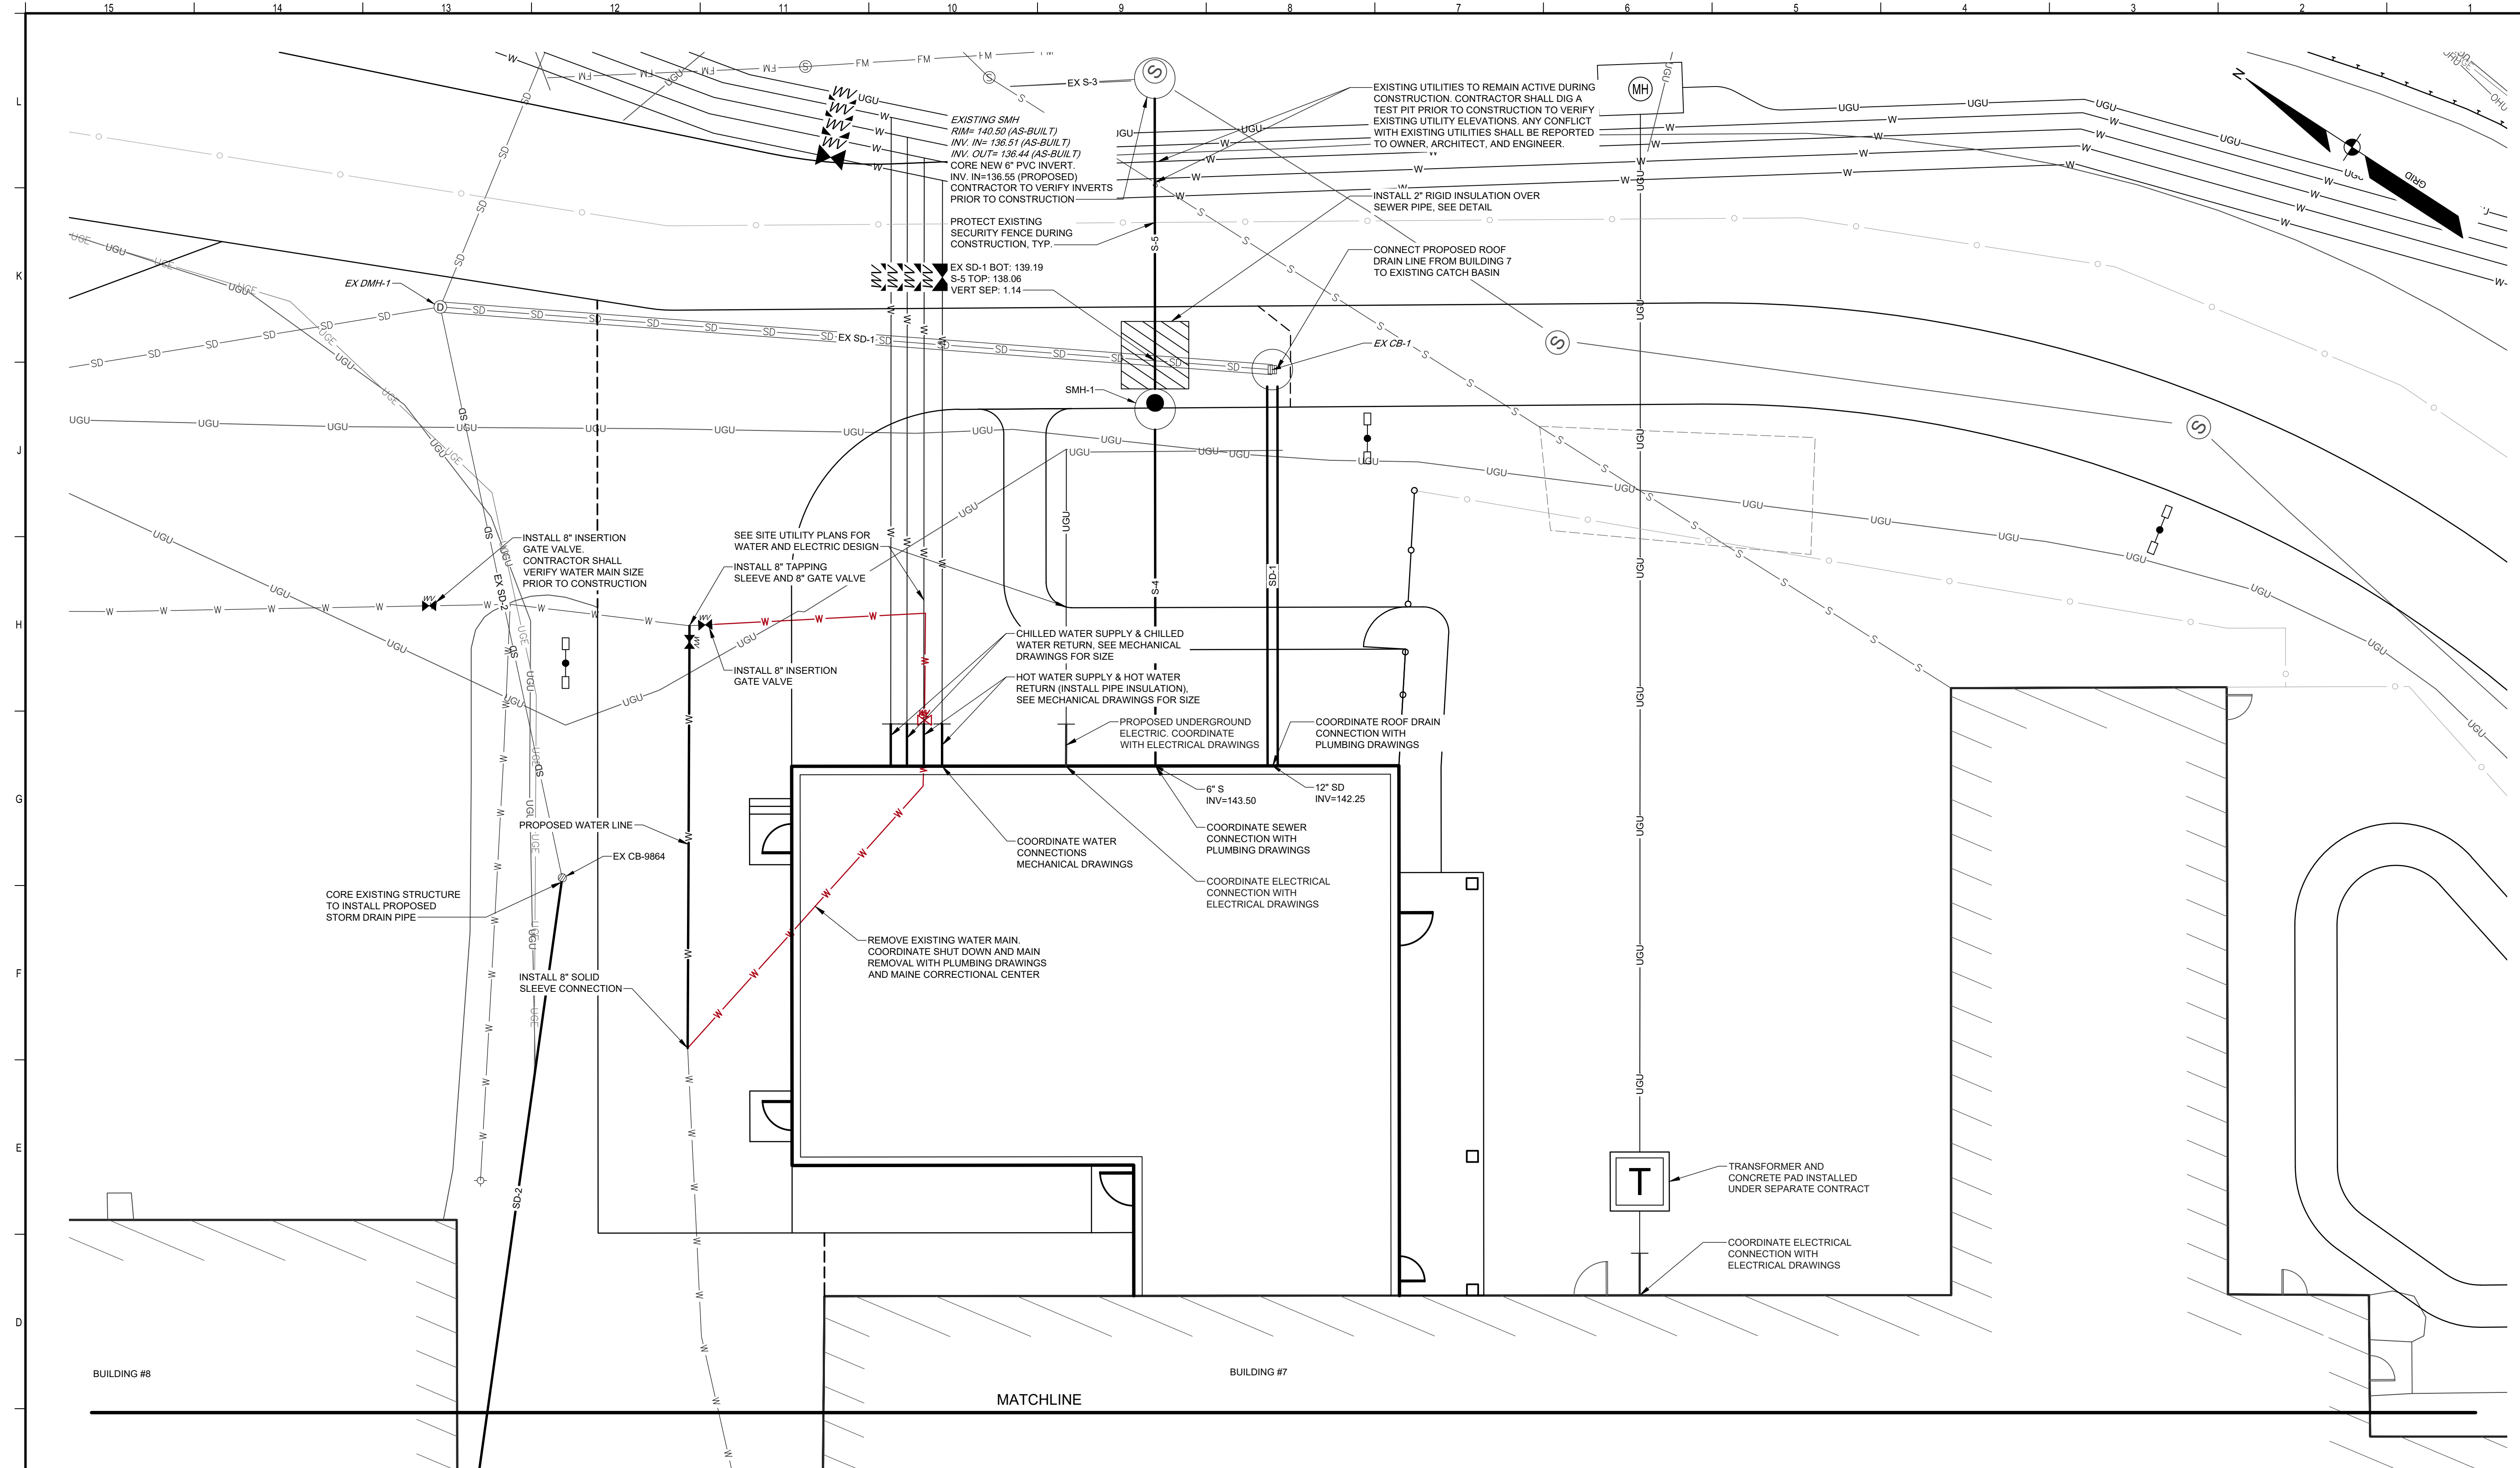

PLAN:  
SCALE: 1" = 10'


STORM DRAIN STRUCTURE DATA				
STRUCTURE	RIM	INV. IN	INV. OUT	DIAM.
EX CB-1	144.14	140.00 (SD-1)	139.54 (EX SD-1)	48"
EX CB-9864	146.83	142.58 (SD-2)	142.48 (EX SD-2)	48"
EX DMH-1	148.37	137.83 (EX SD-1) 137.83 (EX SD-2)		48"
FI-1	147.80		143.35 (SD-2)	12"

STORM DRAIN PIPE DATA			
NAME	SIZE	LENGTH	SLOPE
EX SD-1	12"	95'	1.80%
EX SD-2	10"	65'	7.12%
SD-1	12"	45'	5.00%
SD-2	10"	75'	1.03%

SANITARY SEWER STRUCTURE DATA				
STRUCTURE	RIM	INV. IN	INV. OUT	SIZE
EX SMH-2	143.60	137.20 (S-5)	136.44 (EX S-3)	48" DIA
SMH-1	144.75	141.00 (S-4)	137.60 (S-5)	48" DIA


SANITARY SEWER PIPE DATA			
NAME	SIZE	LENGTH	SLOPE
EX S-3	8"	15'	1.12%
S-4	6"	40'	6.20%
S-5	6"	35'	1.13%

**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

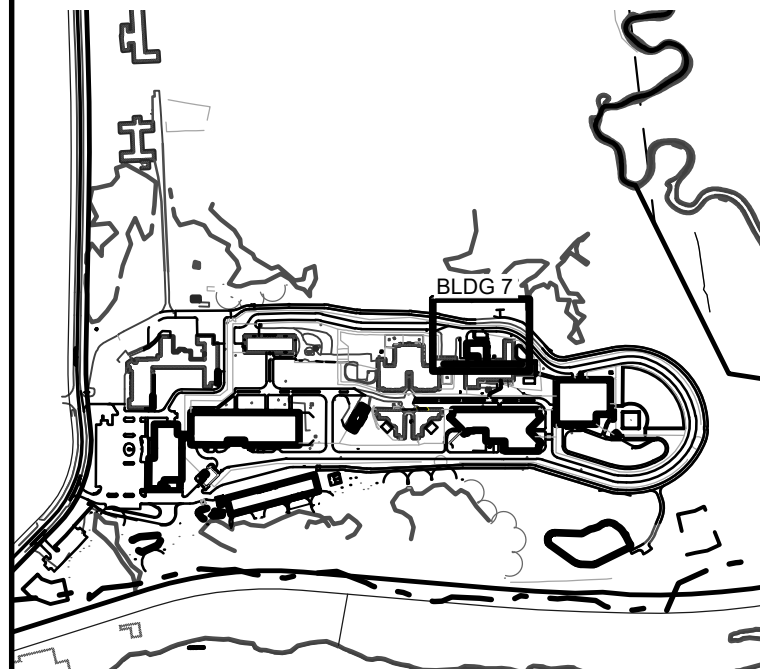

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

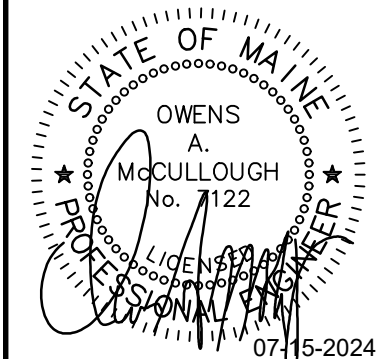


**SMRT** SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL


UTILITY PLAN



SCALE:	PROJECT NO:	17052
PROJECT MANAGER: OAM	A/E OF RECORD: OAM	
JOB CAPTAIN: BJB	DRAWN BY: BJB	
SMRT FILE: 2.07CE401-17052	SHEET NO:	2.07CE401

NOT FOR CONSTRUCTION



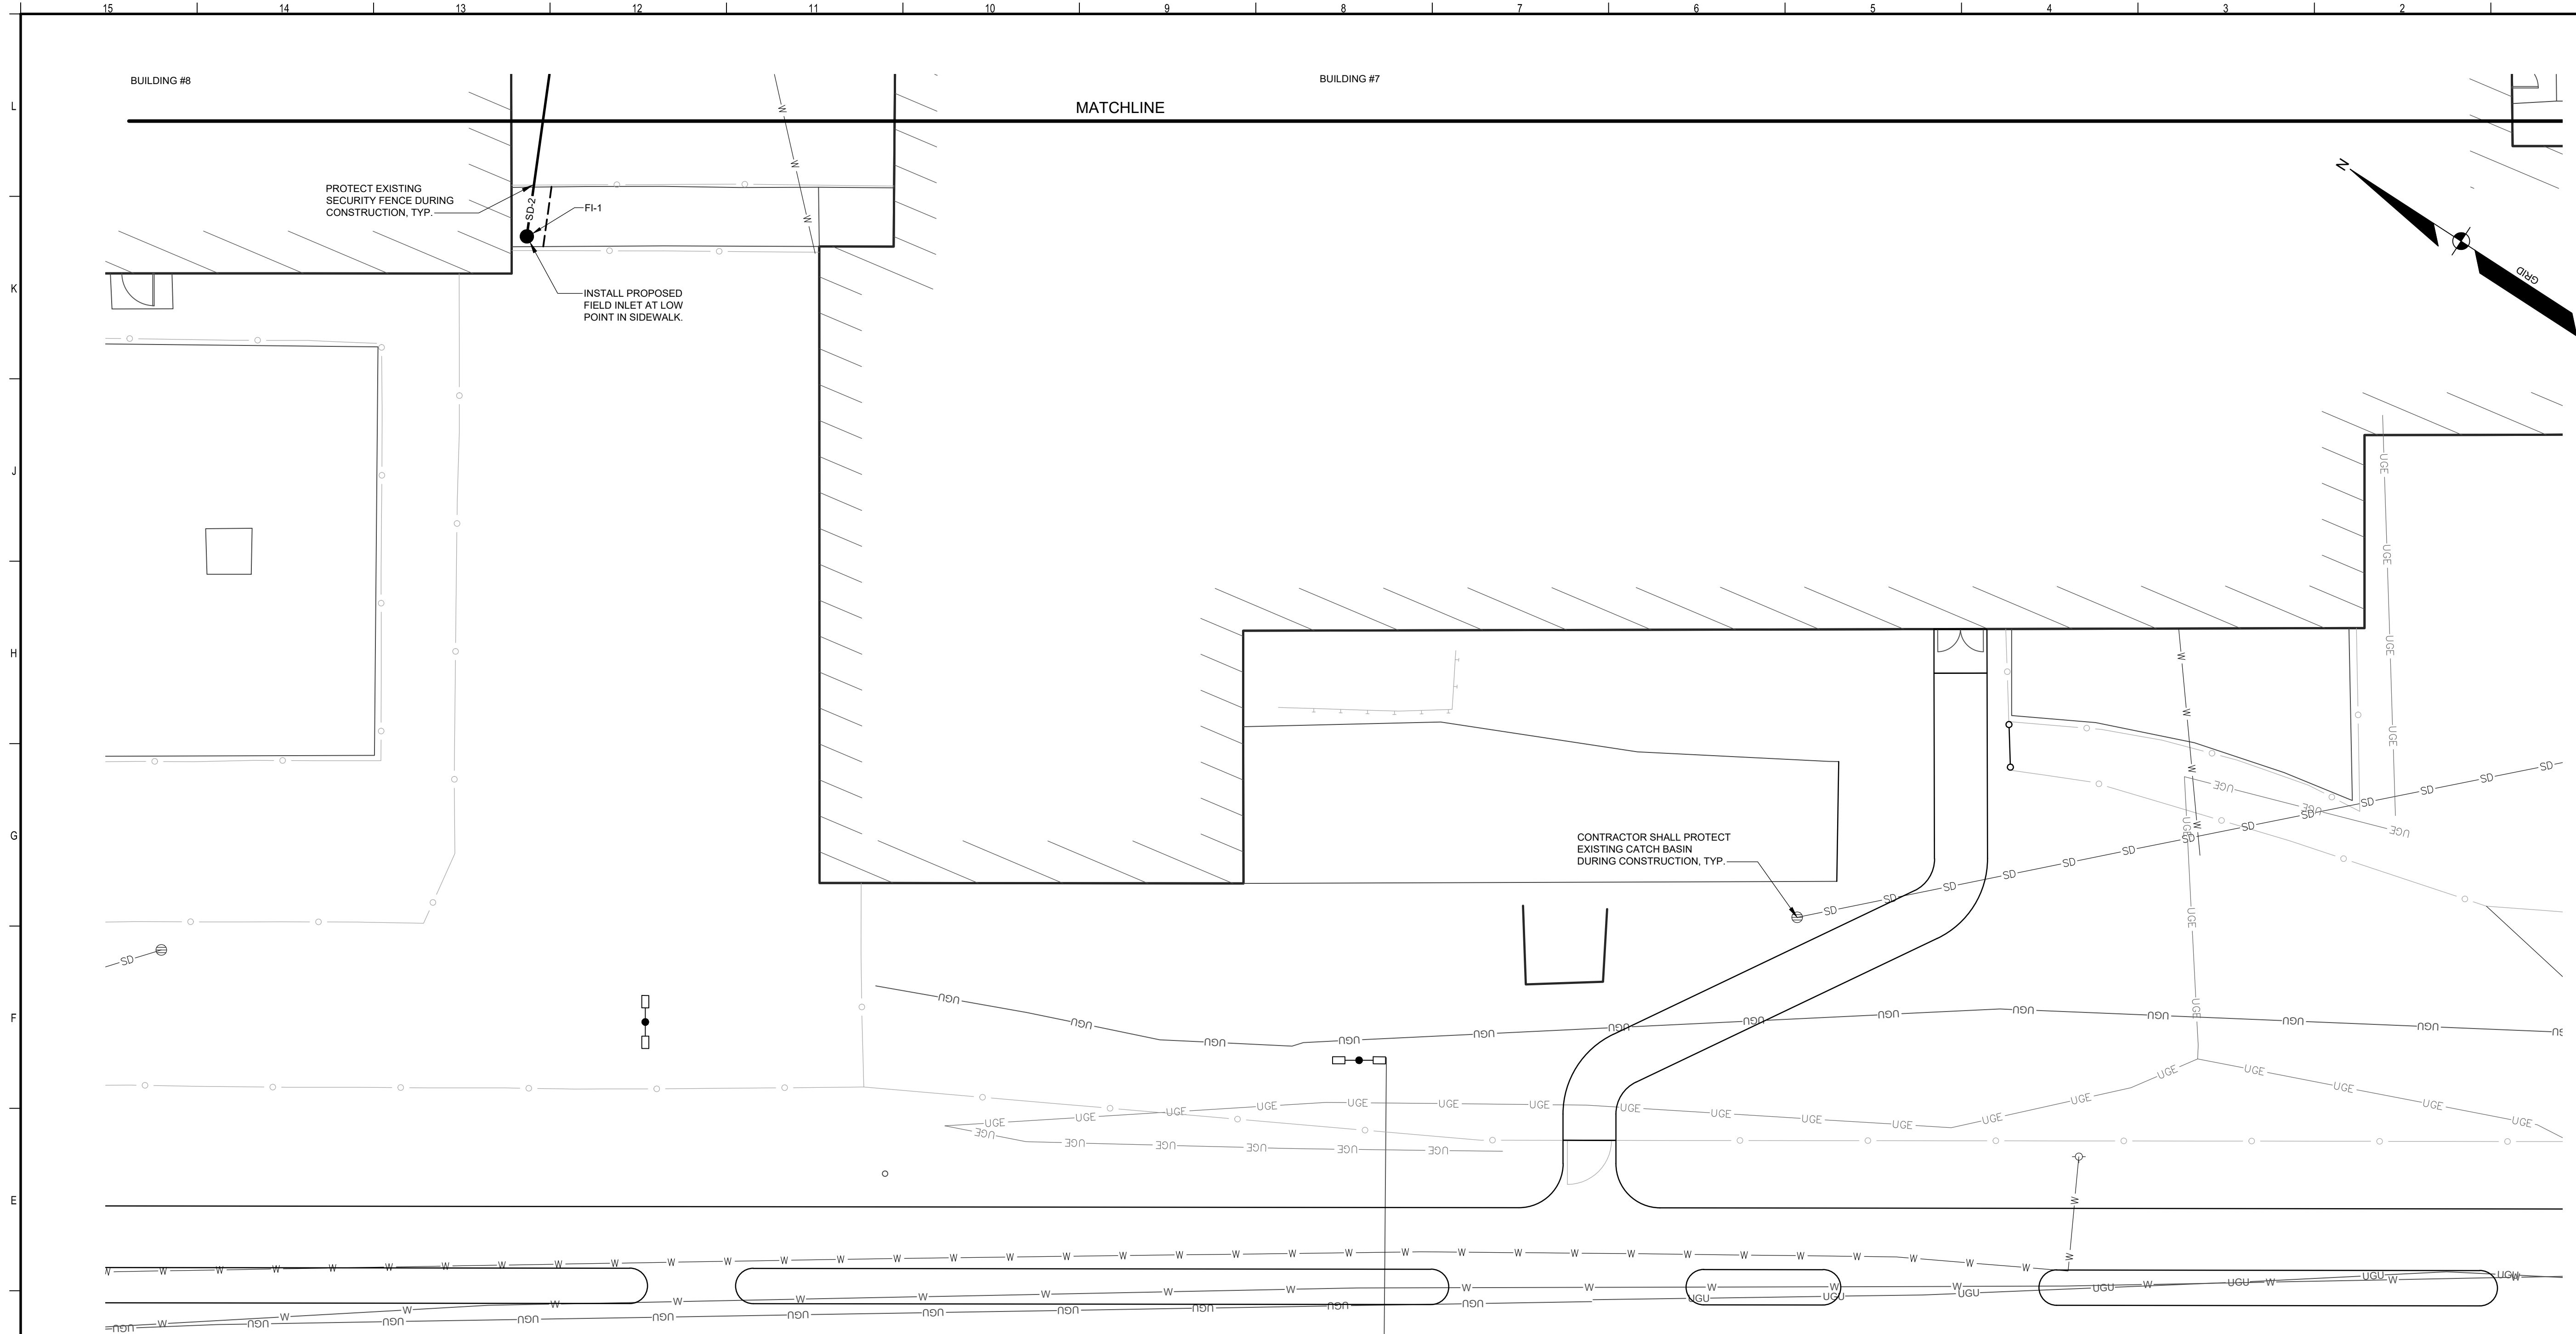


PLAN:  
SCALE: 1" = 10'

STORM DRAIN STRUCTURE DATA				
STRUCTURE	RIM	INV. IN	INV. OUT:	DIAM.
EX CB-1	144.14	140.00 (SD-1)	139.54 (EX SD-1)	48"
EX CB-9864	146.83	142.58 (SD-2)	142.48 (EX SD-2)	48"
EX DMH-1	148.37	137.83 (EX SD-1) 137.83 (EX SD-2)		48"
FI-1	147.80		143.35 (SD-2)	12"


STORM DRAIN PIPE DATA			
NAME	SIZE	LENGTH	SLOPE
EX SD-1	12"	95'	1.80%
EX SD-2	10"	65'	7.12%
SD-1	12"	45'	5.00%
SD-2	10"	75'	1.03%

SANITARY SEWER STRUCTURE DATA				
STRUCTURE	RIM	INV. IN	INV. OUT:	SIZE
EX SMH-2	143.60	137.20 (S-5)	136.44 (EX S-3)	48" DIA
SMH-1	144.75	141.00 (S-4)	137.60 (S-5)	48" DIA

SANITARY SEWER PIPE DATA			
NAME	SIZE	LENGTH	SLOPE
EX S-3	8"	15'	1.12%
S-4	6"	40'	6.20%
S-5	6"	35'	1.13%

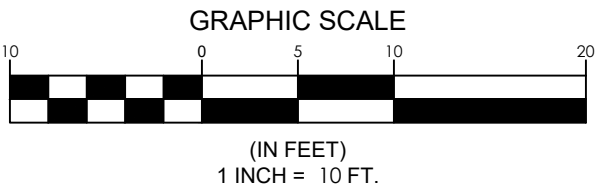


**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

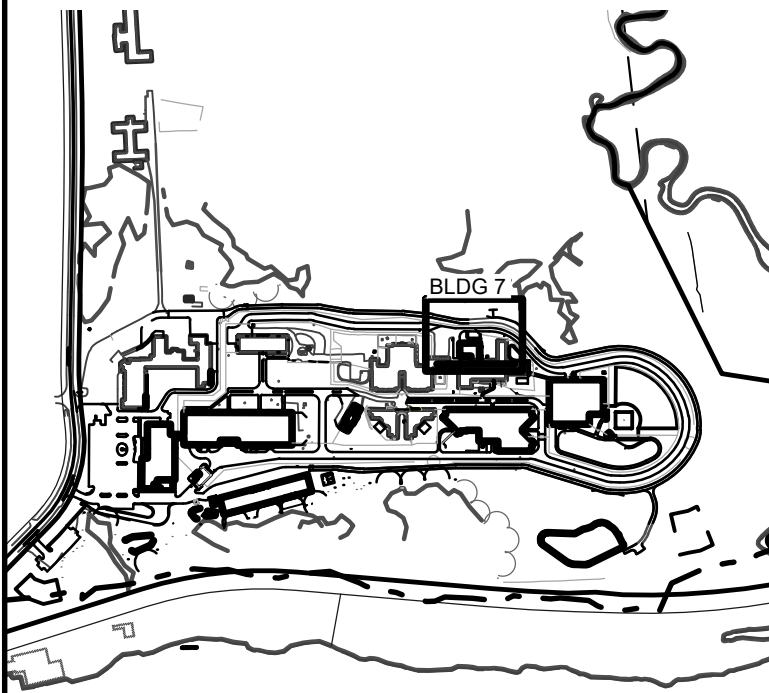

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

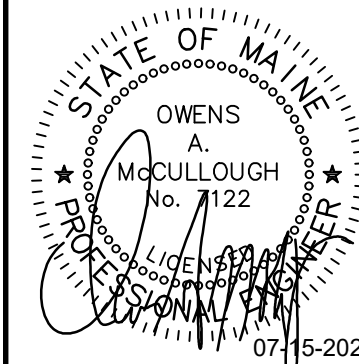

**SMRT**  
Architecture • Engineering • Planning  
SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

UTILITY PLAN



SHEET TITLE:	
SCALE:	
PROJECT MANAGER: OAM	PROJECT NO: 17052
A/E OF RECORD: OAM	
JOB CAPTAIN: BJB	
DRAWN BY: BJB	
SMRT FILE: 2.07CE402-17052	

**2.07CE402**

SHEET NO. ©COPYRIGHT 2015 SMRT INC.

NOT FOR CONSTRUCTION




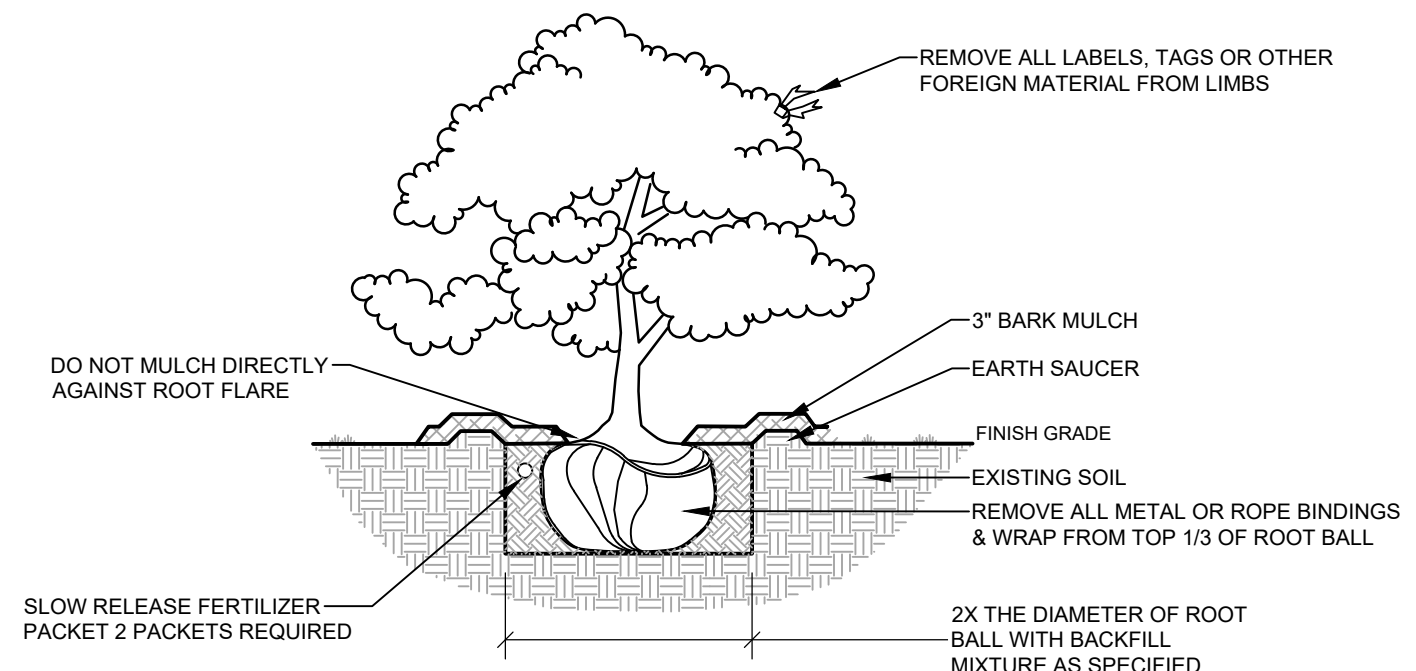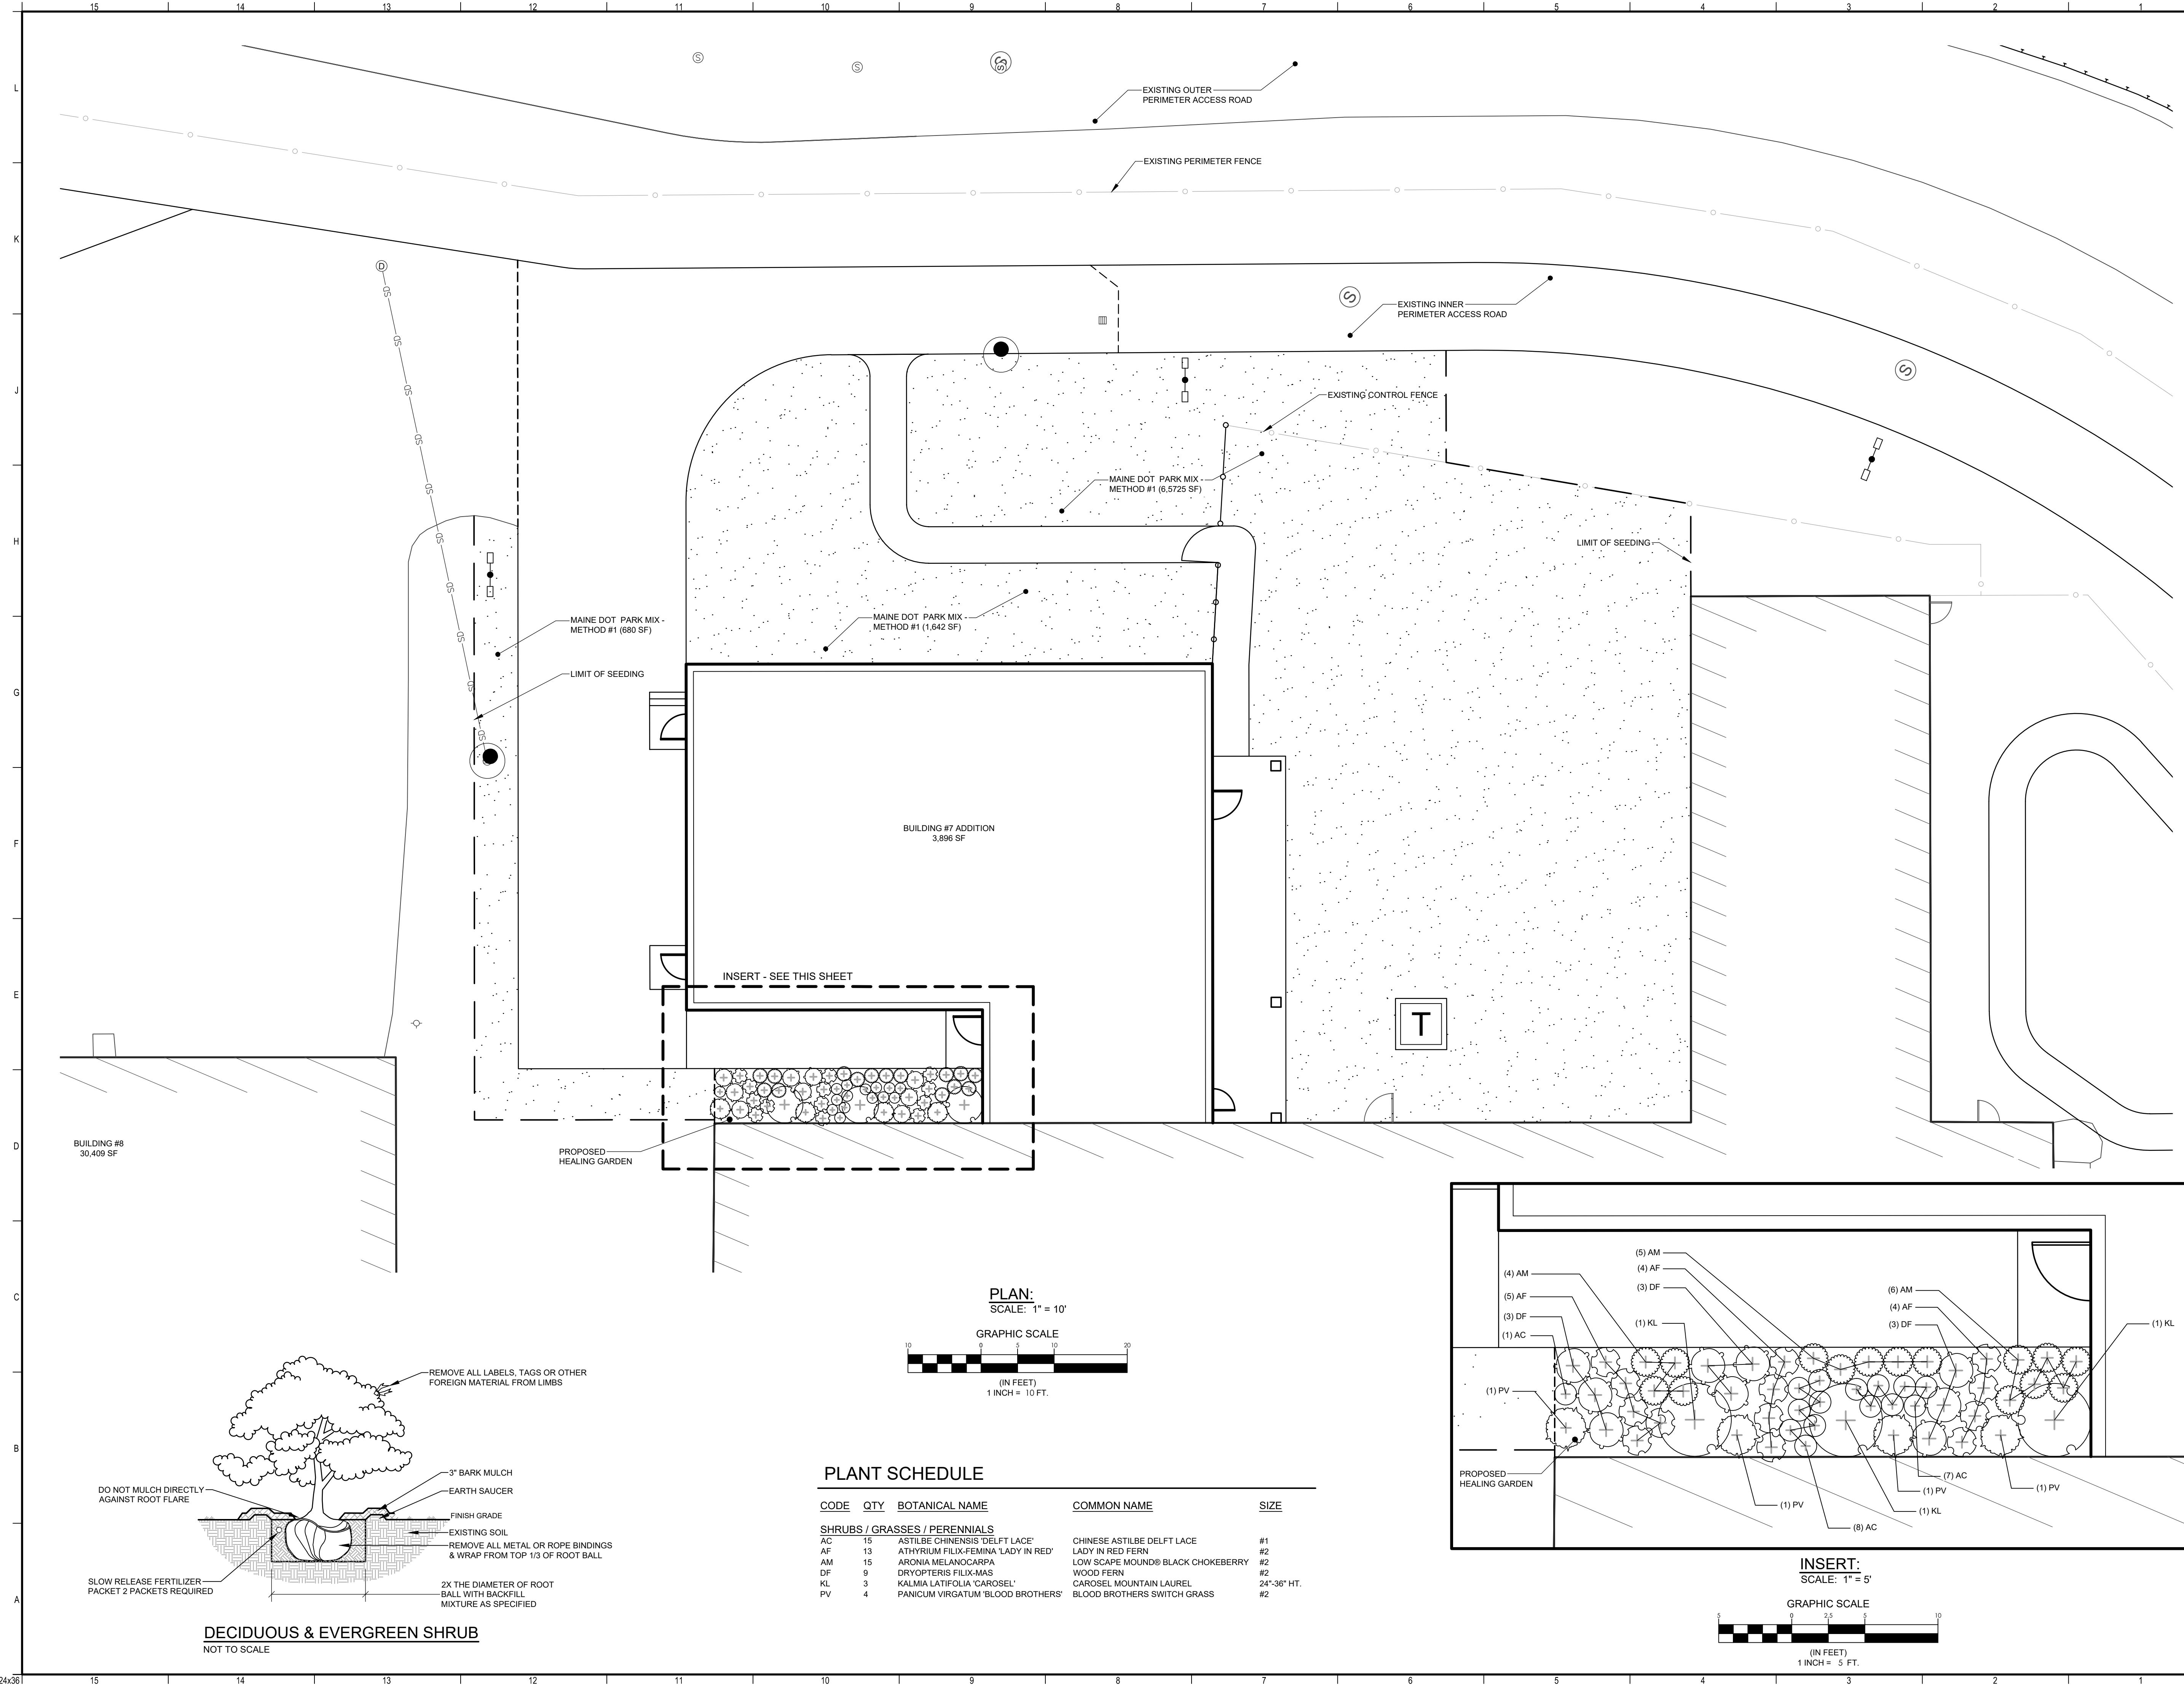


DECIDUOUS & EVERGREEN SHRUB  
NOT TO SCALE

PLANT SCHEDULE


CODE	QTY	BOTANICAL NAME	COMMON NAME	SIZE
SHRUBS / GRASSES / PERENNIALS				
AC	15	ASTILBE CHINENSIS 'DELFT LACE'	CHINESE ASTILBE DELFT LACE	#1
AF	13	ATHYRIUM FILIX-FEMINA 'LADY IN RED'	LADY IN RED FERN	#2
AM	15	ARONIA MELANOCARPA	LOW SCAPE MOUND® BLACK CHOKEBERRY	#2
DF	9	DRYOPTERIS FILIX-MAS	WOOD FERN	#2
KL	3	KALMIA LATIFOLIA 'CAROUSEL'	CAROUSEL MOUNTAIN LAUREL	24\"/>
PV	4	PANICUM VIRGATUM 'BLOOD BROTHERS'	BLOOD BROTHERS SWITCH GRASS	#2

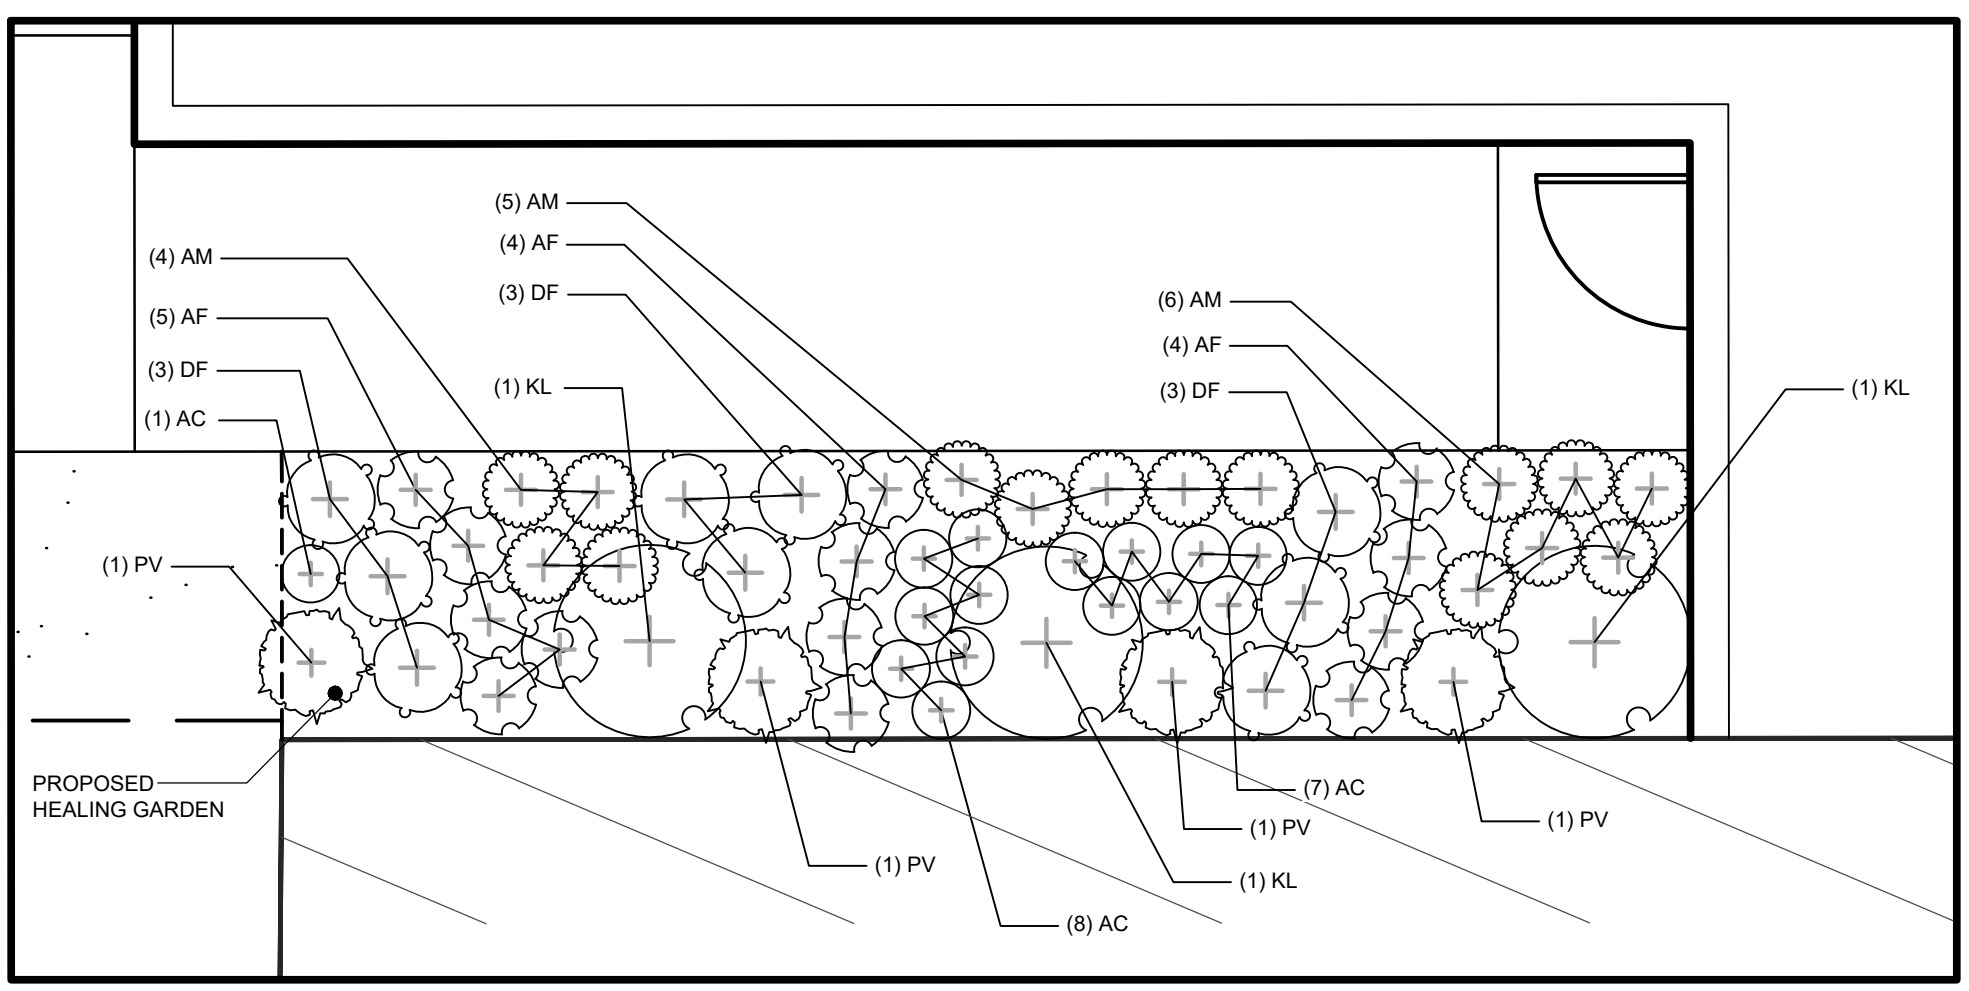

INSERT:  
SCALE: 1" = 5'

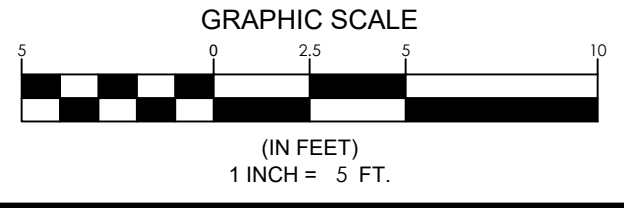

**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

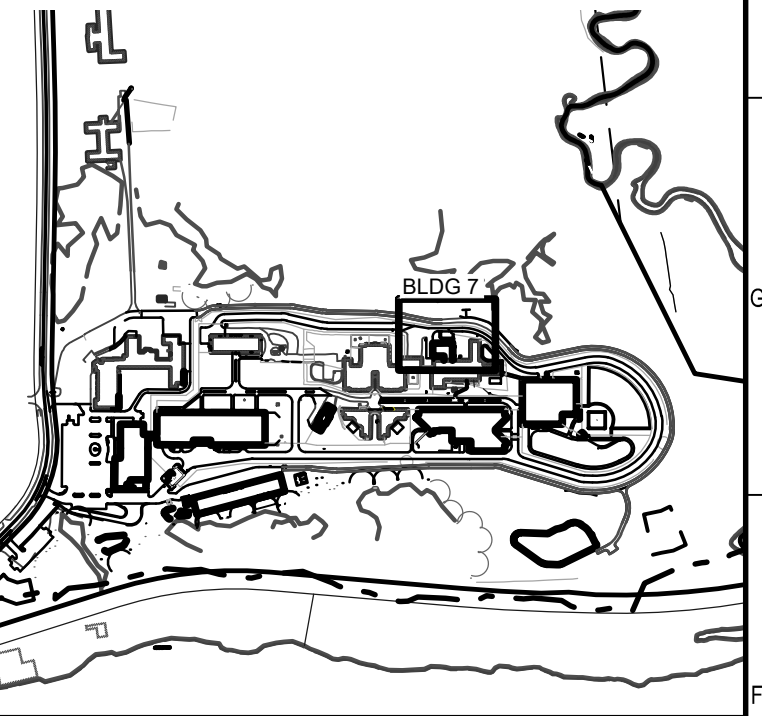

REV	DESCRIPTION	DATE
B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

**SMRT** SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtninc.com  
Architecture • Engineering • Planning

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

LANDSCAPE PLAN

SHEET TITLE:  
0 1.25 2.5 5 10 15  
SCALE:  
PROJECT MANAGER: OAM PROJECT NO: 17052  
A/E OF RECORD: OAM  
JOB CAPTAIN: BJB  
DRAWN BY: BJB  
SMRT FILE: 2.07CE501-17052 SHEET NO. 2.07CE501  
NOT FOR CONSTRUCTION



EROSION CONTROL MEASURES

PRE-CONSTRUCTION PHASE

PRIOR TO THE BEGINNING OF ANY CONSTRUCTION, SEDIMENT BARRIERS (SILT FENCE) WILL BE STAKED/INSTALLED ACROSS THE SLOPE(S), ON THE CONTOUR AT OR JUST BELOW THE LIMITS OF CLEARING OR GRUBBING, AND/OR JUST ABOVE ANY ADJACENT PROPERTY LINE OR WATERCOURSE TO PROTECT AGAINST CONSTRUCTION RELATED EROSION. THE PLACEMENT OF SEDIMENT BARRIERS SHALL BE COMPLETED IN ACCORDANCE WITH GUIDELINES ESTABLISHED IN BEST MANAGEMENT PRACTICES AND IN ACCORDANCE WITH THIS EROSION CONTROL PLAN AND DETAILS IN THIS PLAN SET. THIS NETWORK IS TO BE MAINTAINED BY THE CONTRACTOR UNTIL ALL EXPOSED SLOPES HAVE AT LEAST 90% VIGOROUS PERENNIAL VEGETATIVE COVER TO PREVENT EROSION. TEMPORARY EROSION CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER PERMANENT STABILIZATION IS ATTAINED.

PRIOR TO ANY CLEARING OR GRUBBING, A CONSTRUCTION ENTRANCE/EXIT SHALL BE CONSTRUCTED AT THE INTERSECTION OF THE PROPOSED ENTRANCES AND EXISTING ROADWAY TO AVOID TRACKING OF MUD, DUST AND DEBRIS FROM THE SITE.

PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL PREPARE A DETAILED SCHEDULE AND MARKED UP PLAN INDICATING AREAS AND COMPONENTS OF THE WORK AND KEY DATES SHOWING DATES OF DISTURBANCE OF THE WORK. THE CONTRACTOR SHALL PREPARE A DETAILED SCHEDULE A PRE-CONSTRUCTION MEETING WITH THE MUNICIPAL STAFF. THREE COPIES OF THE SCHEDULE AND MARKED UP PLAN SHALL BE PROVIDED TO THE MUNICIPALITY THREE DAYS PRIOR TO THE SCHEDULED PRE-CONSTRUCTION MEETING. SPECIAL ATTENTION SHALL BE GIVEN TO THE 14 DAY LIMIT OF DISTURBANCE IN THE SCHEDULE ADDRESSING TEMPORARY AND PERMANENT VEGETATION MEASURES.

CONSTRUCTION AND POST-CONSTRUCTION PHASE

AREAS UNDERGOING ACTUAL CONSTRUCTION SHALL ONLY EXPOSE THAT AMOUNT OF MINERAL SOIL NECESSARY FOR PROGRESSIVE AND EFFICIENT CONSTRUCTION. AN AREA CONSIDERED OPEN IS ANY AREA NOT STABILIZED WITH PAVEMENT, VEGETATION, MULCHING, EROSION CONTROL MATS, RIPRAP OR GRAVEL BASE ON A ROAD, SUCH AS ACTIVE EXCAVATION AND ACTIVE GRADING. LIMIT THE EXPOSED AREA TO THOSE AREAS IN WHICH WORK IS ACTIVELY OCCURRING OR CAN BE MULCHED IN THE SAME DAY. OPEN AREAS SHALL BE ANCHORED WITH TEMPORARY EROSION CONTROL. AS SHOWN ON THE DESIGN PLANS AND AS DESCRIBED WITHIN THIS EROSION CONTROL PLAN WITHIN SEVEN (7) DAYS OF DISTURBANCE. AREAS LOCATED WITHIN 100 FEET OF STREAMS SHALL BE ANCHORED WITH TEMPORARY EROSION CONTROL WITHIN SEVEN (7) DAYS. REFER TO WINTER EROSION CONTROL NOTES FOR THE TREATMENT OF OPEN AREAS AFTER OCTOBER 1ST OF THE CONSTRUCTION YEAR.

THE CONTRACTOR MUST INSTALL ANY ADDED MEASURES WHICH MAY BE NECESSARY TO CONTROL EROSION/SEDIMENTATION FROM THE SITE DEPENDENT UPON THE ACTUAL SITE AND WEATHER CONDITIONS. CONTINUATION OF EARTHWORK OPERATIONS ON ADDITIONAL AREAS SHALL NOT BEGIN UNTIL THE EXPOSED SOIL SURFACE ON THE AREA BEING WORKED HAS BEEN STABILIZED, IN ORDER TO MINIMIZE AREAS WITHOUT EROSION CONTROL PROTECTION.

EROSION CONTROL APPLICATIONS & MEASURES  
THE PLACEMENT OF EROSION CONTROL MEASURES SHALL BE COMPLETED IN ACCORDANCE WITH GUIDELINES ESTABLISHED IN BEST MANAGEMENT PRACTICES AND IN ACCORDANCE WITH THE EROSION CONTROL PLAN AND DETAILS IN THE PLAN SET.

1. TEMPORARY MULCHING:

ALL DISTURBED AREAS SHALL BE MULCHED WITH MATERIALS SPECIFIED BELOW PRIOR TO ANY STORM EVENT. ALL DISTURBED AREAS NOT FINAL GRADED WITHIN 14 DAYS SHALL BE MULCHED. DISTURBED AREAS ADJACENT TO NATURAL RESOURCES THAT ARE NOT GRADED WITHIN SEVEN (7) DAYS SHALL BE MULCHED ALSO. AREAS WHOSE PERMANENT VEGETATION SHALL BE MULCHED IMMEDIATELY PRIOR TO ANY STORM EVENT. FOLLOWING SEEDING, EROSION CONTROL BLANKETS ARE RECOMMENDED TO BE USED AT THE BASE OF GRASSED WATERWAYS AND ON SLOPES GREATER THAN 33%. MULCH ANCHORING SHOULD BE USED ON SLOPES GREATER THAN 5% AFTER SEPTEMBER 15TH OF THE CONSTRUCTION YEAR (SEE WINTER EROSION CONTROL NOTES).  
TYPES OF MULCH:

HAY OR STRAW: SHALL BE APPLIED AT A RATE OF 75 LBS/1,000 S.F. (1.5 TONS PER ACRE).

EROSION CONTROL MIX: SHALL BE PLACED EVENLY AND MUST PROVIDE 100% SOIL COVERAGE. EROSION CONTROL MIX SHALL BE APPLIED SUCH THAT THE THICKNESS ON SLOPES 3:1 OR LESS IS 2 INCHES PLUS 1/2 INCH PER 20 FEET OF SLOPE UP TO 100 FEET. THE THICKNESS ON SLOPES BETWEEN 3:1 AND 2:1 SHALL BE 4 INCHES PLUS 1/2 INCH PER 20 FEET OF SLOPE UP TO 100 FEET. THIS SHALL NOT BE USED ON SLOPES GREATER THAN 2:1.

EROSION CONTROL BLANKET: SHALL BE INSTALLED SUCH THAT CONTINUOUS CONTACT BETWEEN THE MAT AND THE SOIL IS OBTAINED. INSTALL BLANKETS AND STAPLE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

2. SOIL STOCKPILES:

STOCKPILES OF SOIL OR SUBSOIL SHALL BE MULCHED WITH HAY OR STRAW AT A RATE OF 75 LBS/1,000 S.F. (1.5 TONS PER ACRE) OR WITH A FOUR-INCH LAYER OF LOAM. STOCKPILES SHALL BE MULCHED WITHIN 24 HOURS OF STOCKING AND RE-ESTABLISHED PRIOR TO ANY RAINFALL. ANY SOIL STOCKPILE WILL NOT BE PLACED (EVEN COVERED WITH HAY OR STRAW) WITHIN 100 FEET FROM ANY NATURAL RESOURCES. SEDIMENT BARRIERS SHALL BE INSTALLED DOWNGRADEMENT OF STOCKPILES, AND STORMWATER SHALL BE PREVENTED FROM RUNNING ONTO THE STOCKPILE.

3. NATURAL RESOURCES PROTECTION:

ANY AREAS WITHIN 100 FEET FROM ANY NATURAL RESOURCES SHALL BE MULCHED USING TEMPORARY MULCHING (AS DESCRIBED IN PART 1 OF THIS SECTION) WITHIN 7 DAYS OF EXPOSURE OR PRIOR TO ANY STORM EVENT. SEDIMENT BARRIERS (AS DESCRIBED IN PART 4 OF THIS SECTION) SHALL BE PLACED BETWEEN ANY NATURAL RESOURCE AND THE DISTURBED AREA. PROJECTS CROSSING THE NATURAL RESOURCE SHALL BE PROTECTED A MINIMUM DISTANCE OF 100 FEET ON EITHER SIDE FROM THE RESOURCE.

4. SEDIMENT BARRIERS:

PRIOR TO THE BEGINNING OF ANY CONSTRUCTION, SEDIMENT BARRIERS SHALL BE STAKED ACROSS THE SLOPE(S), ON THE CONTOUR AT OR JUST BELOW THE LIMITS OF CLEARING OR GRUBBING, AND/OR JUST ABOVE ANY ADJACENT PROPERTY LINE OR WATERCOURSE TO PROTECT AGAINST CONSTRUCTION RELATED EROSION. SEDIMENT BARRIERS SHALL BE MAINTAINED BY THE CONTRACTOR UNTIL ALL EXPOSED SLOPES HAVE AT LEAST 90% VIGOROUS PERENNIAL VEGETATIVE COVER TO PREVENT EROSION.

SILT FENCE: SHALL BE INSTALLED PER THE DETAIL ON THE PLANS. THE EFFECTIVE HEIGHT OF THE FENCE SHALL NOT EXCEED 36 INCHES. IT IS RECOMMENDED THAT SILT FENCE BE REMOVED BY CUTTING THE FENCE MATERIALS AT GROUND LEVEL SO AS TO AVOID ADDITIONAL SOIL DISTURBANCE.

HAY BALES: SHALL NOT BE INSTALLED ADJACENT TO WETLAND. INSTALL PER THE DETAIL ON THE PLANS. BALES SHALL BE WIRE-BOUND OR STRING-TIED; THESE BINDINGS MUST REMAIN PARALLEL WITH THE GROUND SURFACE DURING INSTALLATION TO PREVENT DETERIORATION OF THE BINDINGS. BALES SHALL BE INSTALLED WITHIN A MINIMUM 4 INCH DEEP TRENCH LINE WITH ENDS OF ADJACENT BALES TIGHTLY ABUTTING ONE ANOTHER.

EROSION CONTROL MIX: SHALL NOT BE USED ADJACENT TO WETLANDS. INSTALL PER THE DETAIL ON THE PLANS. THE MIX SHALL CONSIST PRIMARILY OF ORGANIC MATERIAL AND CONTAIN A WELL-GRADED Mixture OF PARTICLE SIZES AND MAY CONTAIN ROCKS LESS THAN 4 INCHES IN DIAMETER. THE MIX COMPOSITION SHALL MEET THE STANDARDS DESCRIBED WITHIN THE MDEP BEST MANAGEMENT PRACTICES. NO TRENCHING IS REQUIRED FOR INSTALLATION ON THIS BARRIER. EROSION CONTROL MIX BERMS SHALL NOT BE USED AT THE BOTTOM OF STEEP SLOPES (>8%) OR SLOPES WITH FLOWING WATER.

CONTINUOUS CONTAINED BERM: SHALL BE INSTALLED PER THE DETAIL ON THE PLANS. THIS SEDIMENT BARRIER IS EROSION CONTROL MIX PLACED WITHIN A SYNTHETIC TUBULAR NETTING AND PERFORMS AS A STURDY BARRIER THAT WORKS WELL ON HARD GROUND SUCH AS FROZEN CONDITIONS, TRAVELED AREAS OR PAVEMENT. NO TRENCHING IS REQUIRED FOR INSTALLATION OF THIS BARRIER.

5. TEMPORARY CHECK DAMS:

SHALL BE INSTALLED PER THE DETAIL ON THE PLANS. CHECK DAMS ARE TO BE PLACED WITHIN DITCHES/ SWALES AS SPECIFIED ON THE DESIGN PLANS IMMEDIATELY AFTER FINAL GRADING. CHECK DAMS SHALL BE 2 FEET HIGH. TEMPORARY CHECK DAMS MAY BE REMOVED ONLY AFTER THE ROADWAYS ARE PAVED AND THE EROSION CONTROL MIX IS ESTABLISHED AND AT LEAST 80% OF VIGOROUS PERENNIAL GROWTH. THE AREA BENEATH THE CHECK DAM MUST BE SEEDDED AND MULCHED IMMEDIATELY AFTER REMOVAL OF THE CHECK DAM.

STONE CHECK DAMS: STONE DAMS SHOULD BE CONSTRUCTED OF 2 TO 3 INCH STONE AND PLACED SUCH THAT COMPLETE COVERAGE OF THE SWALE IS OBTAINED AND THAT THE CENTER OF THE DAM IS 6 INCHES LOWER THAN THE OUTER EDGES.

HAY BALE CHECK DAMS: BALES SHALL BE WIRE-BOUND OR STRING-TIED. BALES SHALL BE INSTALLED WITHIN A MINIMUM 4 INCH DEEP TRENCH LINE WITH ENDS OF ADJACENT BALES TIGHTLY ABUTTING ONE ANOTHER. HAY BALES SHALL BE PLACED SUCH THAT COMPLETE COVERAGE OF THE SWALE IS OBTAINED AND THAT THE CENTER OF THE DAM IS 6 INCHES LOWER THAN THE OUTER EDGES.

MANUFACTURED CHECK DAMS: MANUFACTURED CHECK DAMS, AS SPECIFIED IN THE DETAIL ON THE PLANS, MAY BE USED IF AUTHORIZED BY THE PROPER LOCAL, STATE OR FEDERAL REGULATING AGENCIES. THESE UNITS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURE'S RECOMMENDATIONS.

6. STORMDRAIN INLET PROTECTION:

INLET PROTECTION SHALL BE PLACED AROUND A STORMDRAIN DROP INLET OR CURB INLET PRIOR TO PERMANENT STABILIZATION OF THE IMMEDIATE AND UPSTREAM DISTURBED AREAS. THEY SHALL BE CONSTRUCTED IN A MANNER THAT WILL FACILITATE CLEAN-OUT AND DISPOSAL OF TRAPPED SEDIMENTS AND MINIMIZE INTERFERENCE WITH CONSTRUCTION ACTIVITIES. ANY RESULTANT PONDING OF WATER FROM THE PROTECTION METHOD MUST NOT CAUSE EXCESSIVE INCONVENIENCE OR DAMAGE TO ADJACENT AREAS OR STRUCTURES.

HAY BALE DROP INLET PROTECTION: WE DO NOT RECOMMEND THE USE OF HAY BALES AS INLET PROTECTION.

CONCRETE BLOCK AND STONE INLET SEDIMENT FILTER (DROP OR CURB INLET): SHALL BE INSTALLED PER THE DETAIL ON THE PLANS. THE HEIGHT OF THE CONCRETE BLOCK BARRIER CAN VARY BUT MUST BE BETWEEN 12 AND 24 INCHES TALL. A MINIMUM OF 1 INCH CRUSHED STONE SHALL BE USED.

MANUFACTURED SEDIMENT BARRIERS AND FILTER (DROP OR CURB INLET): MANUFACTURED FILTERS, AS SPECIFIED IN THE DETAIL ON THE PLANS, MAY BE USED IF INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

7. STABILIZED CONSTRUCTION ENTRANCE/EXIT:

PRIOR TO CLEARING AND/OR GRUBBING THE SITE A STABILIZED CONSTRUCTION ENTRANCE/EXIT SHALL BE CONSTRUCTED WHEREVER TRAFFIC WILL EXIT THE CONSTRUCTION SITE ONTO A PAVED ROADWAY IN ORDER TO MINIMIZE THE TRACKING OF SEDIMENT AND DEBRIS FROM THE CONSTRUCTION SITE ONTO PUBLIC ROADWAYS. THE ENTRANCES AND ADJACENT ROADWAY AREAS SHALL BE PERIODICALLY SWEEP TO FURTHER MINIMIZE THE TRACKING OF MUD, DUST OR DEBRIS FROM THE CONSTRUCTION AREA. THE TERM "SWEEP" IS UNDERSTOOD TO MEAN REMOVAL AND RECOVERY OF TRACKED SEDIMENT WITH A STREET SWEEPER, NOT BRUSHING THE MATERIAL INTO SWALES OR STRUCTURES WITH A MECHANICAL BROOM. STABILIZED CONSTRUCTION EXITS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE PLANS AND AS DESCRIBED ON THE PLANS. THE CONTRACTOR SHALL MAINTAIN THE STABILIZED CONSTRUCTION ENTRANCE UNTIL ALL DISTURBED AREAS ARE STABILIZED.

DUST CONTROL:

DUST CONTROL DURING CONSTRUCTION SHALL BE ACHIEVED BY THE USE OF A WATERING TRUCK TO PERIODICALLY SPRINKLE THE EXPOSED ROADWAY AREAS AS NECESSARY TO REDUCE DUST DURING THE DRY MONTHS. APPLYING OTHER DUST CONTROL PRODUCTS SUCH AS CALCIUM CHLORIDE OR OTHER MANUFACTURED PRODUCTS ARE ALLOWED IF AUTHORIZED BY THE PROPER LOCAL, STATE AND/OR FEDERAL REGULATING AGENCIES. HOWEVER, IT IS THE CONTRACTOR'S ULTIMATE RESPONSIBILITY TO MITIGATE DUST AND SOIL LOSS FROM THE SITE. IF OFF-SITE TRACKING OCCURS, PUBLIC ROADS SHOULD BE SWEEP IMMEDIATELY AND NOT LESS THAN ONCE A WEEK AND PRIOR TO SIGNIFICANT STORM EVENTS.

TEMPORARY VEGETATION:

TEMPORARY VEGETATION SHALL BE APPLIED TO DISTURBED AREAS THAT WILL NOT RECEIVE FINAL GRADING FOR PERIODS UP TO 12 MONTHS. THIS PROCEDURE SHOULD BE USED EXTENSIVELY IN AREAS ADJACENT TO NATURAL RESOURCES. SEEDBED PREPARATION AND APPLICATION OF SEED SHALL BE CONDUCTED AS INDICATED IN THE PERMANENT VEGETATION SECTION OF THIS NARRATIVE. SPECIFIC SEEDS (FAST GROWING AND SHORT LIVING) SHALL BE SELECTED FROM THE MAINE EROSION AND SEDIMENT CONTROL BMP MANUALS FOR CONTRACTORS AND ENGINEERS, LATEST EDITION. ALTERNATIVE EROSION CONTROL MEASURES SHOULD BE USED IF SEEDING CAN NOT BE DONE BEFORE SEPTEMBER 15TH OF THE CONSTRUCTION YEAR.

PERMANENT VEGETATION:

REVEGETATION MEASURES SHALL COMMENCE IMMEDIATELY UPON COMPLETION OF FINAL GRADING OF AREAS TO BE LOAMED AND SEEDDED. THE APPLICATION OF SEED SHALL BE CONDUCTED BETWEEN APRIL 1ST AND OCTOBER 1ST OF THE CONSTRUCTION YEAR. PLEASE REFER TO THE WINTER EROSION CONTROL NOTES FOR MORE DETAIL. REVEGETATION MEASURES SHALL CONSIST OF THE FOLLOWING:

SEEDBED PREPARATION:

A. FOUR (4) INCHES OF LOAM SHALL BE SPREAD OVER DISTURBED AREAS AND SMOOTHED TO A UNIFORM SURFACE. LOAM SHALL BE FREE OF SUBSOIL, CLAY LUMPS, STONES AND OTHER OBJECTS OVER 2 INCHES OR LARGER IN ANY DIMENSION, AND WITHOUT WEEDS, ROOTS OR OTHER OBJECTIONABLE MATERIAL.

B. SOILS TESTS SHALL BE TAKEN AT THE TIME OF SOIL STRIPPING TO DETERMINE FERTILIZATION REQUIREMENTS. SOILS TESTS SHALL BE TAKEN PROMPTLY AS TO NOT INTERFERE WITH THE 14-DAY LIMIT ON SOIL EXPOSURE. BASED UPON TEST RESULTS, SOIL AMENDMENTS SHALL BE INCORPORATED INTO THE SOIL PRIOR TO FINAL SEEDING. IN LIEU OF SOIL TESTS, SOIL AMENDMENTS MAY BE APPLIED AS FOLLOWS:

ITEM	APPLICATION RATE
10-20-20 FERTILIZER (N-P205-K20 OR EQUAL)	18.4 LBS/1,000 S.F.
GROUND LIMESTONE (50% CALCIUM & MAGNESIUM OXIDE)	138 LBS/1,000 S.F.

C. WORK LIME AND FERTILIZER INTO THE SOIL AS NEARLY AS PRACTICAL TO A DEPTH OF 4 INCHES WITH PROPER EQUIPMENT. ROLL THE AREA TO FIRM THE SEEDBED EXCEPT ON CLAY OR SILTY SOILS OR COARSE SAND.

APPLICATION OF SEED:

A. SEEDING: SHALL BE CONDUCTED BETWEEN APRIL 1ST AND OCTOBER 1ST OF THE CONSTRUCTION YEAR. GENERALLY A SEED MIXTURE MAY BE APPLIED AS FOLLOWS: (CONSERVATION MIX)

SEED TYPE	APPLICATION RATE
FESCUE, TAWN	0.34 LBS/1,000 S.F. (15 LBS/ACRE)
BIRD'S FOOT TREFOIL, VARIETY NOT STATED	0.28 LBS/1,000 S.F. (12 LBS/ACRE)
ANNUAL RYEGRASS	0.18 LBS/1,000 S.F. (8 LBS/ACRE)
TIMOTHY, CLIMAX	0.18 LBS/1,000 S.F. (8 LBS/ACRE)
ALSIKE CLOVER	0.11 LBS/1,000 S.F. (6 LBS/ACRE)
REDTOP	0.05 LBS/1,000 S.F. (2 LBS/ACRE)
TOTAL	1.14 LBS/1,000 S.F. (50 LBS/ACRE)

NOTE: A SPECIFIC SEED MIXTURE SHOULD BE CHOSEN TO MATCH THE SOILS CONDITION OF THE SITE. VARIOUS AGENCIES CAN RECOMMEND SEED MIXTURES. MDEP RECOMMENDED SEED MIXTURES ARE IN THE EROSION AND SEDIMENT CONTROL BMP MANUAL DATED 2016 OR LATEST REVISION.

B. HYDROSEEDING: SHALL BE CONDUCTED ON PREPARED AREAS WITH SLOPES LESS THAN 2:1. LIME AND FERTILIZER MAY BE APPLIED SIMULTANEOUSLY WITH THE SEED. RECOMMENDED SEEDING RATES MUST BE INCREASED BY 10% WHEN HYDROSEEDING.

C. MULCHING: SHALL COMMENCE IMMEDIATELY AFTER SEED IS APPLIED. REFER TO THE TEMPORARY MULCHING SECTION OF THIS NARRATIVE FOR DETAILS.

SODDING:

FOLLOWING SEEDBED PREPARATION, SOD CAN BE APPLIED IN LIEU OF SEEDING IN AREAS WHERE IMMEDIATE VEGETATION IS MOST BENEFICIAL, SUCH AS DITCHES, AROUND STORMWATER DROP INLETS AND AREAS OF AESTHETIC VALUE. SOD SHOULD BE LAID AT RIGHT ANGLES TO THE DIRECTION OF FLOW, STARTING AT THE LOWEST ELEVATION. SOD SHOULD BE ROLLED OR TAMPED DOWN TO EVEN OUT THE JOINTS ONCE LAID DOWN, WHERE FLOW IS PREVALENT THE SOD MUST BE PROPERLY ANCHORED DOWN. IRRIGATE THE SOD IMMEDIATELY AFTER INSTALLATION. IN MOST CASES, SOD CAN BE ESTABLISHED BETWEEN APRIL 1ST AND NOVEMBER 15TH OF THE CONSTRUCTION YEAR, HOWEVER, REFER TO THE WINTER EROSION CONTROL NOTES FOR ANY ACTIVITIES AFTER OCTOBER 1ST.

STANDARDS FOR TIMELY STABILIZATION:

STANDARD FOR THE TIMELY STABILIZATION OF DISTURBED SLOPES -- THE CONTRACTOR WILL CONSTRUCT AND STABILIZE STONE-COVERED SLOPES BY NOVEMBER 15. THE CONTRACTOR WILL SEED AND MULCH ALL SLOPES TO BE VEGETATED BY SEPTEMBER 15. THE MDEP WILL CONSIDER ANY AREA HAVING A GRADE GREATER THAN 15% (10H:1V) TO BE A SLOPE. IF THE CONTRACTOR FAILS TO STABILIZE ANY SLOPE TO BE VEGETATED BY SEPTEMBER 15, THEN THE CONTRACTOR WILL TAKE ONE OF THE FOLLOWING ACTIONS TO STABILIZE THE SLOPE FOR LATE FALL AND WINTER.

- STABILIZE THE SOIL WITH TEMPORARY VEGETATION AND EROSION CONTROL MATS -- BY OCTOBER 1 THE CONTRACTOR WILL SEED THE DISTURBED SLOPE WITH WINTER RYE AT A SEEDING RATE OF 3 POUNDS PER 1,000 SQUARE FEET AND APPLY EROSION CONTROL MATS OVER THE MULCHED SLOPE. THE CONTRACTOR WILL MONITOR GROWTH OF THE RYE OVER THE NEXT 30 DAYS. IF THE RYE FAILS TO GROW AT LEAST THREE INCHES OR COVER AT LEAST 75% OF THE DISTURBED SLOPE BY NOVEMBER 15, THEN THE APPLICANT WILL COVER THE SLOPE WITH A LAYER OF WOOD WASTE COMPOST AS DESCRIBED IN ITEM 2(C) OF THIS STANDARD OR WITH STONE RIPRAP AS DESCRIBED IN ITEM 2(D) OF THIS STANDARD.
- STABILIZE THE SLOPE WITH SOD -- THE CONTRACTOR WILL STABILIZE THE DISTURBED SLOPE WITH PROPERLY INSTALLED SOD BY OCTOBER 1. PROPER INSTALLATION INCLUDES THE APPLICANT PINNING THE SOD ONTO THE SLOPE WITH WIRE PINS, ROLLING THE SOD TO GUARANTEE CONTACT BETWEEN THE SOD AND UNDERLYING SOIL, AND WATERING THE SOD TO PROMOTE ROOT GROWTH INTO THE DISTURBED SOIL. THE APPLICANT WILL NOT USE LATE-SEASON SOD INSTALLATION TO STABILIZE SLOPES HAVING A GRADE GREATER THAN 33% (3H:1V).
- STABILIZE THE SLOPE WITH WOOD WASTE COMPOST -- THE CONTRACTOR WILL PLACE A SIX-INCH LAYER OF WOOD WASTE COMPOST ON THE SLOPE BY NOVEMBER 15. PRIOR TO PLACING THE WOOD WASTE COMPOST, THE APPLICANT WILL REMOVE ANY SNOW ACCUMULATION ON THE DISTURBED SLOPE. THE APPLICANT WILL NOT USE WOOD WASTE COMPOST TO STABILIZE SLOPES HAVING GRADES GREATER THAN 50% (2H:1V) OR HAVING GROUNDWATER SEEPS ON THE SLOPE FACE.
- STABILIZE THE SLOPE WITH STONE RIPRAP -- THE CONTRACTOR WILL PLACE A LAYER OF STONE RIPRAP ON THE SLOPE BY NOVEMBER 15. THE APPLICANT WILL HIRE A REGISTERED PROFESSIONAL ENGINEER TO DETERMINE THE STONE SIZE NEEDED FOR STABILITY AND TO DESIGN A FILTER LAYER FOR UNDERNEATH THE RIPRAP.

STANDARD FOR THE TIMELY STABILIZATION OF DISTURBED SOILS -- BY SEPTEMBER 15 THE CONTRACTOR WILL SEED AND MULCH ALL DISTURBED SOILS ON AREAS HAVING A SLOPE LESS THAN 15%. IF THE CONTRACTOR FAILS TO STABILIZE THESE SOILS BY THIS DATE, THEN THE CONTRACTOR WILL TAKE ONE OF THE FOLLOWING ACTIONS TO STABILIZE THE SOIL FOR LATE FALL AND WINTER.

- STABILIZE THE SOIL WITH TEMPORARY VEGETATION -- BY OCTOBER 1 THE CONTRACTOR WILL SEED THE DISTURBED SOIL WITH WINTER RYE AT A SEEDING RATE OF 3 POUNDS PER 1,000 SQUARE FEET, LIGHTLY MULCH THE SEEDDED SOIL WITH HAY OR STRAW AT 75 POUNDS PER 1,000 SQUARE FEET, AND ANCHOR THE MULCH WITH PLASTIC NETTING. THE APPLICANT WILL MONITOR GROWTH OF THE RYE OVER THE NEXT 30 DAYS. IF THE RYE FAILS TO GROW AT LEAST THREE INCHES OR COVER AT LEAST 75% OF THE DISTURBED SOIL BEFORE NOVEMBER 15, THEN THE APPLICANT WILL MULCH THE AREA FOR OVER-WINTER PROTECTION AS DESCRIBED IN ITEM 3(C) OF THIS STANDARD.
- STABILIZE THE SOIL WITH SOD -- THE APPLICANT WILL STABILIZE THE DISTURBED SOIL WITH PROPERLY INSTALLED SOD BY OCTOBER 1. PROPER INSTALLATION INCLUDES THE APPLICANT PINNING THE SOD ONTO THE SOIL WITH WIRE PINS, ROLLING THE SOD TO GUARANTEE CONTACT BETWEEN THE SOD AND UNDERLYING SOIL, AND WATERING THE SOD TO PROMOTE ROOT GROWTH INTO THE DISTURBED SOIL.
- STABILIZE THE SOIL WITH MULCH -- BY NOVEMBER 15 THE APPLICANT WILL MULCH THE DISTURBED SOIL BY SPREADING HAY OR STRAW AT A RATE OF AT LEAST 150 POUNDS PER 1,000 SQUARE FEET ON THE AREA SO THAT NO SOIL IS VISIBLE THROUGH THE MULCH. PRIOR TO APPLYING THE MULCH, THE APPLICANT WILL REMOVE ANY SNOW ACCUMULATION ON THE DISTURBED AREA. IMMEDIATELY AFTER APPLYING THE MULCH, THE APPLICANT WILL ANCHOR THE MULCH WITH PLASTIC NETTING TO PREVENT WIND FROM MOVING THE MULCH OFF THE DISTURBED SOIL.

- MAINTENANCE MEASURES SHALL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION CYCLE. AFTER EACH RAINFALL, SNOW STORM OR PERIOD OF THAWING AND RUNOFF, AND AT LEAST EVERY SEVEN (7) DAYS, THE CONTRACTOR SHALL PERFORM A VISUAL INSPECTION OF ALL INSTALLED EROSION CONTROL MEASURES. THE CONTRACTOR SHALL PERFORM REPAIRS NO LATER THAN THE END OF THE NEXT WORKDAY, TO ALLOW CONTINUED PROPER FUNCTIONING OF THE EROSION CONTROL MEASURE. THE CONTRACTOR SHALL PROVIDE THE NECESSARY REGULATING AGENCIES WITH WRITTEN DOCUMENTATION DESCRIBING DATES OF INSPECTIONS AND NECESSARY FOLLOW-UP WORK TO MAINTAIN EROSION CONTROL MEASURES MEETING THE REQUIREMENTS OF THIS PLAN WITHIN SEVEN (7) DAYS.
- FOLLOWING THE TEMPORARY AND/OR FINAL SEEDINGS, THE CONTRACTOR SHALL INSPECT THE WORK AREA SEMIMONTHLY UNTIL THE SEEDINGS HAVE BEEN ESTABLISHED. ESTABLISHED MEANS A MINIMUM OF 90% OF AREAS VEGETATED WITH VIGOROUS GROWTH. RESEEDING SHALL BE CARRIED OUT BY THE CONTRACTOR WITH FOLLOW-UP INSPECTIONS IN THE EVENT OF ANY FAILURES UNTIL VEGETATION IS ADEQUATELY ESTABLISHED.

HOUSEKEEPING:

1. SPILL PREVENTION: CONTROLS MUST BE USED TO PREVENT POLLUTANTS FROM CONSTRUCTION AND WASTE MATERIALS STORED ON SITE TO ENTER STORMWATER, WHICH INCLUDES STORAGE PRACTICES TO MINIMIZE EXPOSURE OF THE MATERIALS TO STORMWATER, THE SITE CONTRACTOR OR OPERATOR MUST DEVELOP, AND IMPLEMENT AS NECESSARY, APPROPRIATE SPILL PREVENTION, CONTAINMENT, AND RESPONSE PLANNING MEASURES.

2. GROUNDWATER PROTECTION: DURING CONSTRUCTION, LIQUID PETROLEUM PRODUCTS AND OTHER HAZARDOUS MATERIALS WITH THE POTENTIAL TO CONTAMINATE GROUNDWATER MAY NOT BE STORED OR HANDLED IN AREAS OF THE SITE DRAINING TO AN INFILTRATION AREA. AN "INFILTRATION AREA" IS ANY AREA OF THE SITE THAT BY DESIGN OR AS A RESULT OF ANY OTHER RELEVANT FACTORS ACCUMULATES OR MAY CAUSE WATER TO INFILTRATE INTO THE SOIL, DIKES, BERMS, BUMPS, AND OTHER FORMS OF SECONDARY CONTAINMENT THAT PREVENT DISCHARGE TO GROUNDWATER MAY BE USED TO ISOLATE PORTIONS OF THE SITE FOR THE PURPOSES OF STORAGE AND HANDLING OF THESE MATERIALS. ANY PROJECT PROPOSING INFILTRATION OF STORMWATER MUST PROVIDE ADEQUATE PRE-TREATMENT OF STORMWATER PRIOR TO DISCHARGE OF STORMWATER TO THE INFILTRATION AREA, OR PROVIDE FOR TREATMENT WITHIN THE INFILTRATION AREA, IN ORDER TO PREVENT THE ACCUMULATION OF FINES, REDUCTION IN INFILTRATION RATE, AND CONSEQUENT FLOODING AND DESTABILIZATION.

3. FUGITIVE SEDIMENT AND DUST: ACTIONS MUST BE TAKEN TO ENSURE THAT ACTIVITIES DO NOT RESULT IN NOTICEABLE EROSION OF SOILS OR FUGITIVE DUST EMISSIONS DURING OR AFTER CONSTRUCTION. DUST SUPPRESSION MEASURES SHALL BE USED TO PREVENT DUST FROM ENTERING THE CONSTRUCTION ENTRANCE (SCE) SHOULD BE INCLUDED TO MINIMIZE TRACKING OF MUD AND SEDIMENT. IF OFF-SITE TRACKING OCCURS, PUBLIC ROADS SHOULD BE SWEEP IMMEDIATELY AND NOT LESS THAN ONCE A WEEK AND PRIOR TO SIGNIFICANT STORM EVENTS. OPERATIONS DURING DRY MONTHS, THAT EXPERIENCE FUGITIVE DUST PROBLEMS, SHOULD WET DOWN UNPAVED ACCESS ROADS ONCE A WEEK OR MORE FREQUENTLY AS NEEDED WITH A WATER ADDITIVE TO SUPPRESS FUGITIVE SEDIMENT AND DUST.

4. DEBRIS AND OTHER MATERIALS: MINIMIZE THE EXPOSURE OF CONSTRUCTION DEBRIS, BUILDING AND LANDSCAPING MATERIALS, TRASH, FERTILIZERS, PESTICIDES, HERBICIDES, DETERGENTS, SANITARY WASTE AND OTHER MATERIALS TO PRECIPITATION AND STORMWATER RUNOFF. THESE MATERIALS MUST BE PREVENTED FROM BECOMING A POLLUTANT SOURCE.

5. EXCAVATION DE-WATERING: EXCAVATION DE-WATERING IS THE REMOVAL OF WATER FROM TRENCHES, FOUNDATIONS, COFFER DAMS, PONDS, AND OTHER AREAS WITHIN THE CONSTRUCTION AREA THAT RETAIN WATER AFTER EXCAVATION. IN MOST CASES THE COLLECTED WATER IS HEAVILY SILTED AND HINDERS CORRECT AND SAFE CONSTRUCTION PRACTICES. THE COLLECTED WATER REMOVED FROM THE PONDING AREA, EITHER THROUGH GRAVITY OR PUMPING, MUST BE SPREAD THROUGH NATURAL WOODED BUFFERS OR REMOVED TO AREAS THAT ARE SPECIFICALLY DESIGNED TO COLLECT THE MAXIMUM AMOUNT OF SEDIMENT POSSIBLE, LIKE A COFFERDAM SEDIMENTATION BASIN. AVOID ALLOWING THE WATER TO FLOW OVER DISTURBED AREAS OF THE SITE. EQUIVALENT MEASURES MAY BE TAKEN IF APPROVED BY THE DEPARTMENT.

6. AUTHORIZED NON-STORMWATER DISCHARGES: IDENTIFY AND PREVENT CONTAMINATION BY NON-STORMWATER DISCHARGES, WHERE ALLOWED NON-STORMWATER DISCHARGES EXIST. THEY MUST BE IDENTIFIED AND STEPS SHOULD BE TAKEN TO ENSURE THE IMPLEMENTATION OF APPROPRIATE POLLUTION PREVENTION MEASURES FOR THE NON-STORMWATER COMPONENT(S) OF THE DISCHARGE. AUTHORIZED NON-STORMWATER DISCHARGES ARE:

- DISCHARGES FROM FIREFIGHTING ACTIVITY,
- FIRE HYDRANT FLUSHINGS,
- VEHICLE WASHWATER IF DETERGENTS ARE NOT USED AND WASHING IS LIMITED TO THE EXTERIOR OF VEHICLES (ENGINE, UNDERCARRIAGE AND TRANSMISSION WASHING IS PROHIBITED),
- DUST CONTROL RUNOFF IN ACCORDANCE WITH PERMIT CONDITIONS,
- ROUTINE EXTERNAL BUILDING WASHDOWN, NOT INCLUDING SURFACE PAINT REMOVAL, THAT DOES NOT INVOLVE DETERGENTS,
- PAVEMENT WASHWATER (WHERE SPILLS/LEAKS OF TOXIC OR HAZARDOUS MATERIALS HAVE NOT OCCURRED, UNLESS ALL SPILLED MATERIAL HAD BEEN REMOVED) IF DETERGENTS ARE NOT USED,
- UNCONTAMINATED AIR CONDITIONING OR COMPRESSOR CONDENSATE,
- UNCONTAMINATED GROUNDWATER OR SPRING WATER,
- FOUNDATION OR FOOTER DRAIN-WATER WHERE FLOWS ARE NOT CONTAMINATED,
- UNCONTAMINATED EXCAVATION DEWATERING,
- POTABLE WATER SOURCES INCLUDING WATERLINE FLUSHINGS, AND
- LANDSCAPE IRRIGATION.

7. UNAUTHORIZED NON-STORMWATER DISCHARGES: THE DEPARTMENT'S APPROVAL DOES NOT AUTHORIZE A DISCHARGE THAT IS MIXED WITH A SOURCE OF NON-STORMWATER, OTHER THAN THOSE DISCHARGES. SPECIFICALLY, THE DEPARTMENT'S APPROVAL DOES NOT AUTHORIZE DISCHARGES OF THE FOLLOWING:

- WASTEWATER FROM THE WASHOUT OR CLEAN OUT OF CONCRETE, STUCCO, PAINT, FORM RELEASE OILS, CURING COMPOUNDS OR OTHER CONSTRUCTION MATERIALS;
- FUELS, OILS OR OTHER POLLUTANTS USED IN VEHICLE AND EQUIPMENT OPERATION AND MAINTENANCE;
- SOAPS, SOLVENTS, OR DETERGENTS USED IN VEHICLE AND EQUIPMENT WASHING, AND
- TOXIC OR HAZARDOUS SUBSTANCES FROM A SPILL OR OTHER RELEASE.

WINTER EROSION CONTROL MEASURES

THE WINTER CONSTRUCTION PERIOD IS FROM NOVEMBER 1 THROUGH APRIL 15. IF THE CONSTRUCTION SITE IS NOT STABILIZED WITH PAVEMENT, A ROAD GRAVEL BASE, 75% MATURE VEGETATION COVER OR RIPRAP BY NOVEMBER 1 THEN THE SITE NEEDS TO BE PROTECTED WITH OVER-WINTER STABILIZATION. AN AREA CONSIDERED OPEN IS ANY AREA NOT STABILIZED WITH PAVEMENT, VEGETATION, MULCHING, EROSION CONTROL MATS, RIPRAP OR GRAVEL BASE ON A ROAD. LIMIT THE EXPOSED AREA TO THOSE AREAS IN WHICH WORK IS EXPECTED TO BE UNDER TAKEN DURING THE PROCEEDING 15 DAYS AND THAT CAN BE MULCHED IN ORDER TO PREPARE TO ANY SNOW EVENT. ALL AREAS SHALL BE CONSIDERED TO BE DENIED UNTIL THE SUBBASE GRAVEL IS INSTALLED IN ROADWAY AREAS OR THE AREAS OF FUTURE LOAM AND SEED HAVE BEEN LOAMED, SEEDDED AND MULCHED. HAY AND STRAW MULCH RATE SHALL BE A MINIMUM OF 150 LBS/1,000 S.F. (3 TONS/ACRE) AND SHALL BE PROPERLY ANCHORED. THE CONTRACTOR MUST INSTALL ANY ADDED MEASURES WHICH MAY BE NECESSARY TO CONTROL EROSION/SEDIMENTATION FROM THE SITE DEPENDENT UPON THE ACTUAL SITE AND WEATHER CONDITIONS. CONTINUATION OF EARTHWORK OPERATIONS ON ADDITIONAL AREAS SHALL NOT BEGIN UNTIL THE EXPOSED SOIL SURFACE ON THE AREA BEING WORKED HAS BEEN STABILIZED, IN ORDER TO MINIMIZE AREAS WITHOUT EROSION CONTROL PROTECTION.

1. SOIL STOCKPILES

STOCKPILES OF SOIL OR SUBSOIL WILL BE MULCHED FOR OVER WINTER PROTECTION WITH HAY OR STRAW AT TWICE THE NORMAL RATE OR AT 150 LBS/1,000 S.F. (3 TONS PER ACRE) OR WITH A FOUR-INCH LAYER OF WOOD WASTE EROSION CONTROL MIX. THIS WILL BE DONE WITHIN 24 HOURS OF STOCKING AND RE-ESTABLISHED PRIOR TO ANY RAINFALL OR SNOWFALL. ANY SOIL STOCKPILE WILL NOT BE PLACED (EVEN COVERED WITH HAY OR STRAW) WITHIN 100 FEET FROM ANY NATURAL RESOURCES.

2. NATURAL RESOURCES PROTECTION

ANY AREAS WITHIN 100 FEET FROM ANY NATURAL RESOURCES, IF NOT STABILIZED WITH A MINIMUM OF 75% MATURE VEGETATION CATCH, SHALL BE MULCHED BY DECEMBER 1 AND ANCHORED WITH PLASTIC NETTING OR PROTECTED WITH EROSION CONTROL MATS. DURING WINTER CONSTRUCTION, A DOUBLE LINE OF SEDIMENT BARRIERS (I.E. SILT FENCE BACKED WITH HAY BALES OR EROSION CONTROL MIX) WILL BE PLACED BETWEEN ANY NATURAL RESOURCE AND THE DISTURBED AREA.

PROJECTS CROSSING THE NATURAL RESOURCE SHALL BE PROTECTED A MINIMUM DISTANCE OF 100 FEET ON EITHER SIDE FROM THE RESOURCE. EXISTING PROJECTS NOT STABILIZED BY DECEMBER 1 SHALL BE PROTECTED WITH THE SECOND LINE OF SEDIMENT BARRIER TO ENSURE FUNCTIONALITY DURING THE SPRING THAW AND RAINS.

3. SEDIMENT BARRIERS

DURING FROZEN CONDITIONS, SEDIMENT BARRIERS SHALL CONSIST OF WOOD WASTE FILTER BERMS AS FROZEN SOIL PREVENTS THE PROPER INSTALLATION OF HAY BALES AND SEDIMENT SILT FENCES.

4. MULCHING

ALL AREA SHALL BE CONSIDERED TO BE DENIED UNTIL AREAS OF FUTURE LOAM AND SEED HAVE BEEN LOAMED, SEEDDED AND MULCHED. HAY AND STRAW MULCH SHOULD BE APPLIED AT A RATE OF 150 LB. PER 1,000 SQUARE FEET OR 3 TONS/ACRE (TWICE THE NORMAL ACCEPTED RATE OF 75-LBS./1,000 S.F. OR 1.5 TONS/ACRE) AND SHALL BE PROPERLY ANCHORED. MULCH SHALL NOT BE SPREAD ON TOP OF SNOW. THE SNOW WILL BE REMOVED DOWN TO A ONE-INCH DEPTH OR LESS PRIOR TO APPLICATION. AFTER EACH DAY OF FINAL GRADING, THE AREA WILL BE PROPERLY STABILIZED WITH ANCHORED HAY OR STRAW OR EROSION CONTROL MATTING. AN AREA SHALL BE CONSIDERED TO HAVE BEEN STABILIZED WHEN EXPOSED SURFACES HAVE BEEN EITHER MULCHED WITH STRAW OR HAY AT A RATE OF 150 LB. PER 1,000 SQUARE FEET (3 TONS/ACRE) AND ADEQUATELY ANCHORED THAT GROUND SURFACE IS NOT VISIBLE THOUGH THE MULCH.

BETWEEN THE DATES OF SEPTEMBER 1 AND APRIL 15, ALL MULCH SHALL BE ANCHORED BY EITHER PEG LINE, MULCH NETTING, ASPHALT EMULSION CHEMICAL, TRACK OR TEMPORARY CELLULOSE OR SURFACES IS NOT VISIBLE THROUGH THE MULCH THEN COVER IS SUFFICIENT. AFTER NOVEMBER 1ST, MULCH AND ANCHORING OF ALL BARE SOIL SHALL OCCUR AT THE END OF EACH FINAL GRADING WORK DAY.


5. MULCHING ON SLOPES AND DITCHES

SLOPES SHALL NOT BE LEFT EXPOSED FOR ANY EXTENDED TIME OF WORK SUSPENSION UNLESS FULLY MULCHED AND ANCHORED WITH PEG AND NETTING OR WITH EROSION CONTROL BLANKETS. MULCHING SHALL BE APPLIED AT A RATE OF 230 LBS/1,000 S.F. ON ALL SLOPES GREATER THAN 8%. MULCH NETTING SHALL BE USED TO ANCHOR MULCH IN ALL CIRCULAR DRAINAGE WAYS WITH SLOPES GREATER THAN 5% OR GREATER THAN 5% OF SLOPES EXPOSED TO FUTURE EROSION. EROSION CONTROL BLANKETS SHALL BE USED IN LIEU OF MULCH IN ALL DRAINAGE WAYS WITH SLOPES 8%. EROSION CONTROL MIX CAN BE USED TO SUBSTITUTE EROSION CONTROL BLANKETS ON ALL SLOPES EXCEPT DITCHES.

6. SEEDING


BETWEEN THE DATES OF OCTOBER 15 AND APRIL 1ST, LOAM OR SEED WILL NOT BE REQUIRED. DURING PERIODS OF ABOVE FREEZING TEMPERATURES FINISHED AREAS SHALL BE RE-GRASSED TO FINAL PERMANENT CONDITION. SEEDING SHALL BE COMPLETED BY SEPTEMBER 15. IF THE DATE IS AFTER NOVEMBER 1ST AND IF THE EXPOSED AREA HAS BEEN LOAMED, FINAL GRADED WITH A UNIFORM SURFACE, THEN THE AREA MAY BE DORMANT SEEDDED AT A RATE OF 3 TIMES HIGHER THAN SPECIFIED FOR PERMANENT SEED AND THEN MULCHED. DORMANT SEEDING MAY BE SELECTED TO BE PLACED PRIOR TO THE PLACEMENT OF MULCH AND FABRIC NETTING ANCHORED WITH STAPLES. IF DORMANT SEEDING IS USED FOR THE SITE, ALL DISTURBED AREAS SHALL RECEIVE 4' OF LOAM AND SEED AT AN APPLICATION RATE OF 8LBS/1,000 S.F. ALL AREAS SEEDD DURING THE SPRING SHOULD BE REVEGETATED WITHIN THE SPRING. ALL AREAS SUFFICIENTLY VEGETATED (LESS THAN 75% CATCH) SHALL BE REVEGETATED BY REPLACING LOAM, SEED AND MULCH. IF DORMANT SEEDING IS NOT USED FOR THE SITE, ALL DISTURBED AREAS SHALL BE REVEGETATED IN THE SPRING. SEED TYPE SHALL BE WINTER RYE.



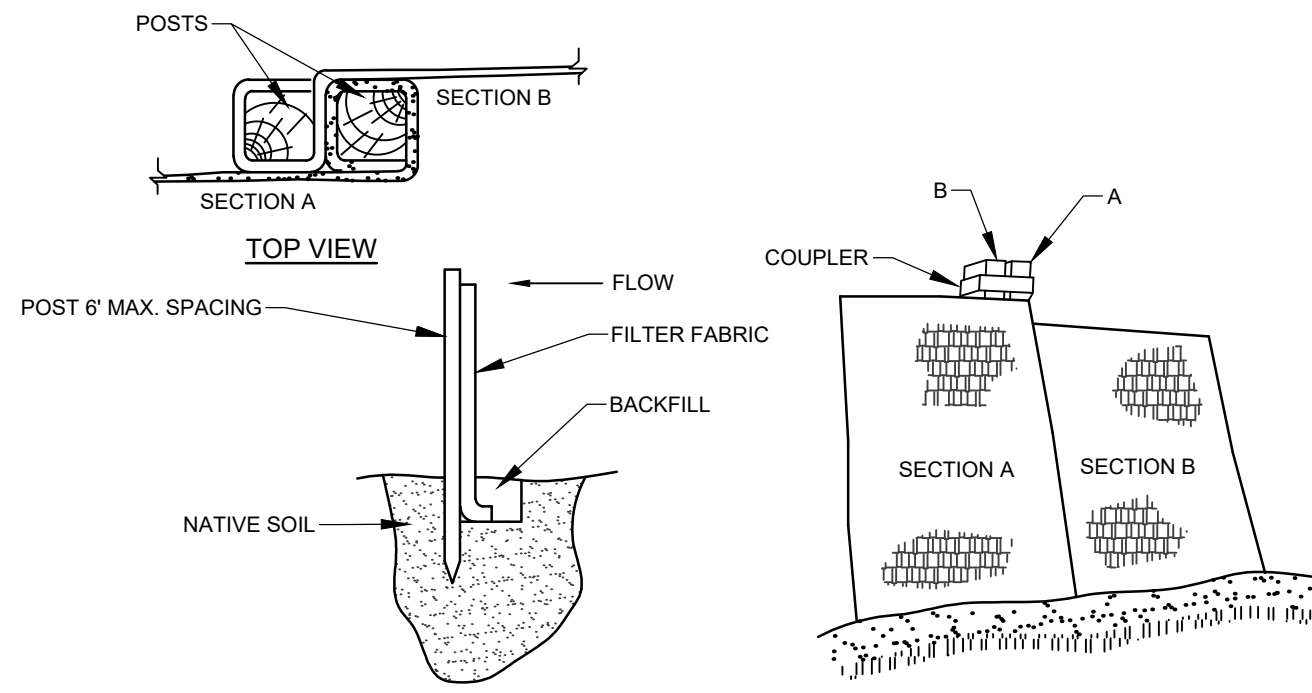


- INSTALLATION:**
1. EXCAVATE A 6"x 6" TRENCH ALONG THE LINE OF PLACEMENT FOR THE FILTER BARRIER.
  2. UNROLL A SECTION AT A TIME AND POSITION THE POSTS AGAINST THE BACK (DOWNSTREAM) WALL OF THE TRENCH.
  3. DRIVE POSTS INTO THE GROUND UNTIL APPROXIMATELY 2" OF FABRIC IS LYING ON THE TRENCH BOTTOM.
  4. LAY THE TOE-IN FLAP OF FABRIC ONTO THE UNDISTURBED BOTTOM OF THE TRENCH. BACKFILL THE TRENCH AND TAMP THE SOIL. TOE-IN CAN ALSO BE ACCOMPLISHED BY LAYING THE FABRIC FLAP ON UNDISTURBED GROUND AND PILING AND TAMPING FILL AT THE BASE, BUT MUST BE ACCOMPANIED BY AN INTERCEPTION DITCH.
  5. JOIN SECTION AS SHOWN ABOVE.
  6. BARRIER SHALL BE MIRAFI SILT FENCE OR EQUAL.


**FILTER BARRIER**  
NOT TO SCALE

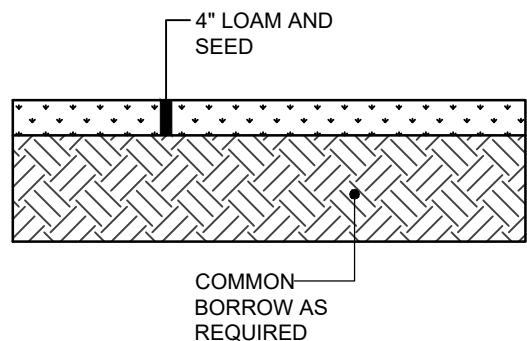

**LOAM & SEED SECTION**  
NOT TO SCALE

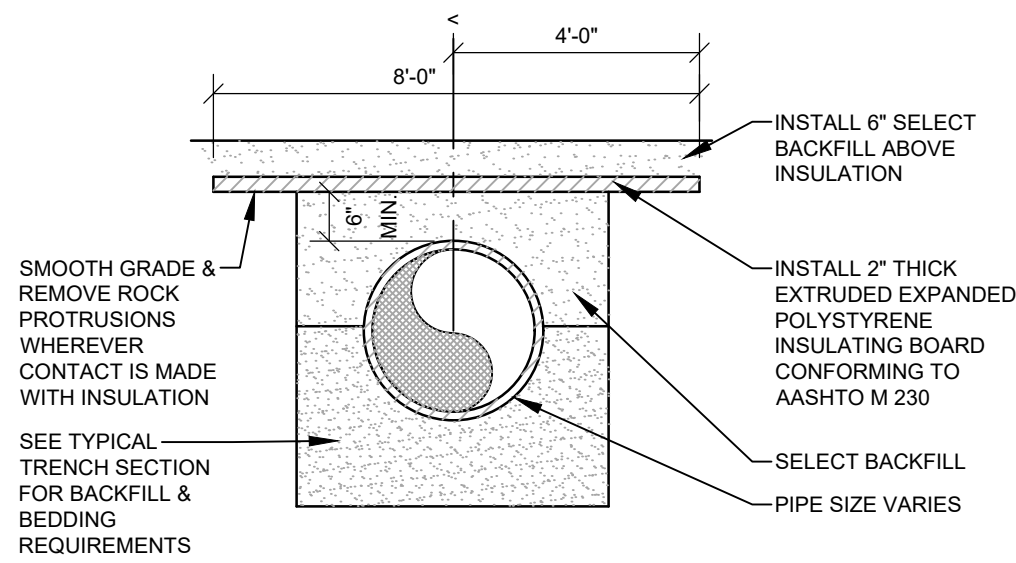


**PIPE INSULATION DETAIL**  
NOT TO SCALE

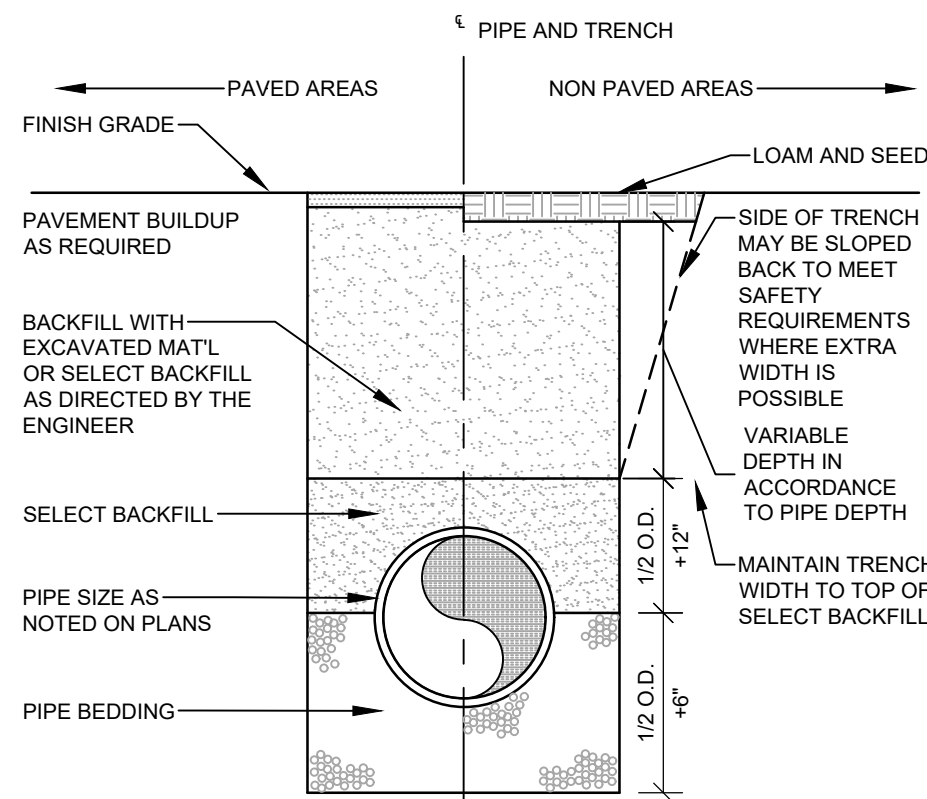

TRENCH BACKFILL SCHEDULE		
PIPE TYPE	PIPE BEDDING MATERIAL	SELECT BACKFILL
CORRUGATED METAL DUCTILE IRON REINFORCED CONCRETE	MDOT 703.22 TYPE B UD BACKFILL	MDOT 703.22 TYPE B UD BACKFILL
PVC-SDR 35 HDPE	MDOT 703.13 3/4" CRUSHED STONE	MDOT 703.22 TYPE B UD BACKFILL, OR MDOT 703.13 3/4" CRUSHED STONE
PERFORATED PVC-SDR 35 HDPE	MDOT 703.13 3/4" CRUSHED STONE	MDOT 703.22 TYPE B UD BACKFILL, OR MDOT 703.13 3/4" CRUSHED STONE

**NOTE:**  
ALL BRACING AND SHEETING SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL MEET ALL STATE AND O.S.H.A. SAFETY STANDARDS.


**TRENCH SECTION**  
NOT TO SCALE

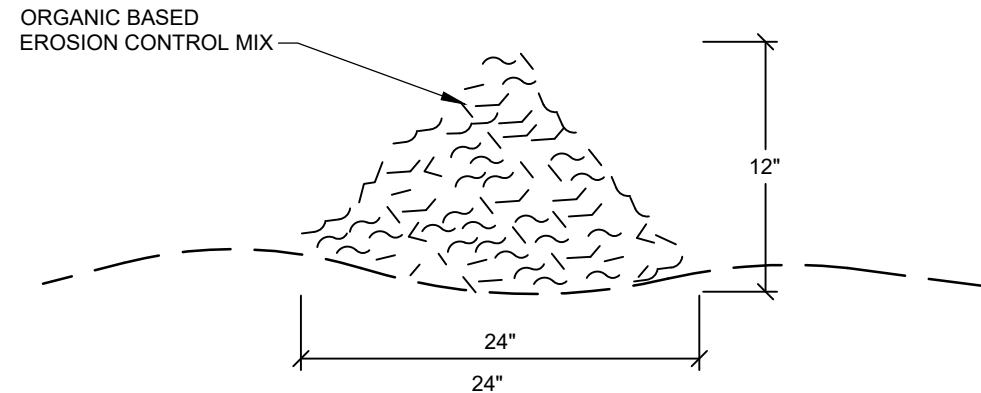

**COMPOSITION:**  
EROSION CONTROL MIX SHALL BE MANUFACTURED ON OR OFF THE PROJECT SITE SUCH THAT ITS COMPOSITION IS IN ACCORDANCE WITH THE MDEP MAINE EROSION AND SEDIMENT CONTROL BMP MANUAL, LAST REVISED 3/2003 OR LATER. IT MUST CONSIST PRIMARILY OF ORGANIC MATERIAL, SEPARATED AT THE POINT OF GENERATION, AND MAY INCLUDE: SHREDDED BARK, STUMP GRINDINGS, COMPOSTED BARK, OR ACCEPTABLE MANUFACTURED PRODUCTS. WOOD AND BARK CHIPS, GROUND CONSTRUCTION DEBRIS OR REPROCESSED WOOD PRODUCTS WILL NOT BE ACCEPTABLE AS THE ORGANIC COMPONENT OF THE MIX.



- INSTALLATION:**
1. THE BARRIER MUST BE PLACED ACROSS THE SLOPE, ALONG THE CONTOUR.
  2. EXISTING GROUND SHALL BE PREPARED SUCH THAT THE BARRIER MAY LIE NEARLY FLAT ALONG THE GROUND TO AVOID THE CREATION OF VOIDS AND BRIDGES IN ORDER TO MINIMIZE THE POTENTIAL OF WASH OUTS UNDER THE BARRIER
  3. THE BARRIER SHALL BE A MINIMUM OF 1 FOOT HIGH (AS MEASURED ON THE UPHILL SIDE) AND 2 FEET WIDE FOR SLOPES LESS THAN 5% IN GRADE AND SHALL BE WIDER TO ACCOMMODATE THE ADDITIONAL RUNOFF.
  4. EROSION CONTROL MIX CAN BE INSTALLED WHERE SILT FENCE IS ILLUSTRATED ON THE DESIGN PLANS IN AREAS EXCEPT IN, BUT NOT LIMITED TO, THE FOLLOWING AREAS: WETLAND AREAS, AT POINTS OF CONCENTRATED FLOW, BELOW CULVERT OUTLET APRONS, AROUND CATCH BASINS AND CLOSED STORM SYSTEMS AND AT THE BOTTOM OF STEEP SLOPES THAT ARE MORE THAN 50 FEET FROM TOP TO BOTTOM.

**EROSION CONTROL MIX BERM**  
NOT TO SCALE

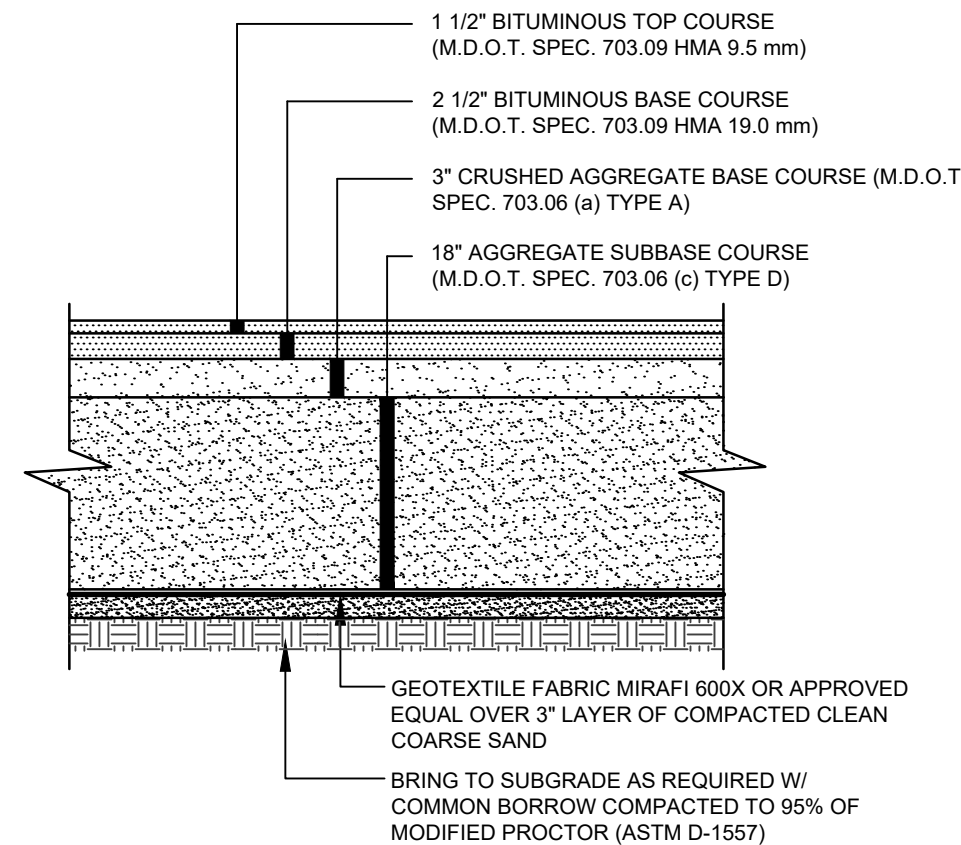

- NOTES:**
1. COMPACT GRAVEL SUBBASE AND BASE COURSES TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
  2. HOT MIX ASPHALT SURFACE COARSE SHALL BE COMPACTED TO 95% OF ITS THEORETICAL MAXIMUM DENSITY (ASTM D-2041). BASE COARSE SHALL BE COMPACTED TO 95% ±2.5% OF ITS THEORETICAL MAXIMUM DENSITY (ASTM D-2041).
  3. APPLY TACK COAT BETWEEN SUCCESSIVE LIFTS OF BITUMINOUS PAVEMENT.
  4. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.


**VEHICULAR PAVEMENT SECTION**  
NOT TO SCALE

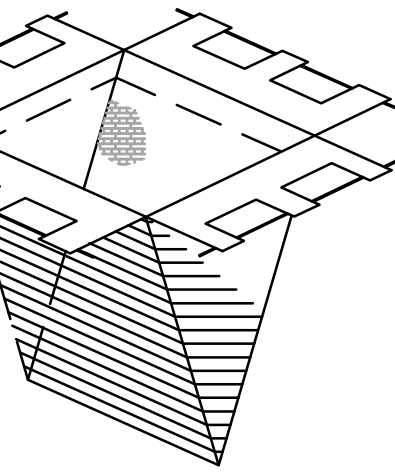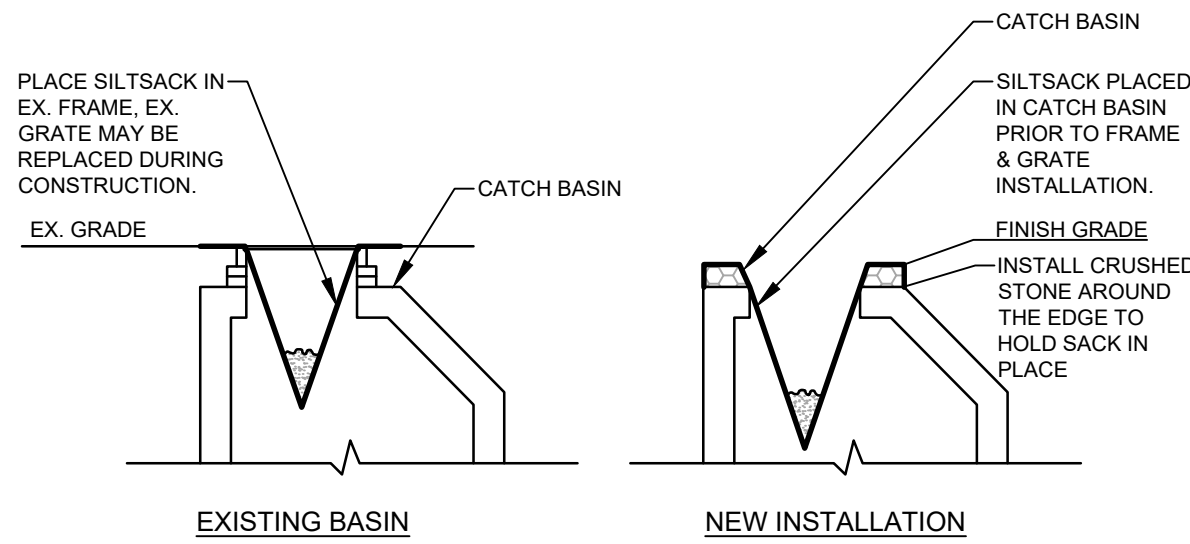

**SILT SACK PROTECTION**


**NOTES:**  
PRIOR TO FINAL GRADING AND PAVING OPERATIONS BEGIN A CATCH BASIN INSERT (SUCH AS A SILT SACK OR A DANDY BAG II) MUST BE INSTALLED IN EACH BASIN PER MANUFACTURES INSTRUCTIONS. HAY BALES SHOULD BE REMOVED ONCE INSERTS ARE INSTALLED.

**CATCH BASIN PROTECTION DETAIL**  
NOT TO SCALE

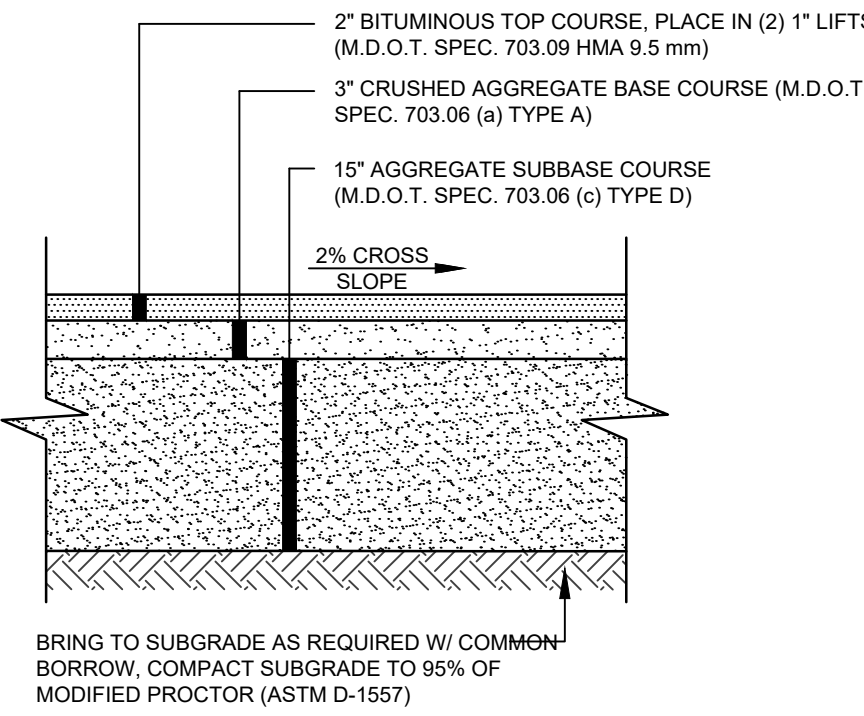


- NOTES:**
1. COMPACT GRAVEL SUBBASE AND BASE COURSES TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
  2. HOT MIX ASPHALT SURFACE COARSE SHALL BE COMPACTED TO 95% OF ITS THEORETICAL MAXIMUM DENSITY (ASTM D-2041). BASE COARSE SHALL BE COMPACTED TO 95% ±2.5% OF ITS THEORETICAL MAXIMUM DENSITY (ASTM D-2041).
  3. APPLY TACK COAT BETWEEN SUCCESSIVE LIFTS OF BITUMINOUS PAVEMENT.
  4. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.

**PEDESTRIAN (WALKWAY) PAVEMENT**  
NOT TO SCALE

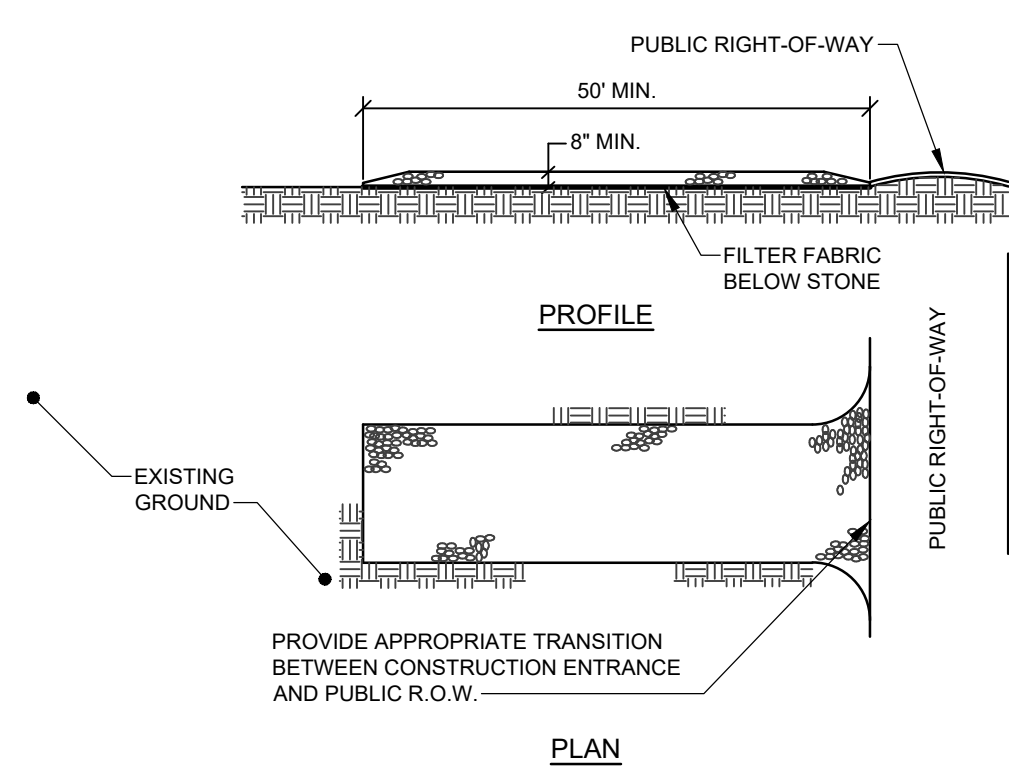

- NOTES:**
1. STONE SIZE- AASHTO DESIGNATION M43, SIZE NO. 2 (2 1/2" TO 1 1/2"). USE CRUSHED STONE.
  2. LENGTH- AS SHOWN ON PLANS, MIN. 50 FEET.
  3. THICKNESS- NOT LESS THAN EIGHT (8) INCHES.
  4. WIDTH- NOT LESS THAN FULL WIDTH OF ALL POINT OF INGRESS OR EGRESS.
  5. MAINTENANCE- THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND AND REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHT-OF-WAY MUST BE REMOVED IMMEDIATELY.


**STABILIZED CONSTRUCTION ENTRANCE**  
NOT TO SCALE

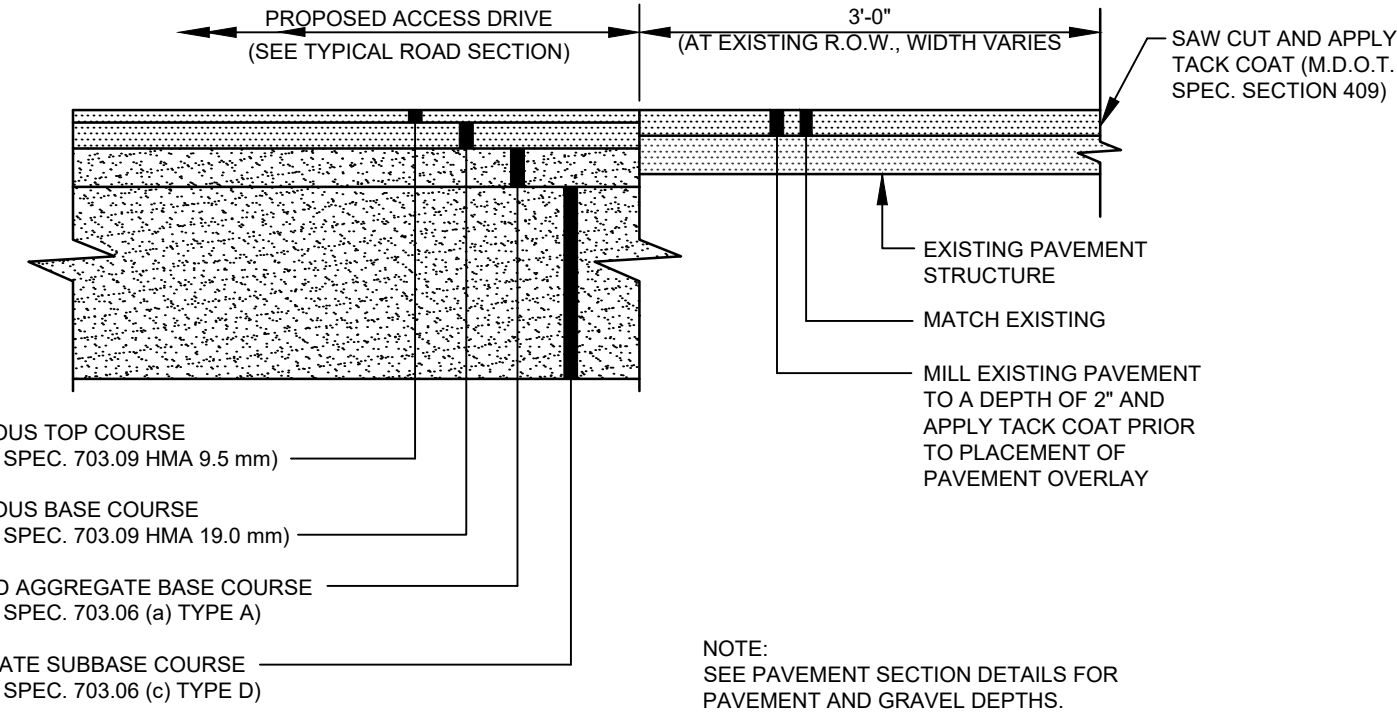

BITUMINOUS TOP COURSE  
(M.D.O.T. SPEC. 703.09 HMA 9.5 mm)  
BITUMINOUS BASE COURSE  
(M.D.O.T. SPEC. 703.09 HMA 19.0 mm)  
CRUSHED AGGREGATE BASE COURSE  
(M.D.O.T. SPEC. 703.06 (a) TYPE A)  
AGGREGATE SUBBASE COURSE  
(M.D.O.T. SPEC. 703.06 (c) TYPE D)

**NOTE:**  
SEE PAVEMENT SECTION DETAILS FOR PAVEMENT AND GRAVEL DEPTHS.


**TYPICAL PAVEMENT JOINT**  
NOT TO SCALE

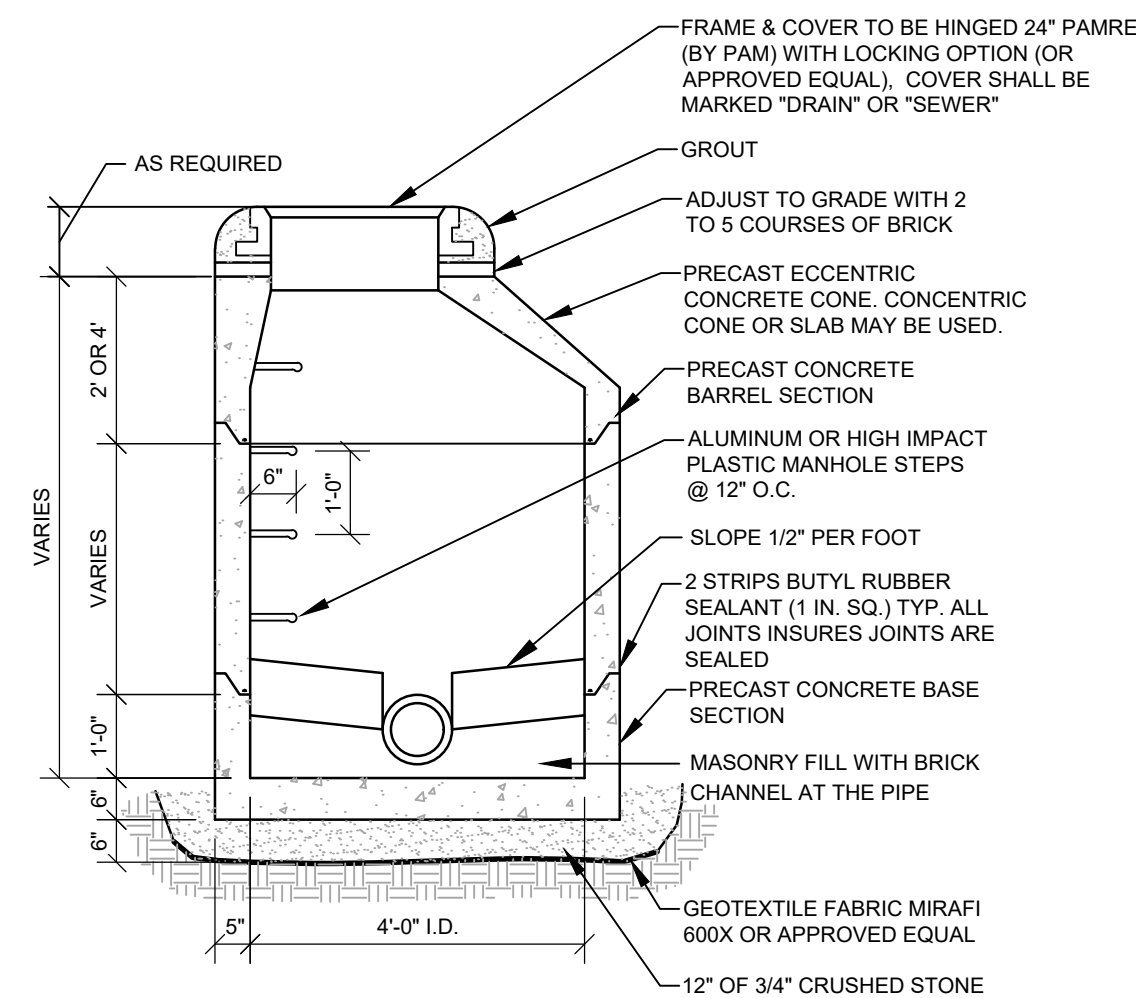

- NOTES:**
1. PIPE CONNECTIONS SHALL BE WATERTIGHT FLEXIBLE BOOT CONNECTORS.
  2. ALL PRECAST SECTIONS SHALL RECEIVE AN AQUA SAFE COATING, APPLIED PER MANUFACTURER RECOMMENDATIONS.
  3. BACKFILL WITH COMPACTED STRUCTURAL FILL.

**PRECAST SEWER MANHOLE**  
NOT TO SCALE

**PRECAST MANHOLE**  
NOT TO SCALE

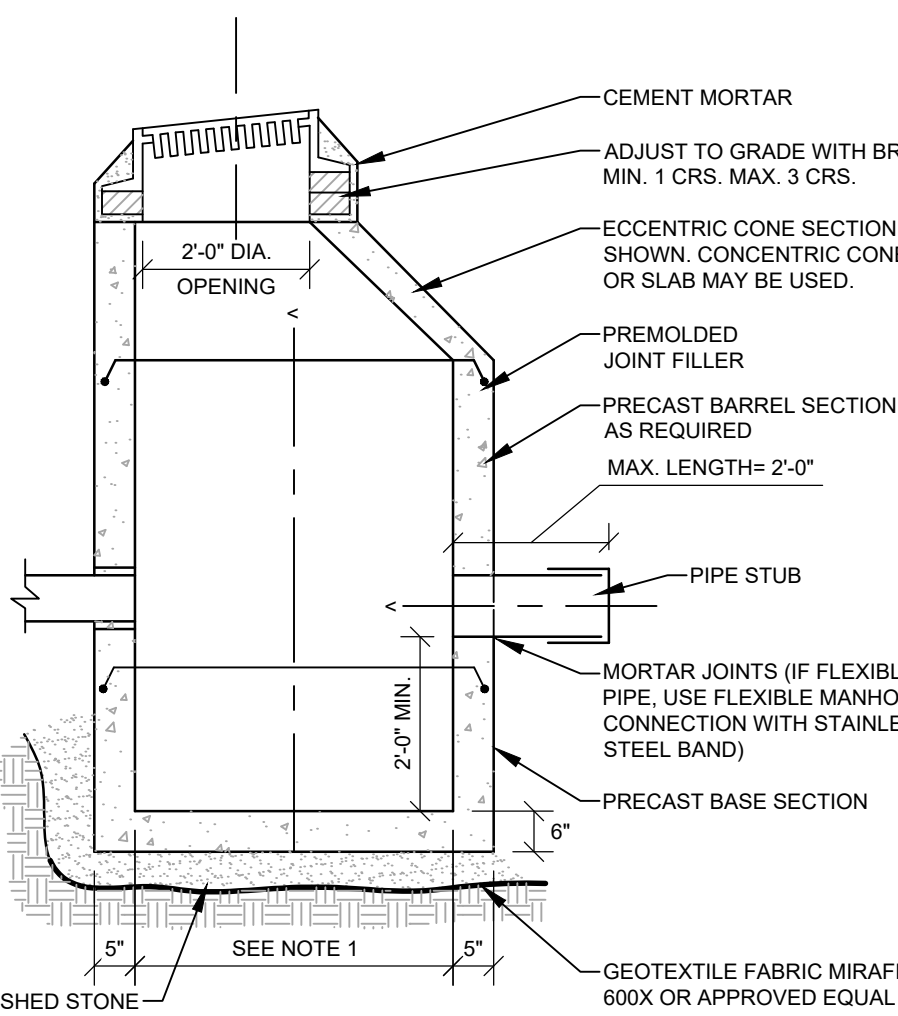

- NOTES:**
1. 4" I.D. TYPICAL. SOME STRUCTURES MAY REQUIRE LARGER I.D. PROVIDE SHOP DRAWINGS.
  2. DRAINAGE STRUCTURES TO BE DESIGNED FOR H-20 LOADING.
  3. PIPE SIZES AND INVERTS AS NOTED ON PLANS.
  4. CATCH BASIN FRAME AND GRATE TO BE HINGED 24" SQUARE REXUS (BY PAM) WITH LOCKING OPTION (OR APPROVED EQUAL).
  5. BACKFILL WITH COMPACTED STRUCTURAL FILL.

**CATCH BASIN**  
NOT TO SCALE


**SEBAGO**  
TECHNICS

WWW.SEBAGOTECHNICS.COM

75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel. 207-200-2100

REVISED PER TOWN COMMENTS  
07-15-24

CURRENT ISSUE STATUS:

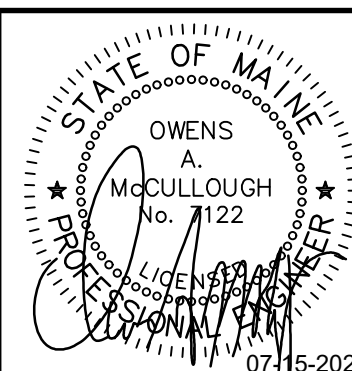


**SMRT** Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtinc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

CIVIL EROSION & SEDIMENT  
CONTROL DETAILS & CIVIL DETAILS

SHEET TITLE:




SCALE:


PROJECT MANAGER: OAM PROJECT NO: 17052  
A/E OF RECORD: OAM  
JOB CAPTAIN: BJB  
DRAWN BY: BJB  
SMRT FILE: 2.GC602-17052 SHEET NO. 2.GC602

NOT FOR CONSTRUCTION




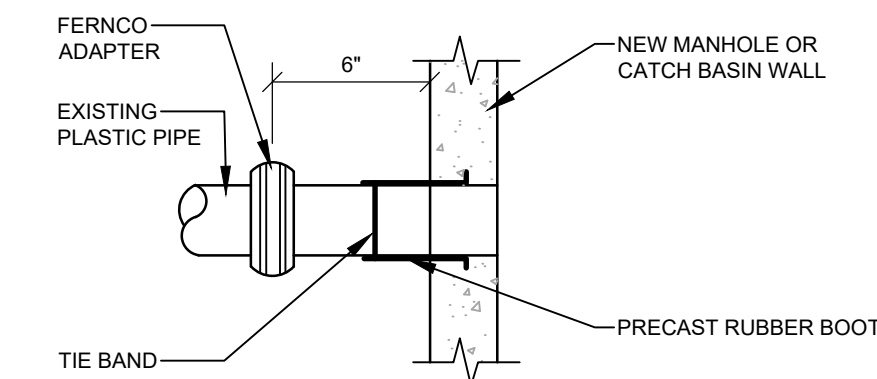


METHOD 1- EXISTING PIPE INTO NEW STRUCTURE

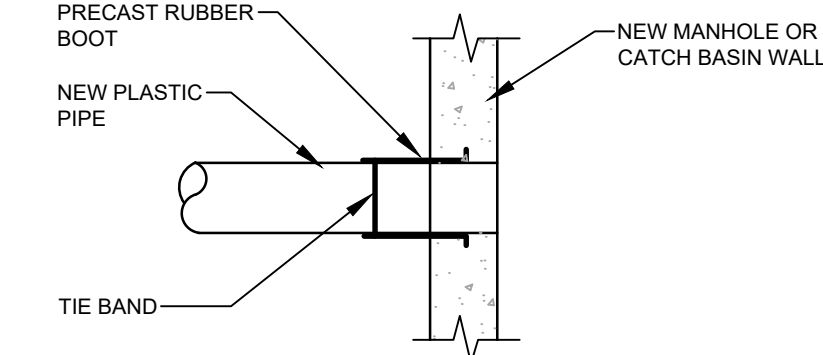

METHOD 2- NEW CONSTRUCTION

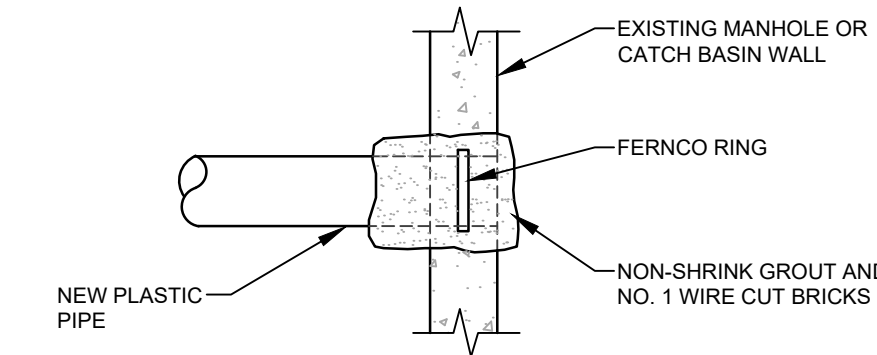


METHOD 3- NEW PIPE INTO EXISTING STRUCTURE

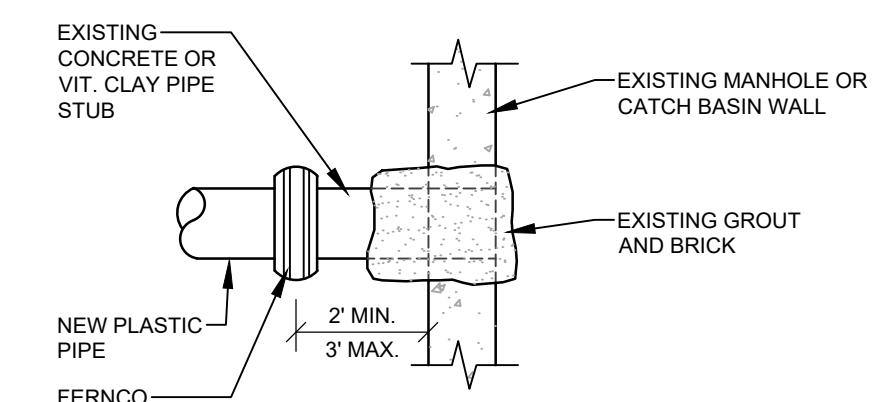

METHOD 4- NEW PIPE INTO EXISTING STUB

### PLASTIC PIPE CONNECTIONS

NOT TO SCALE

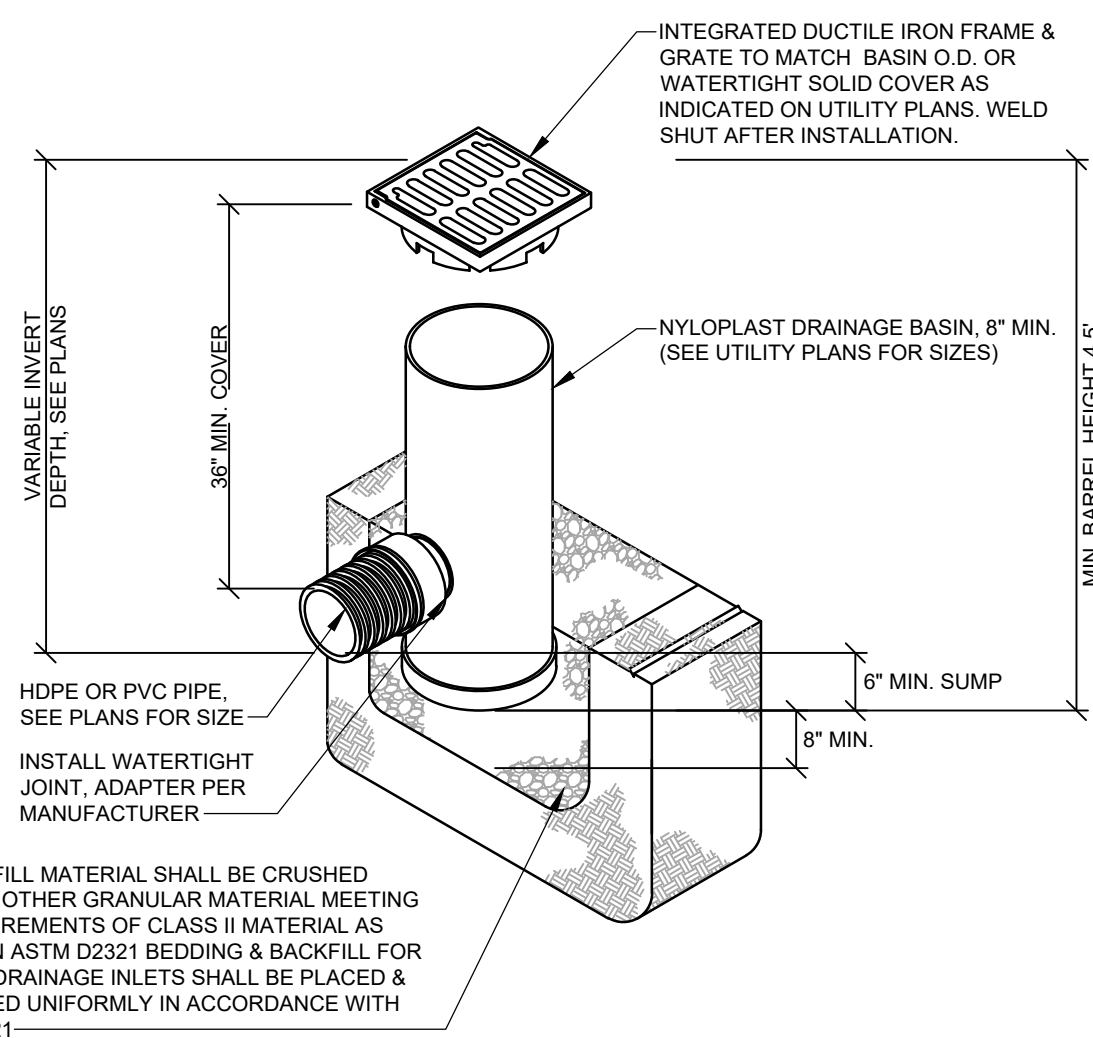


THE BACKFILL MATERIAL SHALL BE CRUSHED STONE OR OTHER GRANULAR MATERIAL MEETING THE REQUIREMENTS OF CLASS II MATERIAL AS DEFINED IN ASTM D2321 BEDDING & BACKFILL FOR SURFACE DRAINAGE INLETS SHALL BE PLACED & COMPACTED UNIFORMLY IN ACCORDANCE WITH ASTM D2321

- NOTES:
1. INSTALL BASIN IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
  2. INSTALL DOME GRATE IN PLANT BED AREAS.


### TYP. NYLOPLAST FIELD INLET

NOT TO SCALE

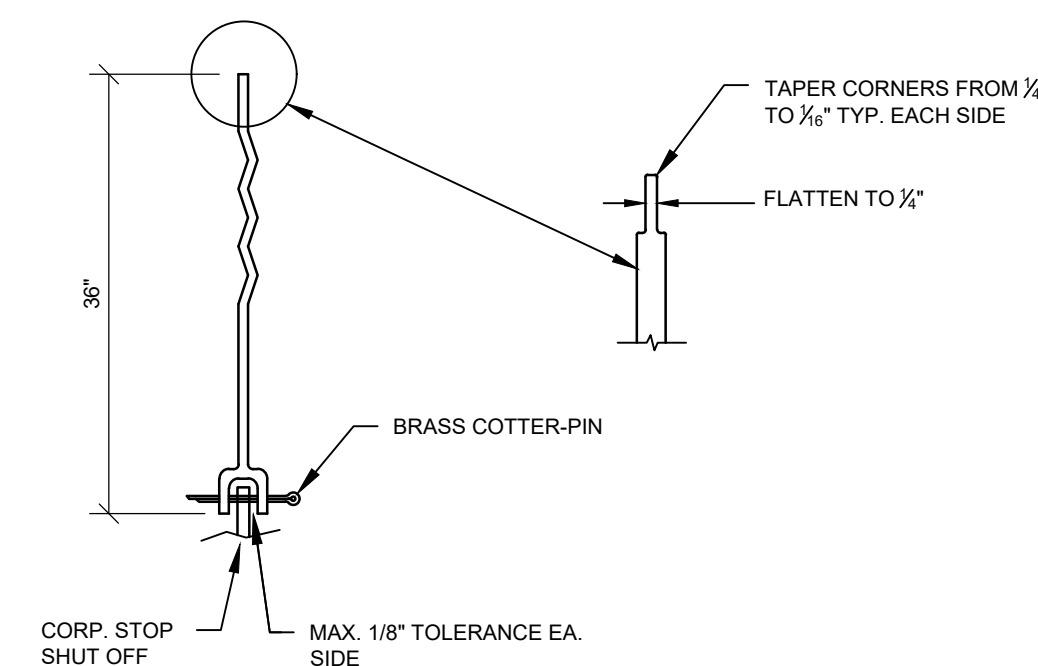

### SERVICE ROD

NOT TO SCALE


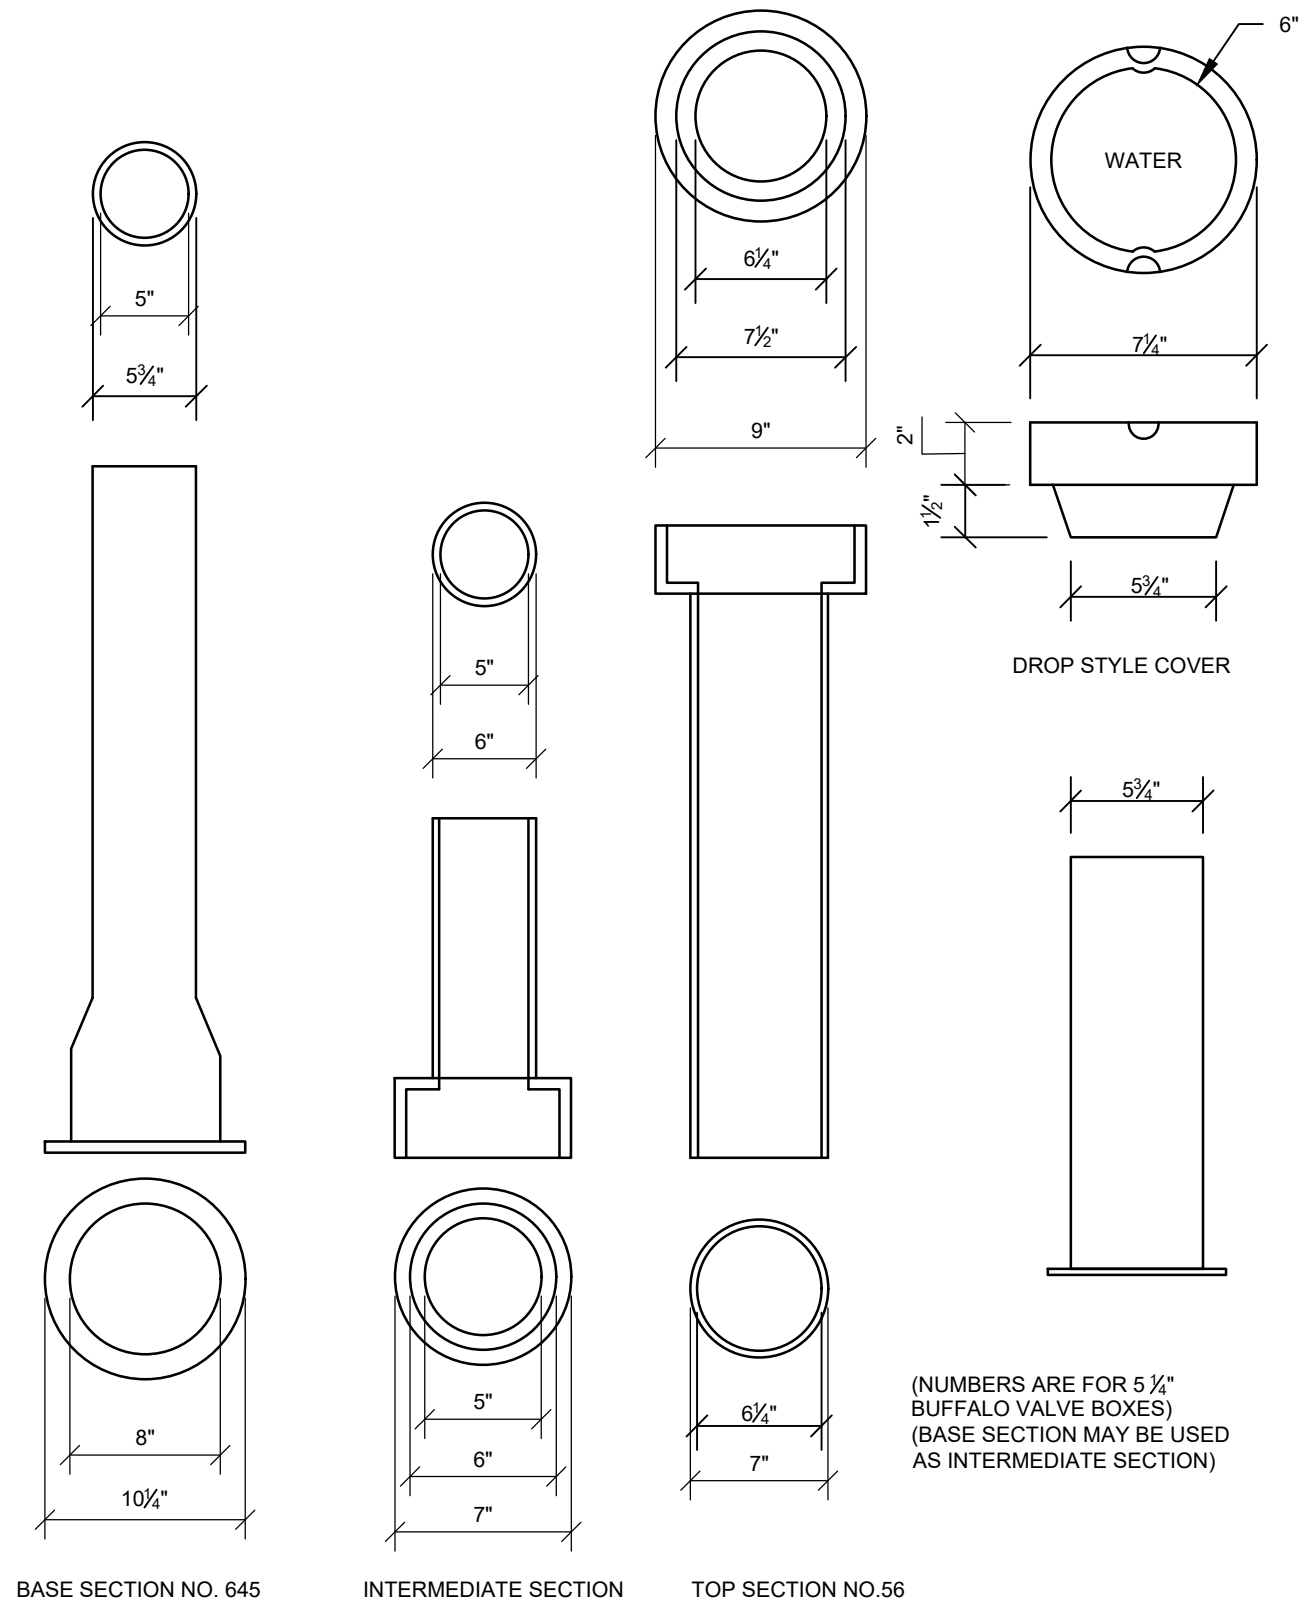


BASE SECTION NO. 645 INTERMEDIATE SECTION NO. 58 TOP SECTION NO. 56

NOTE: VALVE BOX COVERS SHALL BE WELDED SHUT WHEN INSTALLED INSIDE PERIMETER FENCE

### VALVE BOX & COVER


NOT TO SCALE

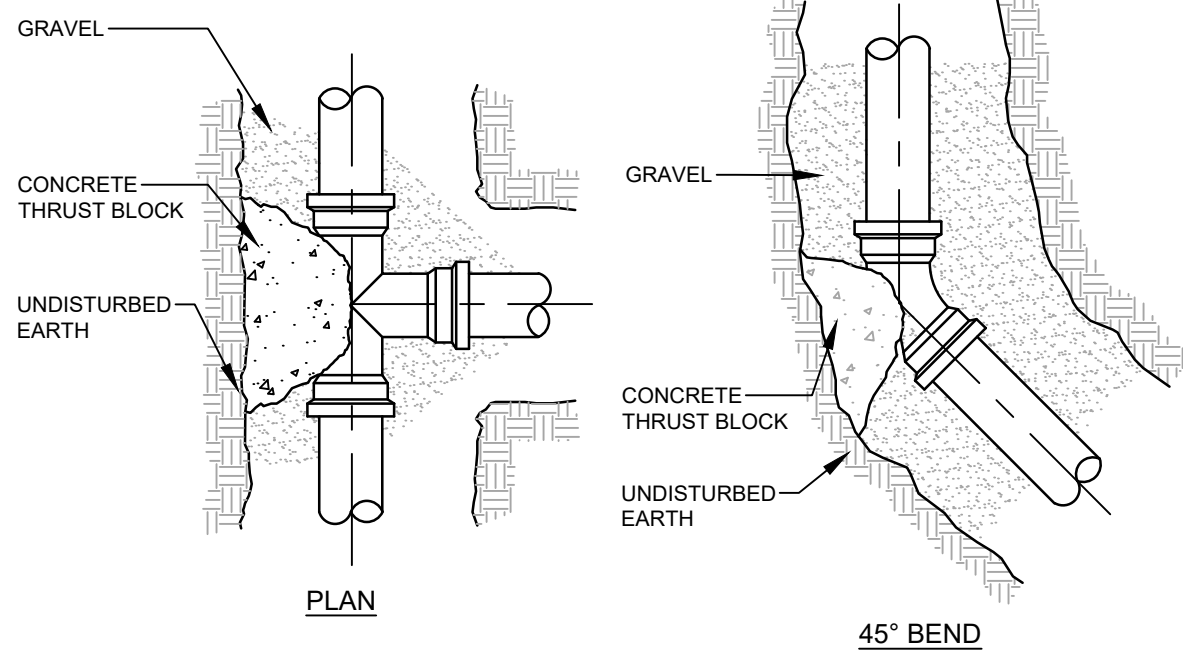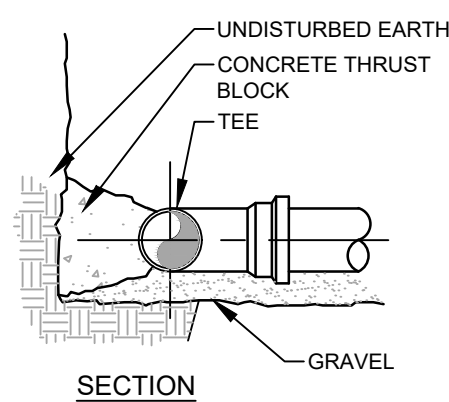

### TEE & BEND DETAIL


NOT TO SCALE

- NOTE:
1. ANY EXTENSION OF SERVICE BOX REQUIRES:
    - A. 1" FEMALE IRON PIPE COUPLING
    - B. 1" THREADED PIPE (THIS IS TO BE A NON-WELDED, TWO PIECE ARRANGEMENT. SLIP ON ADAPTERS ARE NOT PERMISSIBLE.)
  2. SERVICE BOX AND FOOT PIECE SHALL ONLY BE USED OUTSIDE OF PERIMETER FENCE IN GRASSED AREAS.

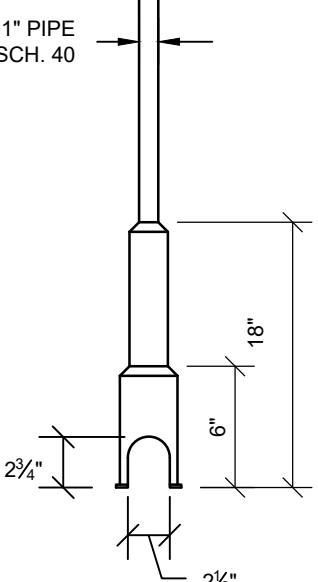


### SERVICE BOX

NOT TO SCALE




### FOOT PIECE

NOT TO SCALE

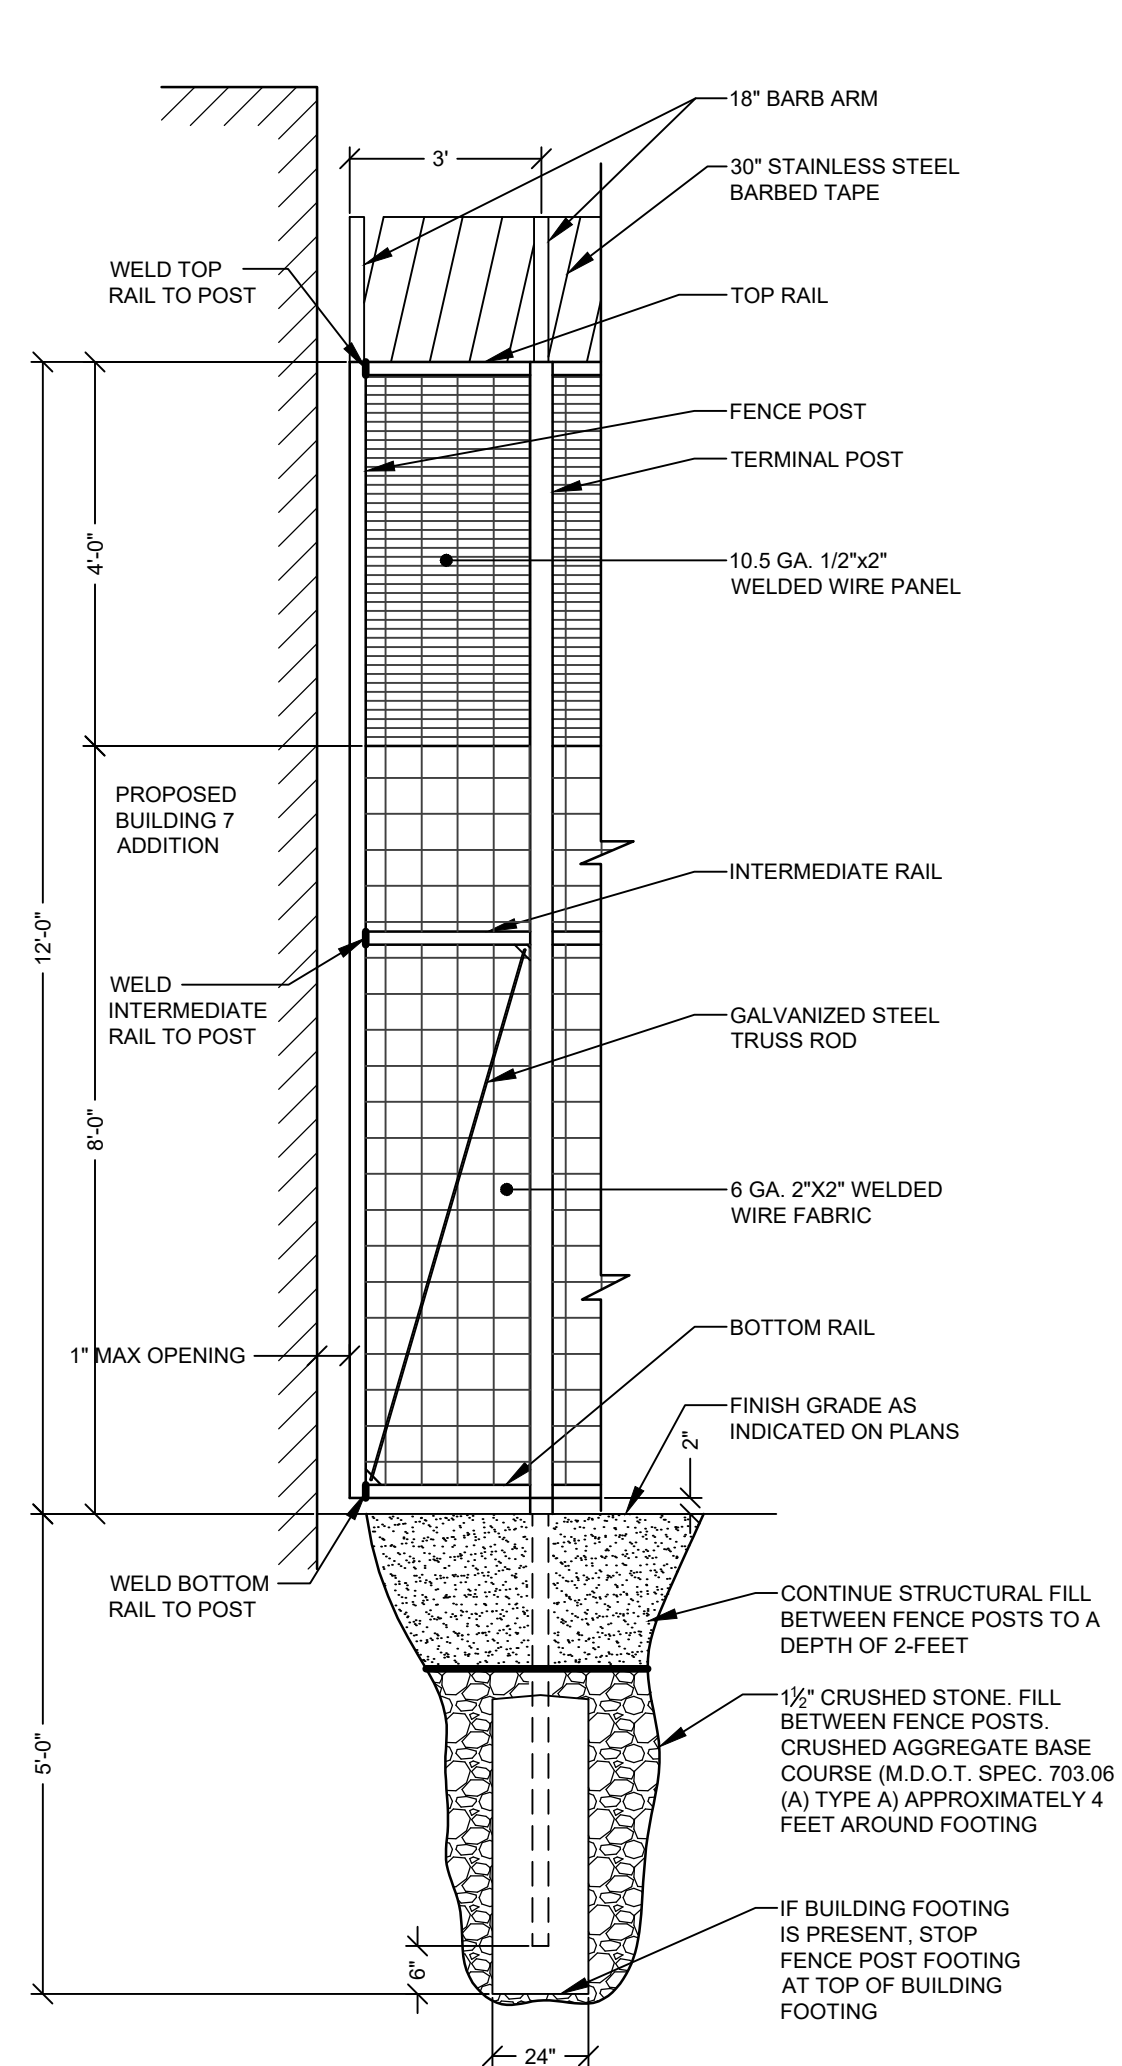


### CONTROL FENCE AT BUILDING DETAIL

NOT TO SCALE

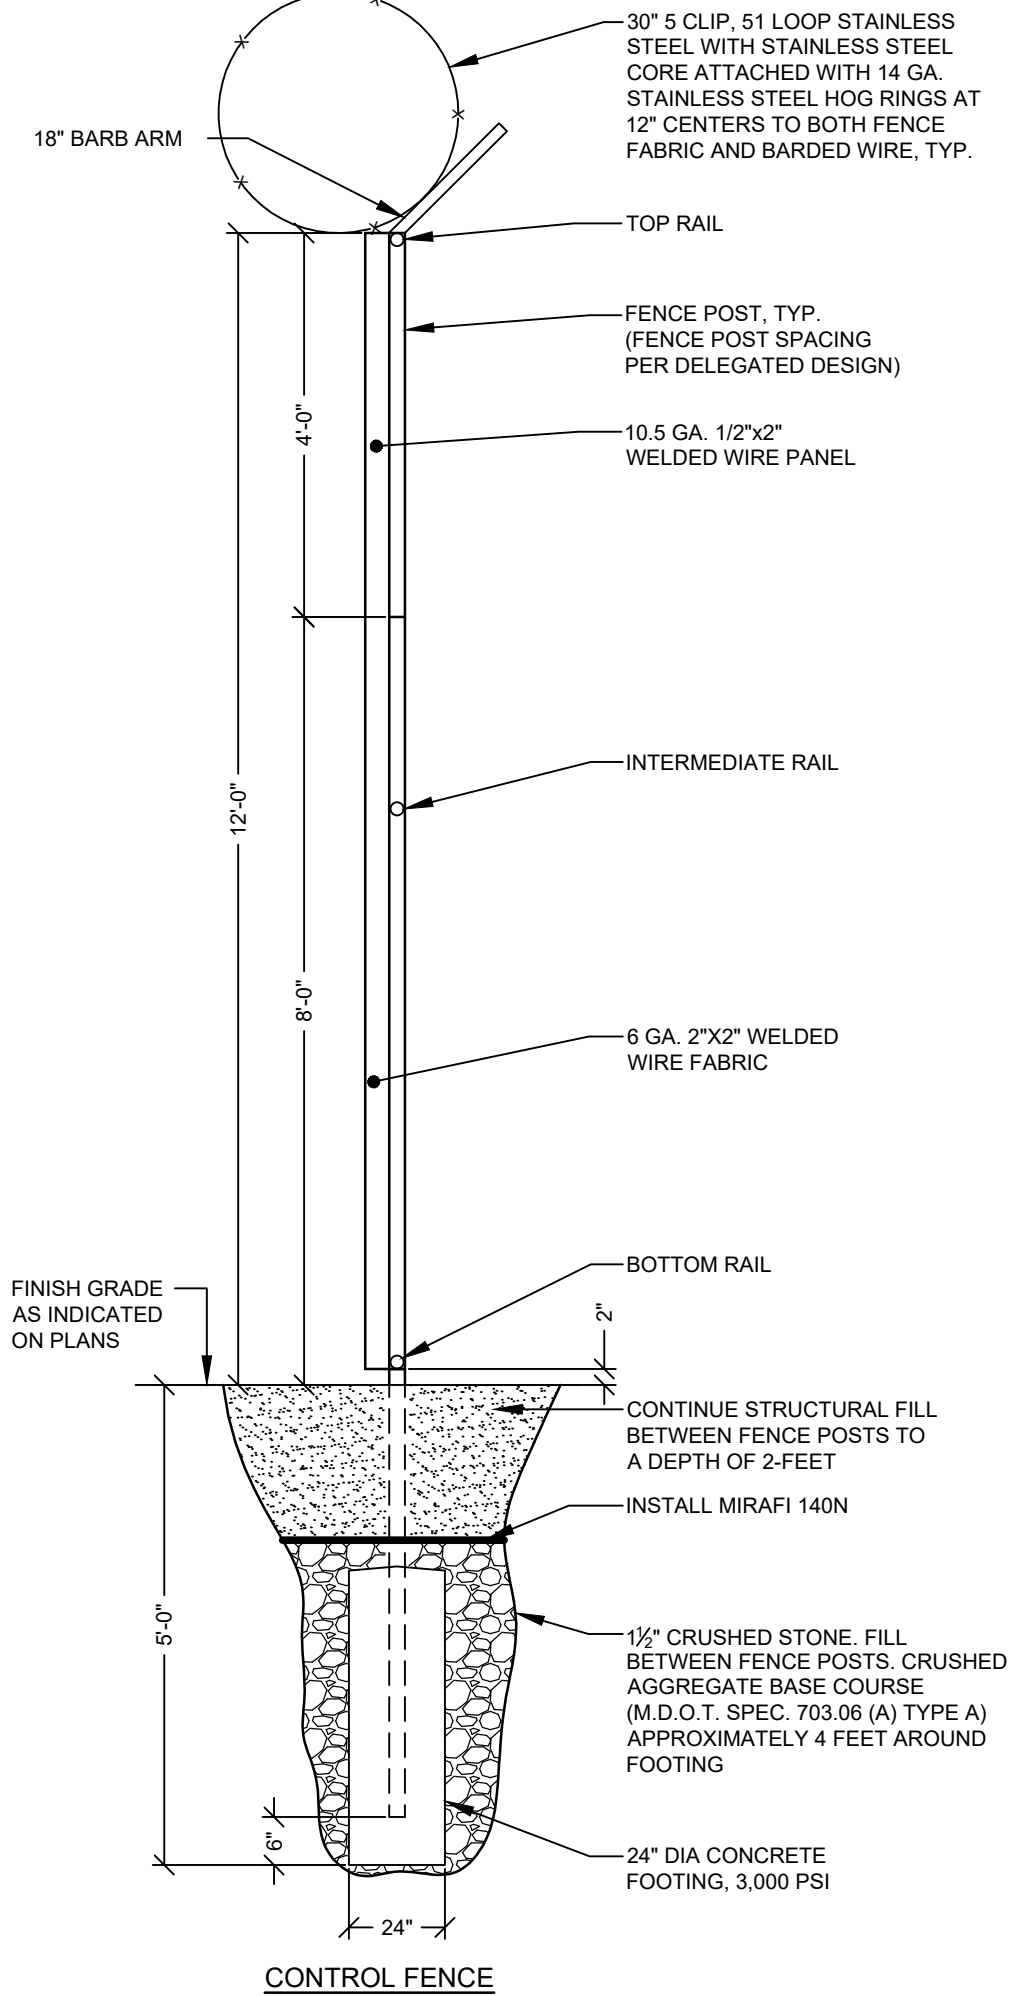

### SECTION VIEW AND FENCE FOUNDATION

NOT TO SCALE

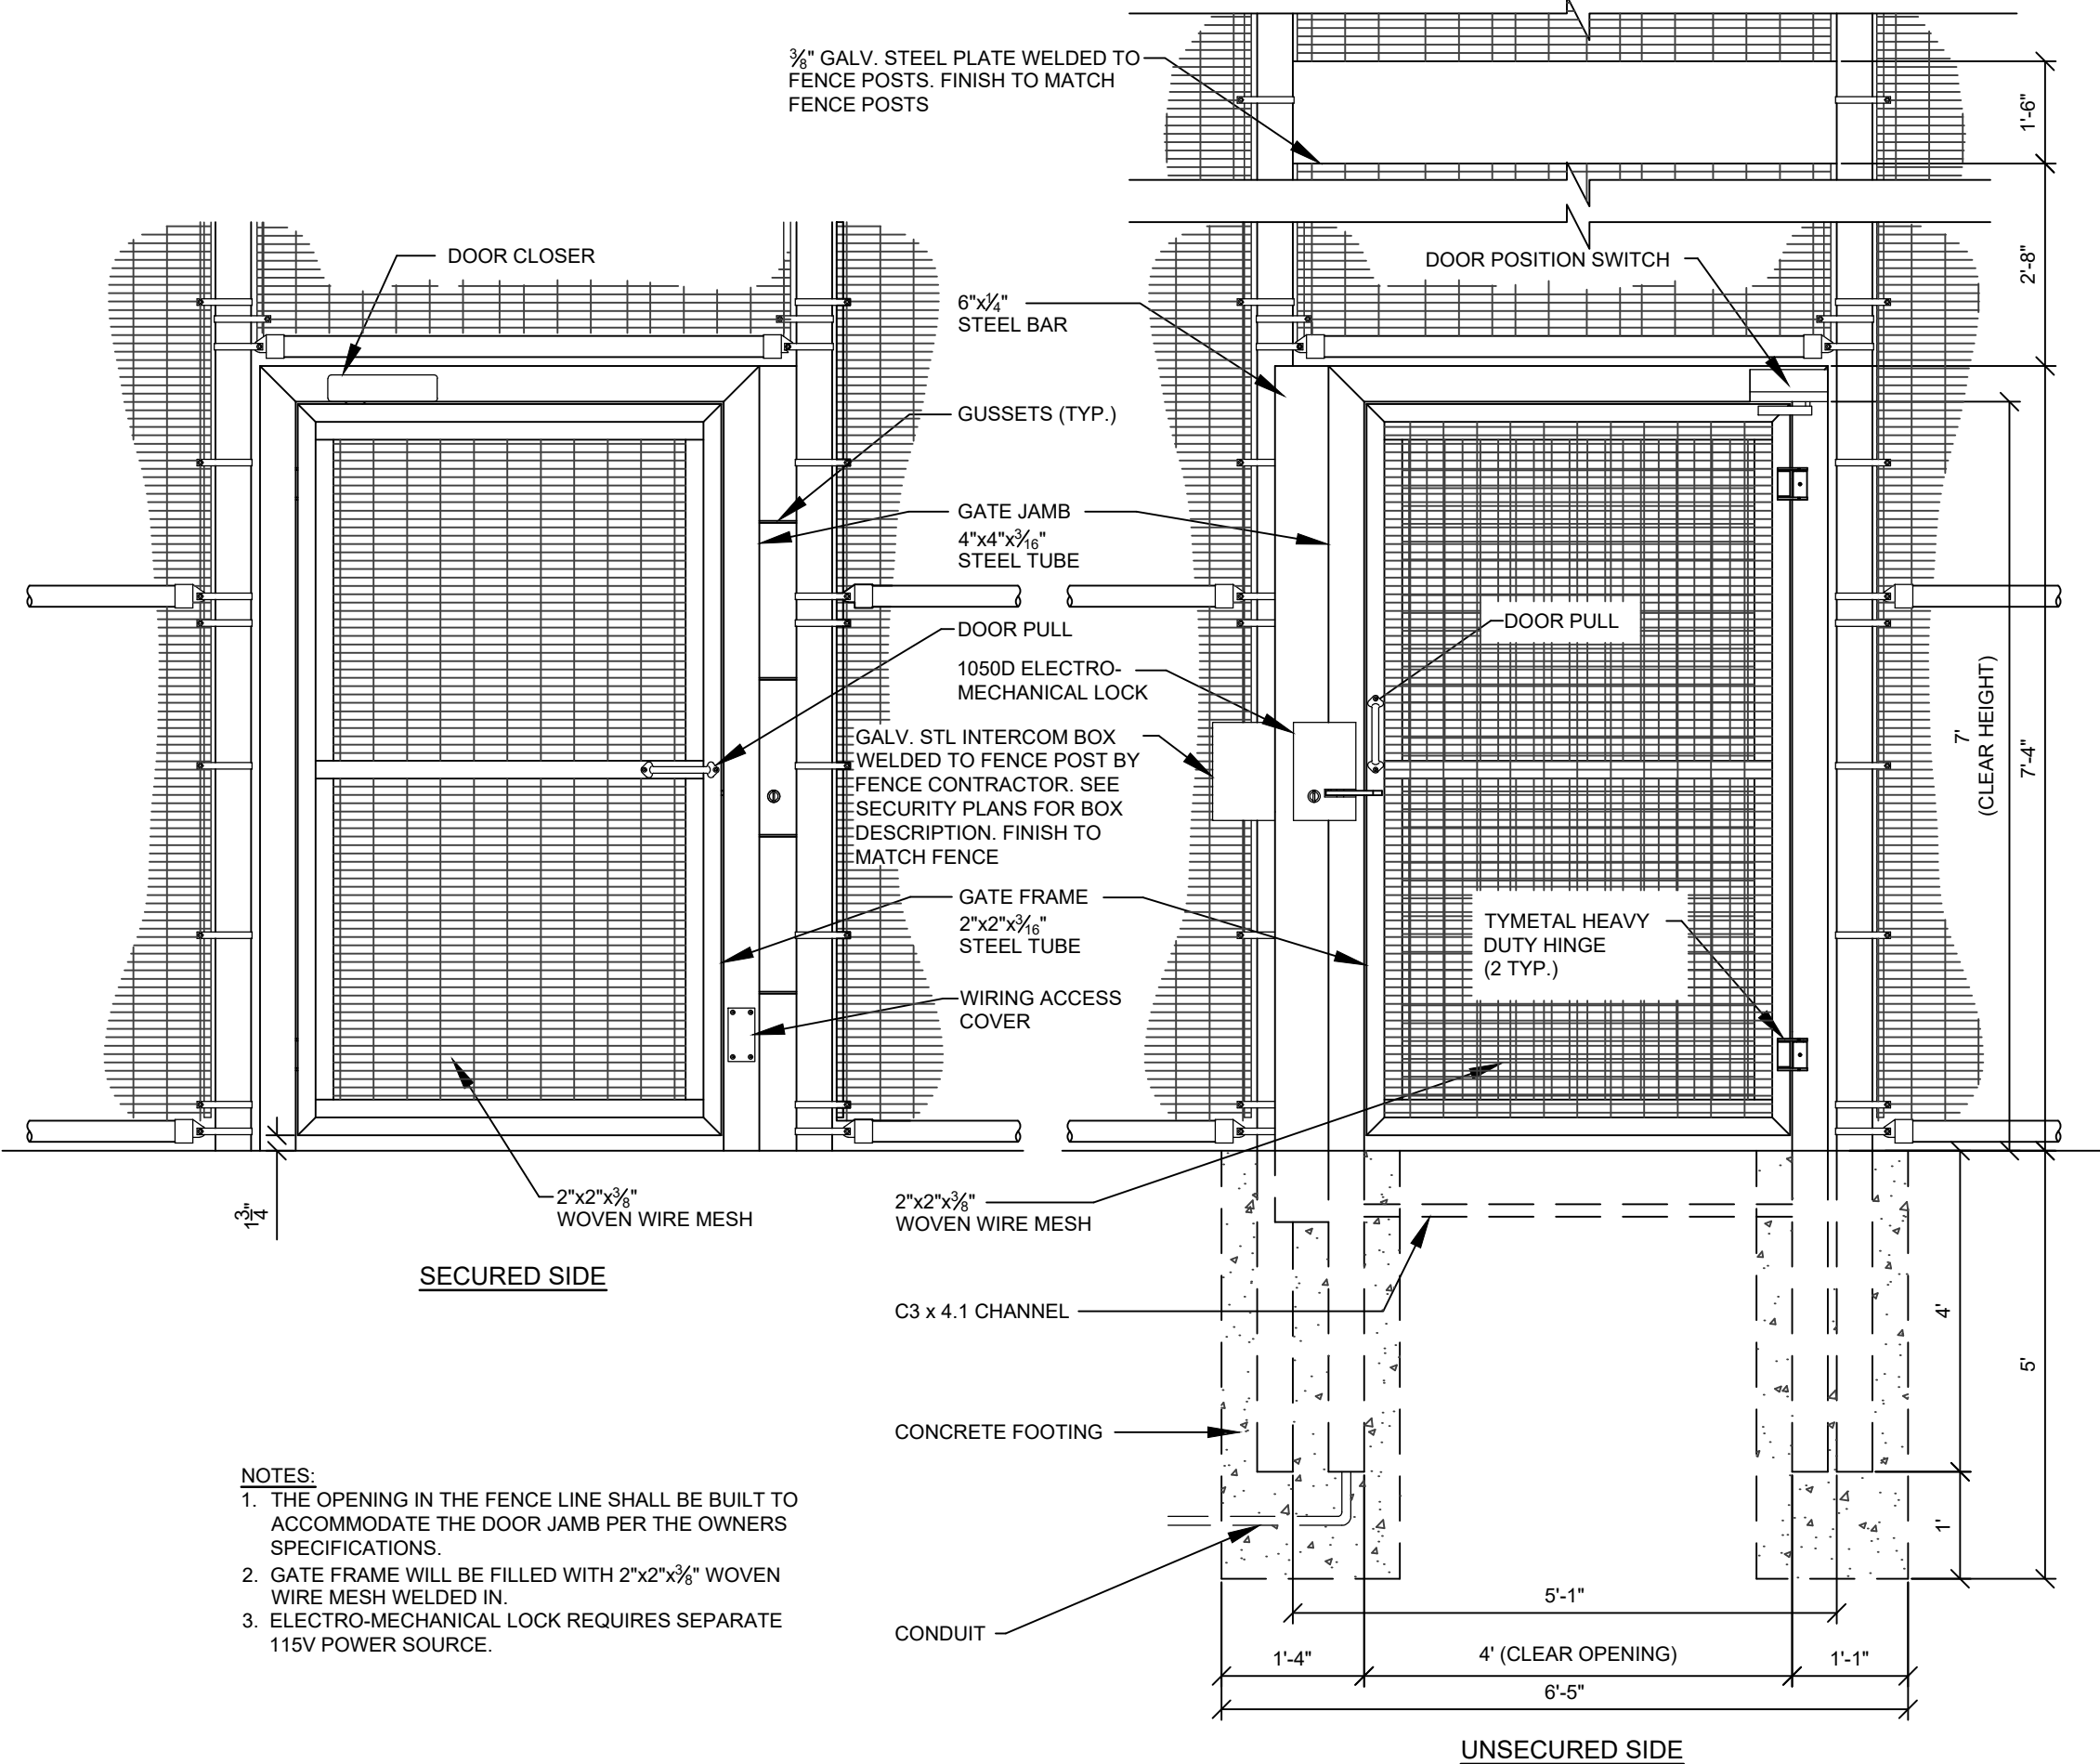

- NOTES:
1. THE OPENING IN THE FENCE LINE SHALL BE BUILT TO ACCOMMODATE THE DOOR JAMB PER THE OWNERS SPECIFICATIONS.
  2. GATE FRAME WILL BE FILLED WITH 2"x2"x1/8" WOVEN WIRE MESH WELDED IN.
  3. ELECTRO-MECHANICAL LOCK REQUIRES SEPARATE 115V POWER SOURCE.


### SWING GATE ELEVATION

NOT TO SCALE

**SEBAGO**  
TECHNICS  
WWW.SEBAGOTECHNICS.COM  
75 John Roberts Rd.  
Suite 4A  
South Portland, ME 04106  
Tel: 207-200-2100

B	REVISED PER TOWN COMMENTS	07-15-24
A	ISSUED FOR TOWN REVIEW	06-17-24
REV	DESCRIPTION	DATE

REVISED PER TOWN COMMENTS  
07-15-24  
CURRENT ISSUE STATUS:

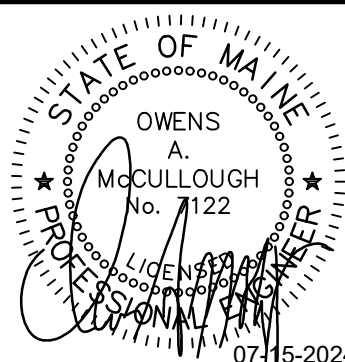

**SMRT**  
Architecture • Engineering • Planning  
SMRT Architects and Engineers  
75 Washington Ave - Suite 3A  
Portland, Maine 04101  
1.877.700.7678  
www.smrtninc.com

MAINE DEPARTMENT OF CORRECTIONS -  
WOMEN'S MEDICAL HEALTH ADDITION

MAINE CORRECTIONAL CENTER  
WINDHAM, MAINE CIVIL

CIVIL DETAILS



SCALE:  
PROJECT MANAGER: OAM PROJECT NO: 17052  
A/E OF RECORD: OAM  
JOB CAPTAIN: BJB  
DRAWN BY: BJB  
SMRT FILE: 2.GC603-17052 SHEET NO. 2.GC603  
NOT FOR CONSTRUCTION



