

LOCATION PLAN SCALE: |" = 3,000'

APPROVED: TOWN OF WINDHAM STAFF REVIEW COMMITTEE.				
APPROVED BY:	DATE:			

۵ () \dots NEW FOUNDATION ~~~~/ --------\ 335 -333 י BW = 336 <u>TW = 337</u> `BW = 335 N/F <u>TW = 337</u> DSD PROPERTIES LLC. N 34258 PG 212 BW = 334 ∖<u>TW = 337</u> `>BW = 334 --► <u>TW = 336 ----</u> BW = 334 <u>TW = 335</u> `--335.----.-----334--~_/~-33¹ 330---6 - SHASTA VIBURNUM _____ _____

on the property. Shared parking arrangements are encouraged. *ZONING STANDARDS FROM TOWN OF WINDHAM LAND USE ORDINANCE, DATED SEP. 22, 2009, EFFECTIVE OCT. 22, 2009, AMENDED JUNE 12,

PARKING REQUIREMENTS: SECTION 812. C. 2. (a). No minimum number of parking spaces are required. The applicant should demonstrate that the number of spaces provided onsite will meet the needs of the anticipated uses

2018.

- 9. REAR SETBACK: 6 FEET

ZONING INFORMATION*:

3. LOT AREA: NONE

- 8. SIDE SETBACK: 6 FEET

2. PERMITTED USES: RETAIL SALES

4. LOT COVERAGE MAXIMUM: NONE

- PROVIDED:

- 6. MINIMUM STREET FRONTAGE: 100 FEET

5. MAXIMUM BUILDING HEIGHT: NONE

I. CLASSIFICATION: COMMERCIAL DISTRICT | (CI)


- 7. FRONT SETBACK: 10-20 FEET

- PLAN REFERENCES:
- I. TOPOGRAPHIC AND PROPERTY BOUNDARY INFORMATION TAKEN FROM A COMPILATION OF THE FOLLOWING:
- I.I. A PLAN TITLED "SKETCH PLAN-I", PREPARED BY ST.CLAIR ASSOCIATES OF 34 FOREST LANE, CUMBERLAND, ME 04021, DATED OCT. 11, 2017.
- I.2. FIELD OBSERVATIONS & GPS SURVEY BY WALSH ENGINEERING ASSOCIATES, INC. ON JULY 12, 2018.
- PARCEL INFORMATION: I. OWNER OF RECORD: VESTPROP, INC. 86 PINE RIDGE
- ROAD, YARMOUTH, ME 04097.
- 2. STREET ADDRESS: 989 ROOSEVELT TRAIL, WINDHAM, MF
- 3. PARCEL SHOWN HEREON IS TOWN OF WINDHAM TAX MAP 021, LOT 018.
- 4. TOTAL AREA OF PARCEL: 34,491 S.F OR 0.79 ACRES
- 5. CURRENT ZONE: COMMERCIAL DISTRICT | (C1)
- FLOOD ZONE INFORMATION:
- I. CLASSIFICATION: ZONE C
- 2. FLOOD INSURANCE RATE MAP COMMUNITY PANEL NUMBER 230189 0015 B
- 3. EFFECTIVE DATE: SEP. 2, 1981

- GENERAL NOTES:
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING "DIG SAFE" AND LOCAL UTILITY COMPANIES AT BUSINESS DAYS, BUT NOT MORE THAN 30 CALENDAR DAYS, PRIOR TO THE COMMENCEMENT OF ANY EXC ACCORDANCE WITH MAINE STATE LAW. "DIG SAFE" TELEPHONE NUMBER IS 1-888-344-7233.
- 2. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL AND ANY MEANS, METHODS, AND TECHNIQUE PERFORM THE WORK SHOWN ON THE PLANS.
- 3. ALL WORK SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS INCLUDING ALL SAFETY RI
- 4. ALL WORK SHALL BE IN CONFORMANCE ALL UTILITY COMPANIES STANDARDS.
- 5. THE CONTRACTOR SHALL SECURE ALL NECESSARY PERMITS FOR THE WORK SHOWN ON THESE PLANS PR CONSTRUCTION.
- 6. ALL PAVEMENT/CONCRETE CUTS SHALL BE SAW CUT TO RESULT IN CLEAN EDGES. A TACK COAT SHALL BE THE PAVEMENT CUT EDGES AND THE NEW PAVEMENT BUTTED TO IT, UNLESS OTHERWISE DIRECTED BY TH OWNER'S REPRESENTATIVE.
- 7. ALL WORK SHALL COMPLY WITH THE TOWN OF WINDHAM STREET OPENING PERMIT REQUIREMENTS.
- 8. ALL EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO ANY SITE EXCAVATION OR REGRADING WRITTEN EROSION CONTROL PLAN AND DRAWINGS FOR FURTHER EROSION CONTROL GUIDELINES.
- 9. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS SHOWN ON THE DRAWINGS. IF ANY DISCREPANCE OWNER OR OWNER'S REPRESENTATIVE SHALL BE NOTIFIED IMMEDIATELY.

LAYOUT, MATERIALS, AND UTILITY NOTES:

- I. ALL DIMENSIONS, LOCATIONS AND CONTROLS SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRI CONSTRUCTION ACTIVITIES. ANY DISCREPANCIES SHALL BE REPORTED IMMEDIATELY TO THE OWNER OR (REPRESENTATIVE.
- 2. DO NOT SCALE THE DRAWINGS FOR REQUIRED DIMENSIONS. ANY DISCREPANCIES IN DIMENSIONING SHA REPORTED IMMEDIATELY TO THE OWNER'S REPRESENTATIVE.
- 3. ALL ANGLES ARE 90 DEGREES UNLESS OTHERWISE SHOWN.
- 4. ALL EDGES OF PAVING SHALL BE STAKED OUT BY THE CONTRACTOR AND REVIEWED BY THE OWNER'S REF PRIOR TO CONSTRUCTION.
- 5. PROVIDE A SMOOTH TRANSITION WHERE NEW WORK MEETS EXISTING.
- 6. ALL DISTURBED AREAS NOT OTHERWISE TREATED SHALL BE LOAMED AND SEEDED.
- 7. CENTERLINES OF DRIVEWAY AND WALKWAY, PROPOSED PARKING LOTS AND PROPOSED UTILITY LINES SHA LOCATED AND LAID OUT BY PROFESSIONALLY LICENSED SURVEYOR.

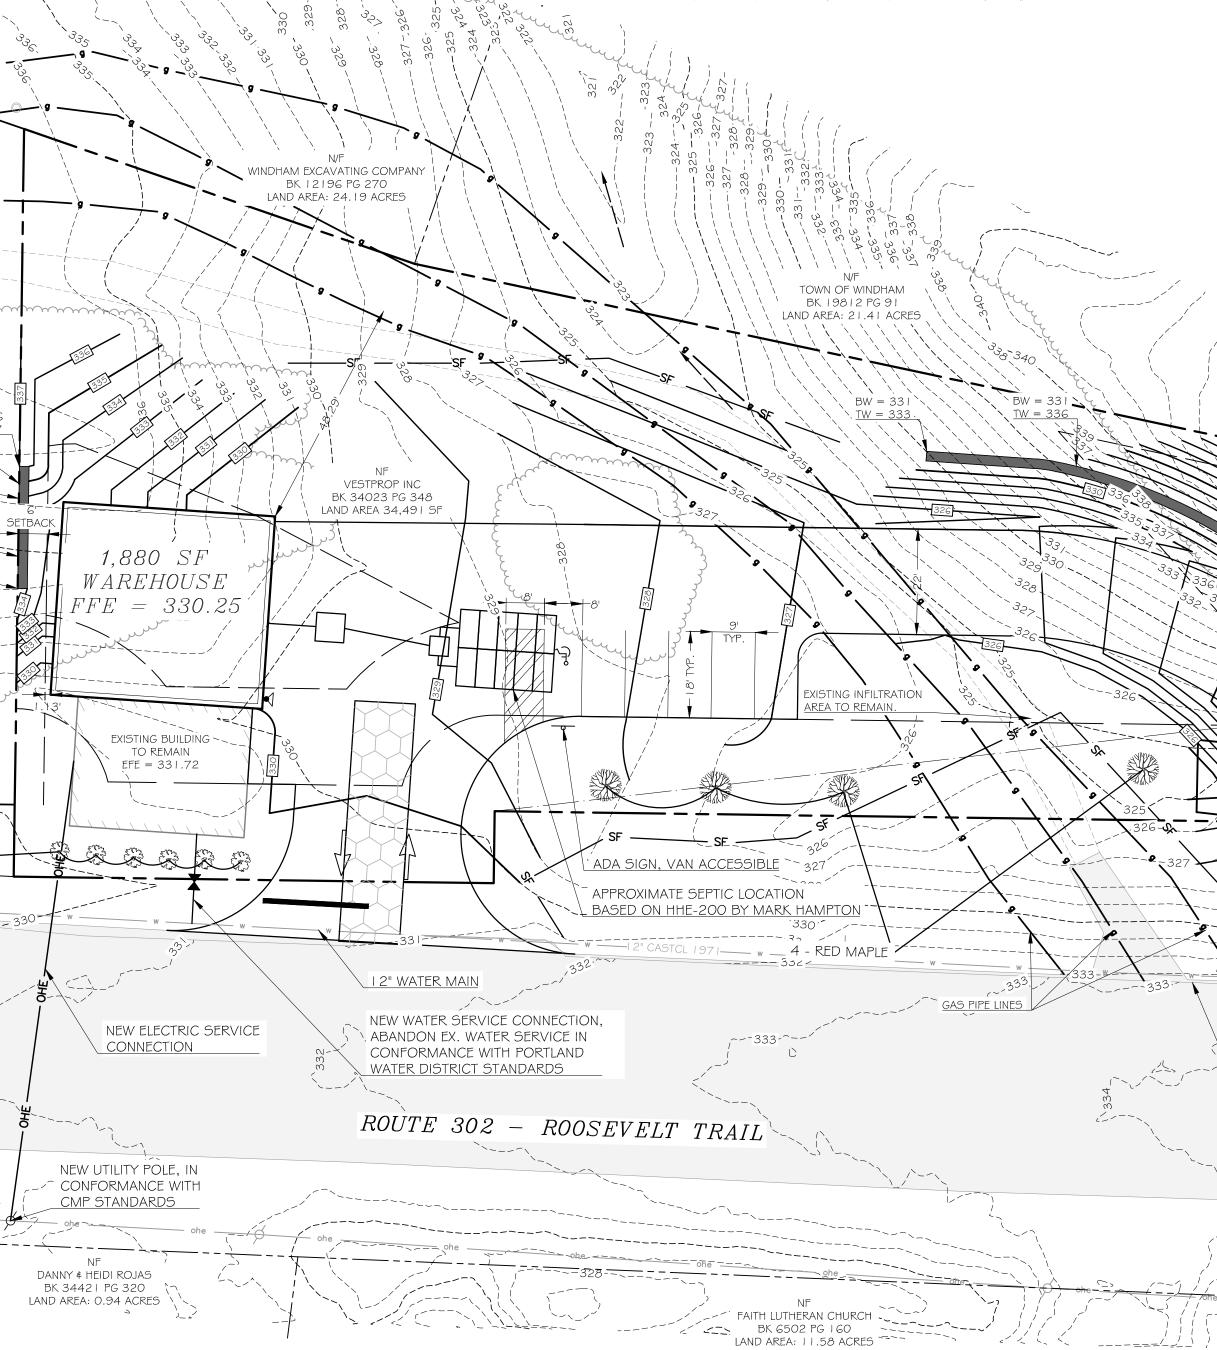

AT LEAST THREE (3)		LEGEND			
EXCAVATION, IN		PROPERTY LINE		WAI	JSH
QUES EMPLOYED TO		EASEMENT LINE PROPERTY SETBACK		ENGINEERING AS	
REGULATIONS (OSHA).		ABUTTING PROPERTY LINE	101	One Karen Dr., Suite 2A \ ph: 207.553.9898	Westbrook, Maine 04092 www.walsh-eng.com
PRIOR TO	IOI	INDEX CONTOUR		Copyright	
BE APPLIED ALONG	·/////////////////////////////////////	BUILDING WATERLINE		Copyright	0 2010
THE OWNER OR	X	WATER LINE GATE VALVE	H		
	ohe	OVERHEAD ELECTRIC LINE UTILITY POLE	——— ОНЕ ———— , С		111////
NG. REFER TO THE		LANDSCAPE/RETAINING WALL EDGE OF PAVEMENT		5. 10/1	MA11/1/1 18 NK //
NCIES ARE FOUND, THE		EDGE OF GRAVEL		GREE S. 10/1/ THOM GREE No. 42	₩
		TREELINE BUSH/SHRUB TREE	All Ess		206
PRIOR TO ANY R OWNER'S		FLOW ARROW			
HALL BE		ARROW STRAIGHT HANDICAP SYMBOL	ب ب	Jusmas.	frein
		HANDICAL STMIDOL			
REPRESENTATIVE		PARKING STRIPING			
		TRAFFIC/PARKING SIGN			
		STOP LINE WALL MOUNTED LIGHT	<		
HALL BE		SILT FENCE	SF		
		CONSTRUCTION ENTRANCE	$\exists \exists $		
	GRADING, DRAINAGE AND U				
		UCTION ACTIVITIES, CONTRACTOR SH. PANCIES SHALL BE REPORTED IMMEDIA IVE.			
	2. ALL AREAS NOT REQUIR	RING GRADING SHALL BE LEFT UNDISTL AND PRESERVE EXISTING VEGETATION			
	3. GRADE ALL NEW WORK	FOR POSITIVE DRAINAGE AND NO PUD			
		S INCLUDING UTILITIES MUST CONFOR	RM TO THE TOWN OF WINDHAM		
	TECHNICAL GUIDELINES	AND STANDARDS.			
<u></u>					
/					
341			R'		
347		6	N	nse	260
		6 g	n	Phouse	ПС. Зd № 04097
		6	R	arehouse	e Rd aine
		6		Ware! toosevelt Tra m, Maine 04	e Rd aine
	345 344 345 344 345 344 345 344 345 344 345 344 345 344 345 344 345 344 345 344 345 345 344 345 344 345 344 345 344 345 344 345 345 344 335 344 335 345 339 355 345 345 345 345 345 345 345 345 345 345 345 345 345 345 345 345 339 345 345 345 345 345 345 345 345 355			Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	34/			Ware! toosevelt Tra m, Maine 04	
	34 34 34 340 339	346 SETBACK		Lumber Warehouse 989 Roosevelt Trail Windham, Maine 04062	estprop In 83 Pine Ridge Rd Yarmouth, Maine
		346 SETBACK		Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	34/	346 SETBACK INFILTRATION BED, CRUSHED STOP THE SURFACE BEYOND THE DRIVEN		Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
		346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN	MAY	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
		346 SETBACK INFILTRATION BED, CRUSHED STOP THE SURFACE BEYOND THE DRIVEN	MAY DING EASEMENT TIC ONLY.	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
		GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE.	MAY DING EASEMENT TIC ONLY.	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	339 -342 344 349 -339 -333 -333 -333 -333 -333 -329 -329 -329 -327 -328 -327 -328 -327 -328	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER MDOT GRAD GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXILT THE SITE	MAY DING EASEMENT TIC ONLY.	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	34 - 342 $344 - 342$ $344 - 342$ $344 - 342$ $344 - 342$ $-342 - 34$	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER MDOT GRAD GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE. DO NOT ENTER SIGNS ON	MAY DING EASEMENT TIC ONLY.	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	339 -342 344 349 -339 -333 -333 -333 -333 -333 -329 -329 -329 -327 -328 -327 -328 -327 -328	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DIC ONLY. TIMES NEEDS	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
	339 -342 344 349 -339 -333 -333 -333 -333 -333 -329 -329 -329 -327 -328 -327 -328 -327 -328	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIC ONLY. TIMES NEEDS	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED.	34 - 342 $344 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 329 - 329 - 3334 - 33$	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
5	34 - 342 $344 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 329 - 329 - 3334 - 33$	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Ware! toosevelt Tra m, Maine 04	estprop In 83 Pine Ridge Rd Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 329 329 334 329	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Lumber Ware 989 Roosevelt Tre Windham, Maine 04	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	34 - 342 $344 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 339 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 328 - 329 - 329 - 329 - 3334 - 33$	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 329 329 334 329	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 329 329 334 329	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK DO NOT ENTER SIGNS ON BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	A SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE. DO NOT ENTER SIGNS ON BOTH SIDES OF GATE 332 FIRE HY 334 334 V	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description 1 10/1/18 Town Submitta 080 Boosevelt Te 080 Boosevelt Te 0.000 Boosevelt Te 0.000 Boosevelt Te 0.000 Boosevelt Te	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE. DO NOT ENTER SIGNS ON BOTH SIDES OF GATE 332 334 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description B80 Boosecreft 14 1 10/1/18 3080 Boosecreft 14	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL TO EXIT THE SITE. DO NOT ENTER SIGNS ON BOTH SIDES OF GATE 0' 33' 5' 33' 5' 33' 5' 5' 5' 5' 5' 5' 5' 5' 5' 5' 5' 5' 5' 5	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description B80 Boosecreft 14 1 10/1/18 3080 Boosecreft 14	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE. DO NOT ENTER SIGNS ON BOTH SIDES OF GATE 332 BOTH SIDES OF GATE 332 BOTH SIDES OF GATE 334 BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description Rev. Date Description 1 10/1/18 Town Submitta Sheet Title: Site Plan	Activity of the second
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	346 SETBACK INFILTRATION BED, CRUSHED STON THE SURFACE BEYOND THE DRIVEN 20' VEGETATIVE BUFFER GATE FOR TRUCK TRAFF TO BE CLOSED AT ALL T EXCEPT WHEN A TRUCK TO EXIT THE SITE. DO NOT ENTER SIGNS ON BOTH SIDES OF GATE 332 BOTH SIDES OF GATE 332 BOTH SIDES OF GATE 334 BOTH SIDES OF GATE	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description Rev. Date Description 1 10/1/18 Town Submitta B8 B000000000000000000000000000000000000	Vestprop In 83 Pine Ridge Rd North Yarmouth, Maine
EXISTING PIPE LINE ACCE TO BE REMOVED. ACCESS TO BE PROVIDE	342 344 342 344 339 $BW = 331$ $TW = 333$ 330 329 328 328 327 326 327 328 327 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 327 328 329 328 327 328 329 328 329 328 329 329 328 329 334 329 334 329 334 329 334 329 329 329 334 329 329 329 334 329 329 334 329 329 334 329 329 329 329 334 329	NF MEYER REALTY INVESTMENTS INC BK 29097 PG 723 LAND AREA: 0.74 ACRES	MAY DING EASEMENT DING EASEMENT TIMES NEEDS	Rev. Date Description Rev. Date Description 1 10/1/18 Town Submitted	Activity of the second

EROSION AND SEDIMENTATION CONTROL NOTES:
NTRODUCTION

NIRODUCTION

THE FOLLOWING PLAN FOR CONTROLLING SEDIMENTATION AND EROSION IN THIS PROJECT IS BASED ON CONSERVATION PRACTICES FOUND IN THE MAINE EROSION & SEDIMENT CONTROL BMP'S, MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION, MARCH 2016, OR LATEST EDITION. THE CONTRACTOR WHO IMPLEMENTS THIS PLAN SHALL BE FAMILIAR WITH THIS PUBLICATION AND ADHERE TO IT AND THE PRACTICES PRESENTED HEREIN.

REFERENCE IS MADE TO THE SITE PLAN (CI.O) WITHIN THE PLAN SET, SHOWING THE LOCATIONS AND TYPES OF PROPOSED MEASURES TO BE IMPLEMENTED.

GENERAL EROSION AND SEDIMENTATION CONTROL PRACTICES

THE FOLLOWING IS A LIST OF GENERAL EROSION CONTROL PRACTICES THAT WILL BE USED TO PREVENT EROSION AND SEDIMENTATION BEFORE, DURING AND AFTER THE CONSTRUCTION OF THIS PROJECT. IN ADDITION, SPECIAL CARE SHALL BE USED AT ALL TIMES TO:

- I) LIMIT DISTURBANCE AND, HENCE, EROSION
- 2) CORRECT ANY EROSION PROBLEMS IMMEDIATELY
- 3) REGULARLY MONITOR THE IMPLEMENTED PRACTICES, ESPECIALLY AFTER EVERY RAINFALL
- 4) REVEGETATE DISTURBED AREAS AS SOON AS POSSIBLE AFTER CONSTRUCTION 5) CONFORM TO ALL REQUIREMENTS/STANDARDS OF THE MASSACHUSETTS EROSION AND SEDIMENTATION CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS.

BILT FENCE AND/OR SILTSOXX SEDIMENT BARRIERS

SILT FENCE AND/OR SILTSOXX SEDIMENT BARRIERS WILL BE INSTALLED ALONG THE DOWNGRADIENT SIDE OF THE PROPOSED GROUND DISTURBANCE AREAS AND STOCKPILE AREAS PRIOR TO ANY CONSTRUCTION ACTIVITIES.

CATCH BASIN PROTECTION

CATCH BASIN PROTECTION WILL BE INSTALLED AT THE FIRST DOWNGRADIENT CATCH BASIN IN STREET ADJACENT TO ANY CONSTRUCTION ACTIVITIES.


CONSTRUCTION PHASE

THE FOLLOWING GENERAL PRACTICES WILL BE IMPLEMENTED TO PREVENT EROSION DURING CONSTRUCTION ON THIS PROJECT:

- I. ONLY THOSE AREAS UNDER ACTIVE CONSTRUCTION WILL BE CLEARED AND LEFT IN AN UNTREATED OR UNVEGETATED CONDITION. ONCE CONSTRUCTION OF AN AREA IS COMPLETE, FINAL GRADING, LOAMING AND SEEDING SHALL OCCUR IMMEDIATELY (REFER TO "POST CONSTRUCTION REVEGETATION" SECTION). IF DURING FINAL GRADING, LOAMING AND SEEDING CAN NOT OCCUR IMMEDIATELY, IT SHALL BE DONE PRIOR TO ANY STORM EVENT AND WITHIN 14 DAYS OF COMPLETING CONSTRUCTION IN THE AREA. IF FINAL GRADING. LOAMING AND SEEDING CANNOT OCCUR WITHIN 7 DAYS. OR IF THE AREA IS NOT UNDER ACTIVE CONSTRUCTION FOR A PERIOD LONGER THAN 7 DAYS, SEE ITEM NO. 4 BELOW.
- PRIOR TO THE START OF CONSTRUCTION IN A SPECIFIC AREA, SILT FENCING SHALL BE INSTALLED ON DOWNGRADIENT PORTIONS OF THE SITE AS LOCATED ON THE PLANS TO PROTECT AGAINST ANY CONSTRUCTION RELATED EROSION.
- 3. TOPSOIL WILL BE STOCKPILED WHEN NECESSARY IN AREAS WHICH HAVE MINIMUM POTENTIAL FOR EROSION AND WILL BE KEPT AS FAR AS POSSIBLE FROM EXISTING DRAINAGE AREAS AND WETLANDS. ALL STOCKPILES EXPECTED TO REMAIN LONGER THAN 7 DAYS SHALL BE :
- A. TREATED WITH ANCHORED MULCH (WITHIN 5 DAYS OF THE LAST DEPOSIT OF STOCKPILED SOIL).
- B. SEEDED WITH CONSERVATION MIX AND MULCHED IMMEDIATELY.

STOCKPILES SHALL BE EITHER PLACED UPHILL OF AN EXISTING SEDIMENT BARRIER ON THE SITE OR ENCIRCLED BY A HAY BALE OR SILT FENCE BARRIER THE FIRST DAY THAT STOCKPILING COMMENCES.

- 4. ALL DISTURBED AREAS EXPECTED TO REMAIN LONGER THAN 7 DAYS SHALL BE:
- A. TREATED WITH STRAW AT A RATE OF 70-90 LBS. PER 1000 SQUARE FEET FROM 4/16 TO 10/1, OR AT A RATE OF 150-200 LBS. PER 1000 SQUARE FEET FROM 10/1 TO 4/15.
- B. SEEDED WITH CONSERVATION MIX OF PERENNIAL RYE GRASS (1.0 LBS/1000 SQ.FT.) AND MULCHED IMMEDIATELY. FROM 10/1 TO 4/15, FOLLOW THE SEEDING RATES AS OUTLINED BELOW IN SECTION 5 OF THE "POST CONSTRUCTION REVEGETATION" SECTION.
- C. MONITORED EVERY TWO WEEKS UNTIL SEEDING CAN OCCUR AND REMULCHED AS NEEDED TO PROTECT SLOPES.
- 5. ALL GRADING WILL BE HELD TO A MAXIMUM 3:1 SLOPE WHERE PRACTICAL. GREATER SLOPES MAY BE USED WHERE THE BANKS ARE PROTECTED WITH SOFT ARMOUR MATTING, EROSION CONTROL MATTING, OR RIPRAP. ALL SLOPES WILL BE STABILIZED WITH PERMANENT SEEDING IMMEDIATELY AFTER FINAL GRADING IS COMPLETE. (IT IS UNDERSTOOD THAT IMMEDIATELY MEANS WITHIN 5 DAYS OF THE COMPLETION OF WORK. SEE POST-CONSTRUCTION REVEGETATION FOR SEEDING SPECIFICATION.)
- 6. CONSTRUCTION TRAFFIC WILL BE DIRECTED OVER THE EXISTING SITE ENTRANCE. THE ROAD SHALL BE SWEPT DAILY SHOULD SEDIMENT BE TRACKED ONTO IT.

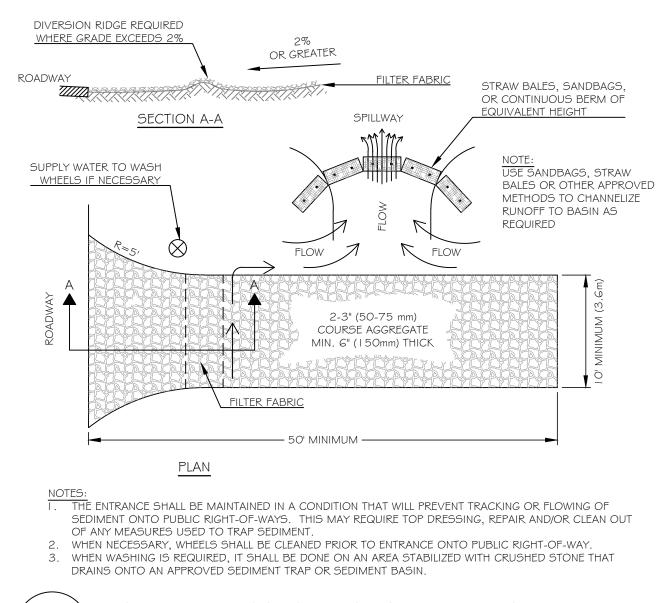

STABILIZED CONSTRUCTION ENTRANCE


DEWATERING

POST CONSTRUCTION REVEGETATION FINAL GRADING:

- APPEARANCE.

MONITORING SCHEDULE

THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING, MONITORING, MAINTAINING, REPAIRING, REPLACING AND REMOVING ALL OF THE EROSION AND SEDIMENTATION CONTROLS OR APPOINTING A QUALIFIED SUBCONTRACTOR TO DO SO.

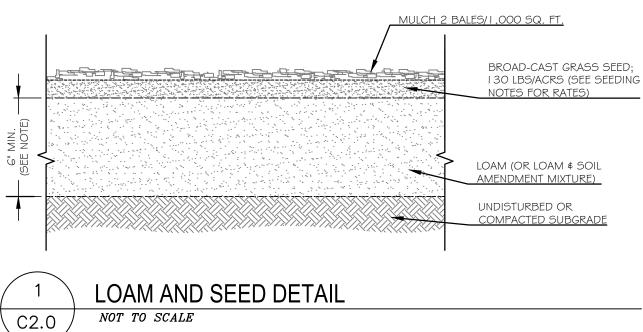

1010	
/	BACKFILL 6"X6" TRENCH
2-6"	I 1/4" SQ. HARDWOOD F SUPPORT NET INDUSTRIA POLYPROPYLENE I 2-MONTH UV RESISTAN GEOTEXTILE: MIRAFI ENV OR APPROVED EQUAL
	BACKFILL G"XG LOOSE FABRIC I. INSTALLATION MANUFACTUN 2. SILT FENCE S THROUGHOL
3 C2.0	NOT TO SCALE

FENCING STAPLED

TO POST

C2.0

NOT TO SCALE

ALL DEWATERING DISCHARGE LOCATIONS SHALL BE LOCATED ON RELATIVELY FLAT GROUND AT LEAST 100' FROM STREAMS AND WETLANDS. THE CONTRACTOR SHALL UTILIZE DIRTBAGS, EROSION CONTROL MIX BERMS, OR SIMILAR METHODS FOR FILTRATION OF DEWATERING. THE FLOW FROM DEWATERING PUMPS SHALL BE DISCHARGED TO A SEDIMENTATION BASIN.

THE FOLLOWING GENERAL PRACTICES WILL BE IMPLEMENTED TO PREVENT EROSION AS SOON AS AN AREA IS READY TO UNDERGO

I. A MINIMUM OF G" OF LOAM WILL BE SPREAD OVER DISTURBED AREAS AND GRADED TO A UNIFORM DEPTH AND NATURAL

2. LAWN AREAS: REFER TO SEED MIXTURES FOR PERMANENT COVER, DRY CONDITIONS MIX, NEW HAMPSHIRE EROSION AND SEDIMENTATION CONTROLS DURING CONSTRUCTION, OR APPROVED EQUAL.

3. MULCH SHALL BE HAY OR STRAW MULCHES THAT ARE DRY AND FREE FROM UNDESIRABLE SEEDS AND COURSE MATERIALS.

A. APPLICATION RATE MUST BE 2 BALES (70-90 LBS.) PER 1,000 SQUARE FEET OR 1.5 TO 2 TONS (90-100 BALES) PER ACRE TO COVER 75 TO 90% OF THE GROUND SURFACE. B. DRIVE OVER WITH TRACKED CONSTRUCTION EQUIPMENT ON GRADES OF 5% AND LESS.

C. BLANKET WITH TACKED PHOTODEGRADABLE/BIODEGRADABLE NETTING ON GRADES GREATER THAN 5%.

4. HYDRO-MULCH SHALL CONSIST OF A MIXTURE OF ASPHALT, WOOD FIBRE OR PAPER FIBRE AND WATER, WHICH IS SPRAYED OVER A SEEDED AREA. HYDRO-MULCH SHALL NOT BE USED BETWEEN 10/1 AND 4/15.

5. CONSTRUCTION SHALL BE PLANNED TO ELIMINATE THE NEED FOR SEEDING BETWEEN OCTOBER 1ST AND APRIL 15TH. SHOULD SEEDING BE NECESSARY BETWEEN THESE DATES, THE FOLLOWING PROCEDURE SHALL BE FOLLOWED:

A. ONLY UNFROZEN LOAM SHALL BE USED.

B. LOAMING, SEEDING AND MULCHING WILL NOT BE DONE OVER SNOW OR ICE COVER. IF SNOW EXISTS, IT MUST BE REMOVED PRIOR TO PLACEMENT OF SEED.

C. WHERE PERMANENT SEEDING IS NECESSARY, ANNUAL WINTER RYE (1.2 LBS/1000 S.F.) SHALL BE SOWN INSTEAD OF THE PREVIOUSLY NOTED SEEDING RATE.

D. WHERE TEMPORARY SEEDING IS REQUIRED, ANNUAL WINTER RYE (2.5 LBS/1000 S.F.) SHALL BE SOWN INSTEAD OF THE PREVIOUSLY NOTED SEEDING RATE.


E. FERTILIZING, SEEDING AND MULCHING SHALL BE DONE ON LOAM THE DAY THE LOAM IS SPREAD.

F. HAY MULCH SHALL BE SECURED WITH PHOTODEGRADABLE/BIODEGRADABLE NETTING. TRACKING BY MACHINERY ALONE WILL NOT SUFFICE. WINTER MULCHING RATES, AS SPECIFIED ABOVE IN SUBSECTION 5.A. OF THE "CONSTRUCTION PHASE" SECTION, SHOULD BE APPLIED DURING THIS PERIOD.

6. FOLLOWING FINAL SEEDING, THE SITE WILL BE INSPECTED EVERY 30 DAYS UNTIL 80% COVER HAS BEEN ESTABLISHED. RESEEDING WILL BE CARRIED OUT BY THE CONTRACTOR WITHIN 10 DAYS OF NOTIFICATION BY THE DESIGN PROFESSIONAL THAT THE EXISTING CATCH IS INADEQUATE.

MAINTENANCE MEASURES WILL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION CYCLE. IMMEDIATELY FOLLOWING ANY SIGNIFICANT RAINFALL (0.5" OR GREATER), AND AT LEAST ONCE A WEEK, A VISUAL INSPECTION WILL BE MADE OF ALL EROSION AND SEDIMENTATION CONTROLS AS FOLLOWS:

I. SILT FENCE SHALL BE INSPECTED AND REPAIRED. SEDIMENT TRAPPED BEHIND THESE BARRIERS SHALL BE EXCAVATED WHEN IT REACHES A DEPTH OF 6" AND REDISTRIBUTED TO AREAS UNDERGOING FINAL GRADING.

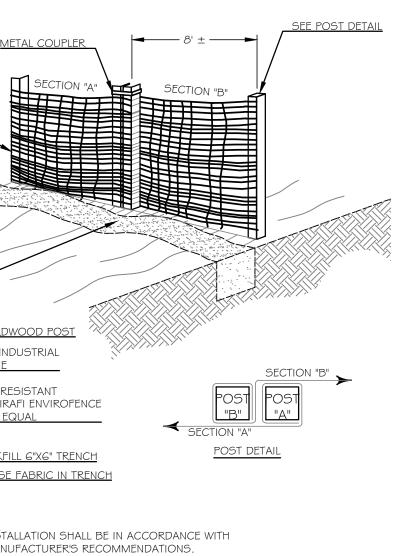

SHALL BE MAINTAINED CONTINUALL UT THE ENTIRE CONSTRUCTION CYCLE.

D SILT FENCE

LOAM & SEED ALL AREAS DISTURBED BY TOP BLOCK 28" WIDE <u>GRAVITY BLOCK</u> the start and the state and th I 2" MIN. GRAVEL BACKFILL, MDOT TYPE C. GRAVITY WALL, BY REDI-ROCK® INTERNATIONAL LLC, 41" WIDE GRAVITY BLOCK. STYLE: COBBLESTONE (WWW.REDI-ROCK.COM) 4"~ PERFORATED PVC SDR 35 W/ GROUND LEVEL SOC, CONNECT TO STORM DRAIN SYSTEM OR DAYLIGHT AS SHOWN CRUSHED STONE LEVELING PAD

MODULAR BLOCK WALL

NOT TO SCALE

C2.0

STANDARDS FOR STABILIZING SITES FOR THE WINTER

- CONSTRUCTION PERIOD
- ACTIONS TO STABILIZE THE SLOPE FOR LATE FALL AND WINTER.
- MONITOR GROWTH OF THE RYE OVER THE NEXT 30 DAYS.
- THE SLOPE FACE.
- 2. STANDARD FOR THE TIMELY STABILIZATION OF DISTURBED SOILS BY SEPTEMBER 15TH THE CONTRACTOR WILL SEED AND THE CONTRACTOR WILL TAKE ON OF THE FOLLOWING ACTIONS TO STABILIZE THE SOIL FOR LATE FALL AND WINTER.
- A. STABILIZE THE SOIL WITH TEMPORARY VEGETATION BY OCTOBER 1ST THE CONTRACTOR WILL SEED THE DISTURBED
- THE SOD TO PROMOTE ROOT GROWTH INTO THE DISTURBED SOIL.
- C. STABILIZE THE SOIL WITH MULCH BY NOVEMBER 15TH THE CONTRACTOR WILL MULCH THE DISTURBED SOIL BY SOIL

3. INSPECTIONS SHALL BE CONDUCTED AT LEAST ONCE EVERY MONTH UNDER FROZEN CONDITIONS.

EROSION CONTROL REMOVAL

AN AREA IS CONSIDERED STABLE IF IT IS PAVED OR IF 80% GROWTH OF PLANTED SEEDS IS ESTABLISHED. ONCE AN AREA IS CONSIDERED STABLE, THE EROSION CONTROL MEASURES CAN BE REMOVED AS FOLLOWS:

- I. SILT FENCE/BERM
- SHALL BE DISTRIBUTED TO AN AREA UNDERGOING FINAL GRADING OR REMOVED AND RELOCATED OFF-SITE.
- CATCH BASIN PROTECTION

CATCH BASIN INLET PROTECTION SHALL BE REMOVED FOLLOWING PERMANENT STABILIZATION OF UPGRADIENT AREAS. SEDIMENT SHALL BE REMOVED FROM THE SACK AND LEGALLY DISPOSED. SEDIMENT SHALL NOT BE WASHED INTO THE CATCH BASIN.

MISCELLANEOUS

ACCORDANCE WITH THE RATES PREVIOUSLY STATED.

THE ABOVE EROSION CONTROLS MUST BE REMOVED WITHIN 30 DAYS OF FINAL STABILIZATION OF THE SITE. CONFORMANCE WITH THIS PLAN AND FOLLOWING THESE PRACTICES WILL RESULT IN A PROJECT THAT COMPLIES WITH THE STATE REGULATIONS, AND WILL PROTECT WATER QUALITY IN AREAS DOWNSTREAM FROM THE PROJECT.

THE FOLLOWING STANDARDS AND METHODOLOGIES SHALL BE USED FOR STABILIZING THE SITE DURING THE WINTER

I. STANDARD FOR THE TIMELY STABILIZATION OF DISTURBED SLOPES (ANY AREA HAVING A GRADE GREATER THAN 25%) - THE CONTRACTOR WILL SEED AND MULCH ALL SLOPES TO BE VEGETATED BY SEPTEMBER 15TH. IF THE CONTRACTOR FAILS TO STABILIZE ANY SLOPE TO BE VEGETATED BY SEPTEMBER 15TH, THEN THE CONTRACTOR WILL TAKE ONE OF THE FOLLOWING

A. STABILIZE THE SOIL WITH TEMPORARY VEGETATION AND EROSION CONTROL MATS - BY OCTOBER IST THE CONTRACTOR WILL SEED THE DISTURBED SLOPE WITH WINTER RYE AT A RATE OF 3 POUNDS PER 1000 SQUARE FEET AND THEN INSTALL EROSION CONTROL MATS OR ANCHORED HAY MULCH OVER THE SEEDING. THE CONTRACTOR WILL

B. <u>STABILIZE THE SLOPE WITH WOOD-WASTE COMPOST</u> - THE CONTRACTOR WILL PLACE A SIX-INCH LAYER OF WOOD-WASTE COMPOST ON THE SLOPE BY NOVEMBER 15TH. THE CONTRACTOR WILL NOT USE WOOD-WASTE COMPOST TO STABILIZE SLOPES HAVING GRADES GREATER THAN 50% (2H:IV) OR HAVING GROUNDWATER SEEPS ON

C. STABILIZE THE SLOPE WITH STONE RIPRAP - THE CONTRACTOR WILL PLACE A LAYER OF STONE RIPRAP ON THE SLOPE BY NOVEMBER 15TH. THE DEVELOPMENT'S OWNER WILL HIRE A REGISTERED PROFESSIONAL ENGINEER TO DETERMINE THE STONE SIZE NEEDED FOR STABILITY ON THE SLOPE AND TO DESIGN A FILTER LAYER FOR UNDERNEATH THE RIPRAP.

MULCH ALL DISTURBED SOILS ON THE SITE. IF THE CONTRACTOR FAILS TO STABILIZE THESE SOILS BY THIS DATE, THEN

501 WITH WINTER RYE AT A SEEDING RATE OF 3 POUNDS PER 1000 SQUARE FEET, LIGHTLY MULCH THE SEEDED SOIL WITH HAY OR STRAW AT 75 POUNDS PER 1000 SQUARE FEET, AND ANCHOR THE MULCH WITH PLASTIC NETTING. THE CONTRACTOR WILL MONITOR GROWTH OF THE RYE OVER THE NEXT 30 DAYS. IF THE RYE FAILS TO GROW AT LEAST THREE INCHES OR FAILS TO COVER AT LEAST 75% OF THE DISTURBED SOIL BEFORE NOVEMBER, I, THEN THE CONTRACTOR WILL MULCH THE AREA FOR OVER-WINTER PROTECTION AS DESCRIBED IN ITEM III OF THIS STANDARD.


B. STABILIZE THE SOIL WITH SOD - THE CONTRACTOR WILL STABILIZE THE DISTURBED SOIL WITH PROPERLY INSTALLED SOD BY OCTOBER IST. PROPER INSTALLATION INCLUDES THE CONTRACTOR PINNING THE SOD ONTO THE SOIL WITH WIRE PINS, ROLLING THE SOD TO GUARANTEE CONTACT BETWEEN THE SOD AND UNDERLYING SOIL, AND WATERING


OPREADING HAY OR STRAW AT A RATE OF AT LEAST 150 POUNDS PER 1000 SQUARE FEET ON THE AREA SO THAT NO SOIL IS VISIBLE THROUGH THE MULCH. IMMEDIATELY AFTER APPLYING THE MULCH, THE CONTRACTOR WILL ANCHOR THE MULCH WITH NETTING OR OTHER METHOD TO PREVENT WIND FROM MOVING THE MULCH OFF THE DISTURBED


SILT FENCE SHALL BE DISPOSED OF LEGALLY AND PROPERLY OFF-SITE. ALL SEDIMENT TRAPPED BEHIND THESE CONTROLS


ONCE ALL THE TRAPPED SEDIMENTS HAVE BEEN REMOVED FROM THE TEMPORARY SEDIMENTATION DEVICES THE DISTURBED AREAS MUST BE REGRADED IN AN AESTHETIC MANNER TO CONFORM TO THE SURROUNDING TOPOGRAPHY. ONCE GRADED THESE DISTURBED AREAS MUST BE LOAMED (IF NECESSARY), FERTILIZED, SEEDED AND MULCHED IN


WALSH ENGINEERING ASSOCIATES, INC. One Karen Dr., Suite 2A Westbrook, Maine 04092 ph: 207.553.9898 www.walsh-eng.com Copyright © 2018				
THOMAS S. GREER No. 4206 CENSES ONAL ENGLA				
Description Description 989 Roosevelt Trail 989 Roosevelt Trail 989 Roosevelt Trail Mindham, Maine 04062 Mindham, Maine 04097 83 Prine Ridge Rd North Yarmouth, Maine 04097 83 Prine Ridge Rd				
Rev. Date Description Drawn Check 1 10/1/18 Town Submittal JWG TSG Sheet Title: Erosion Control Notes & Details				
Job No.: 419 Date: 9/10/18 Scale: 1"=20' Drawn: NGC/JWG Checked: TSG				

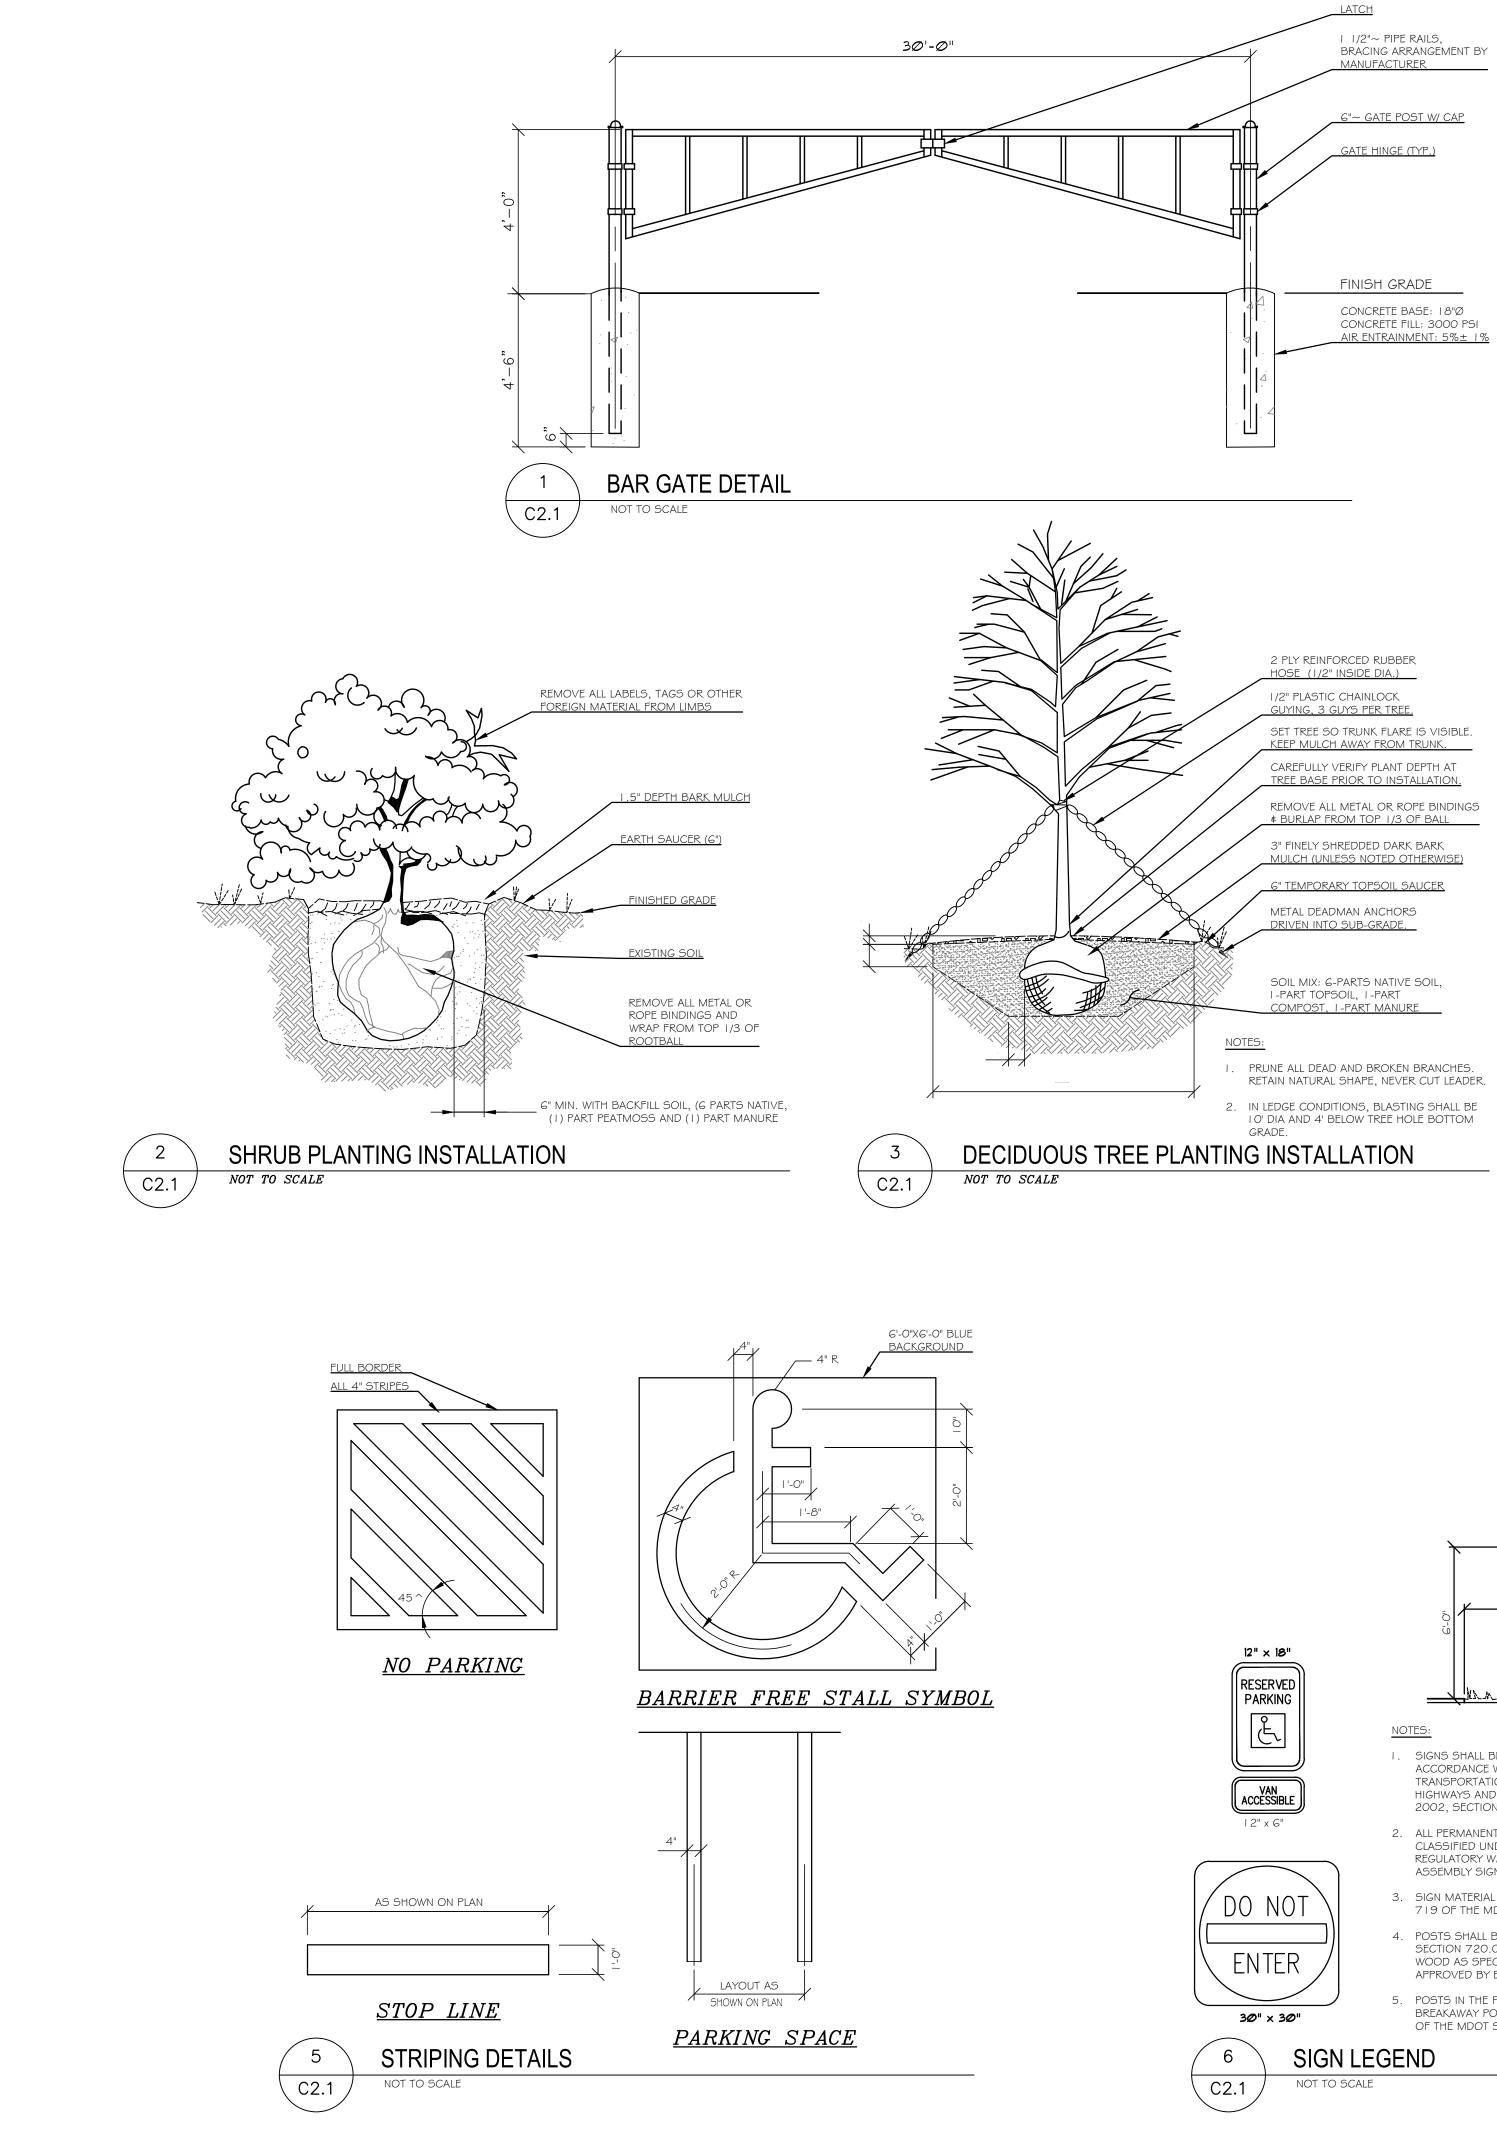

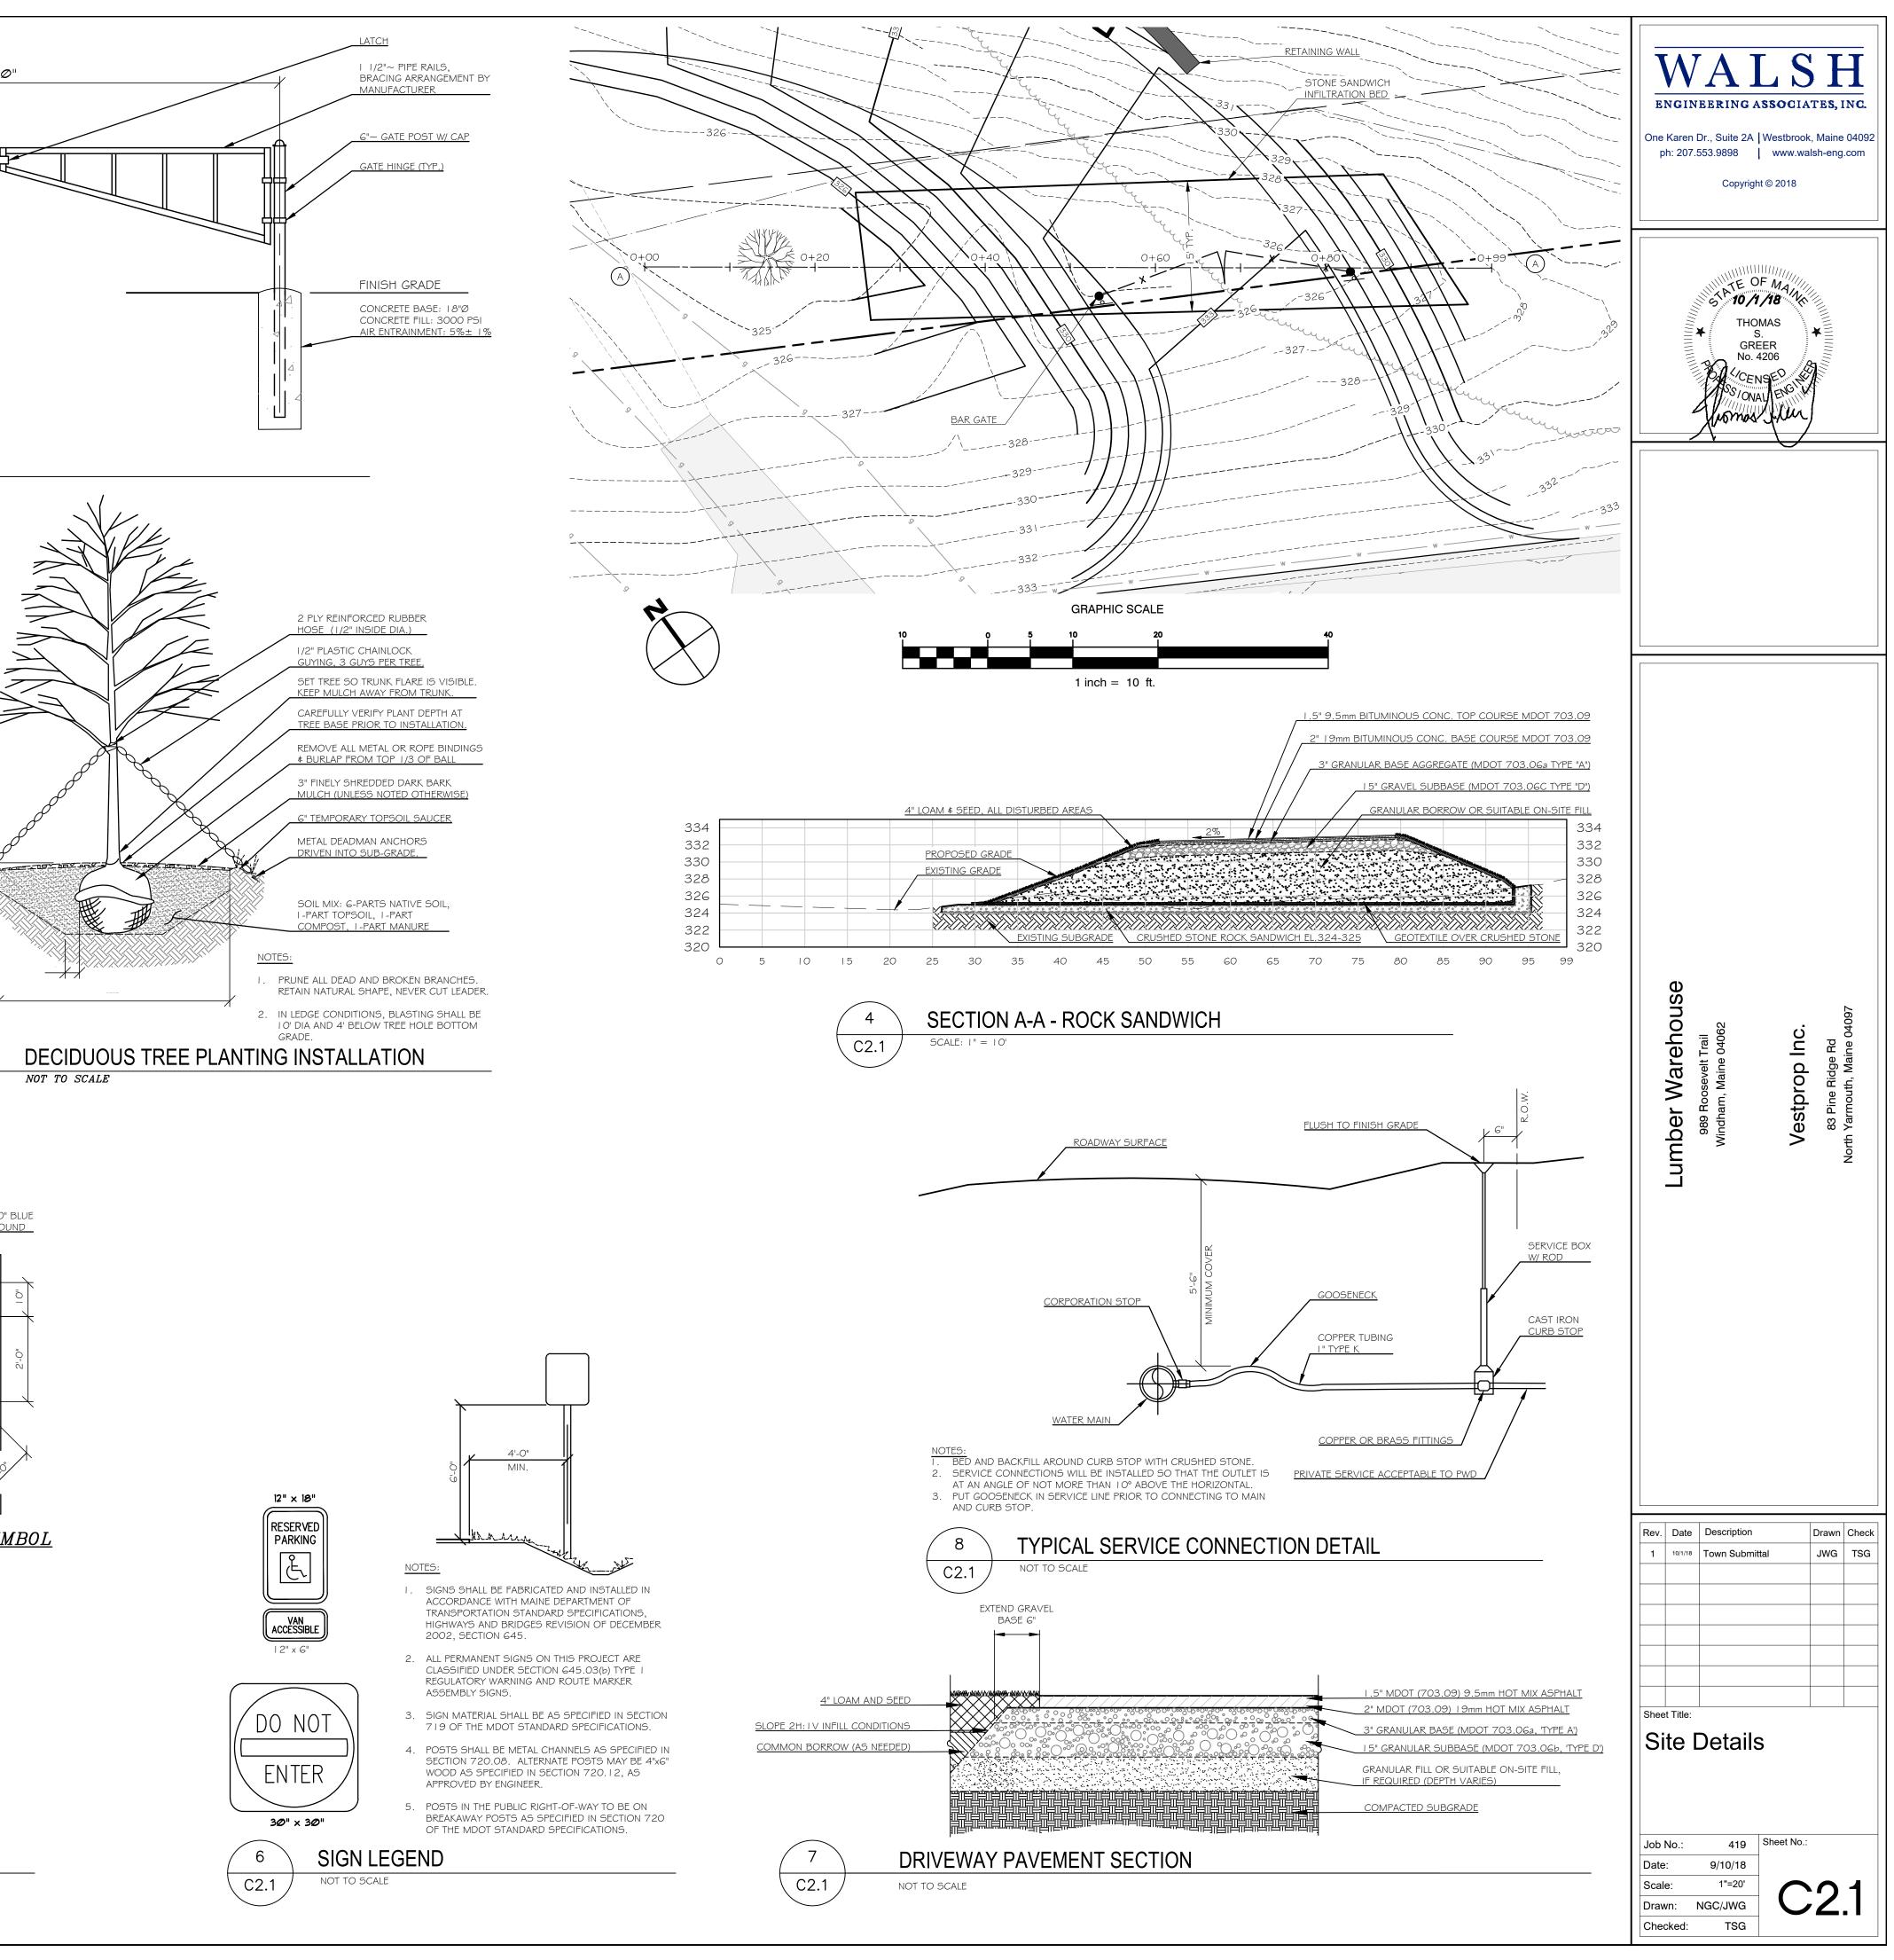

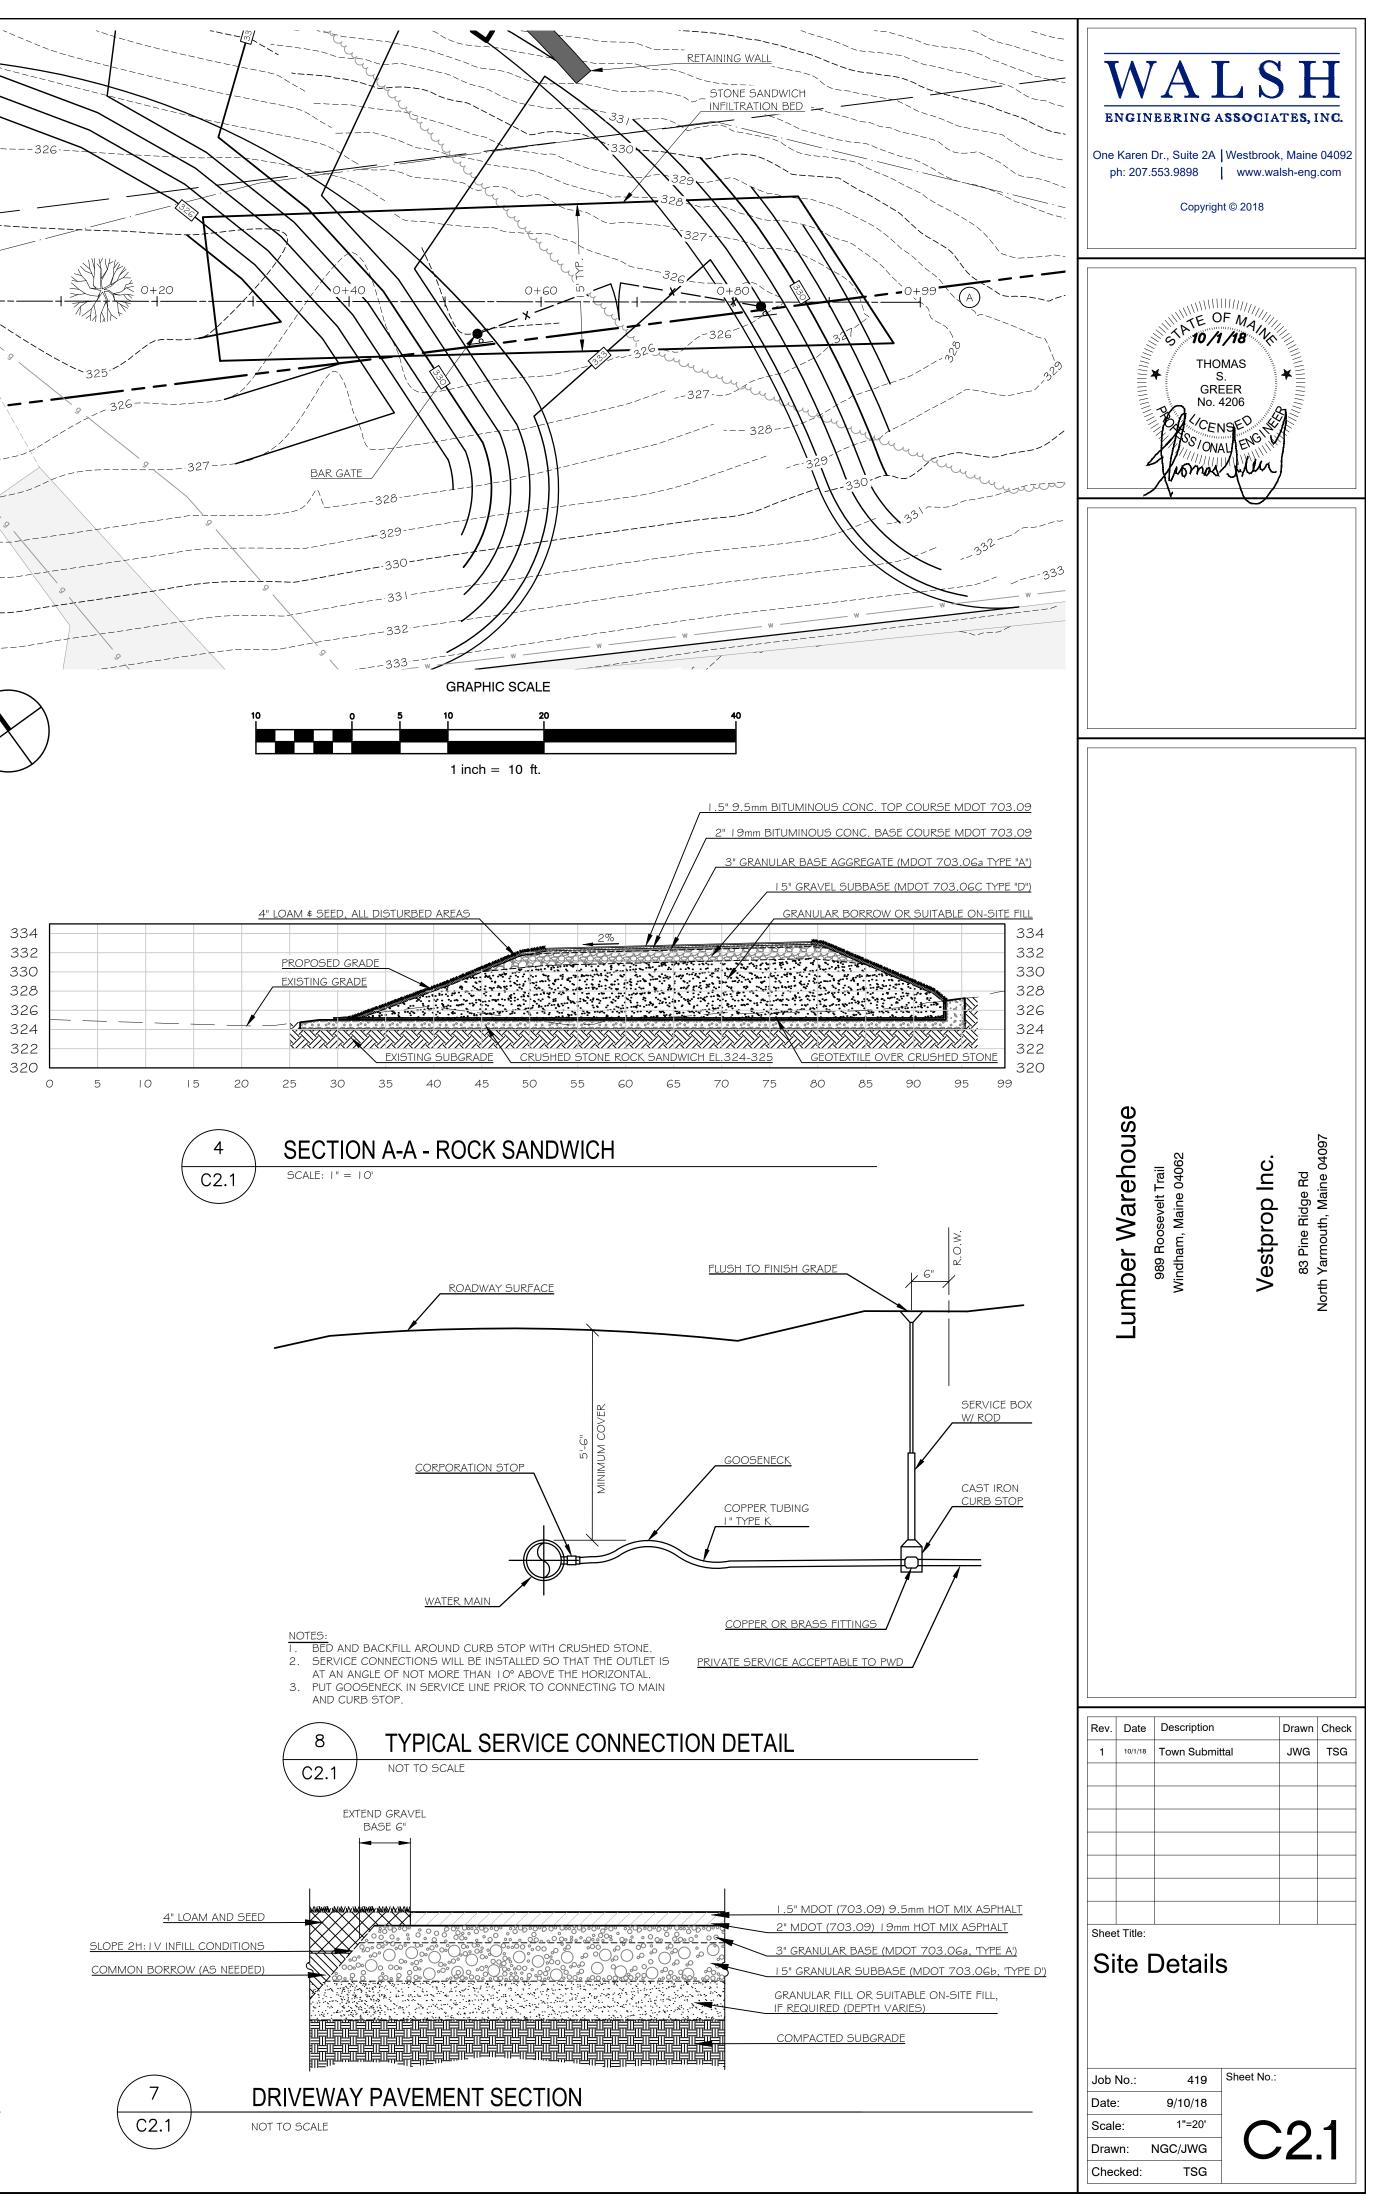

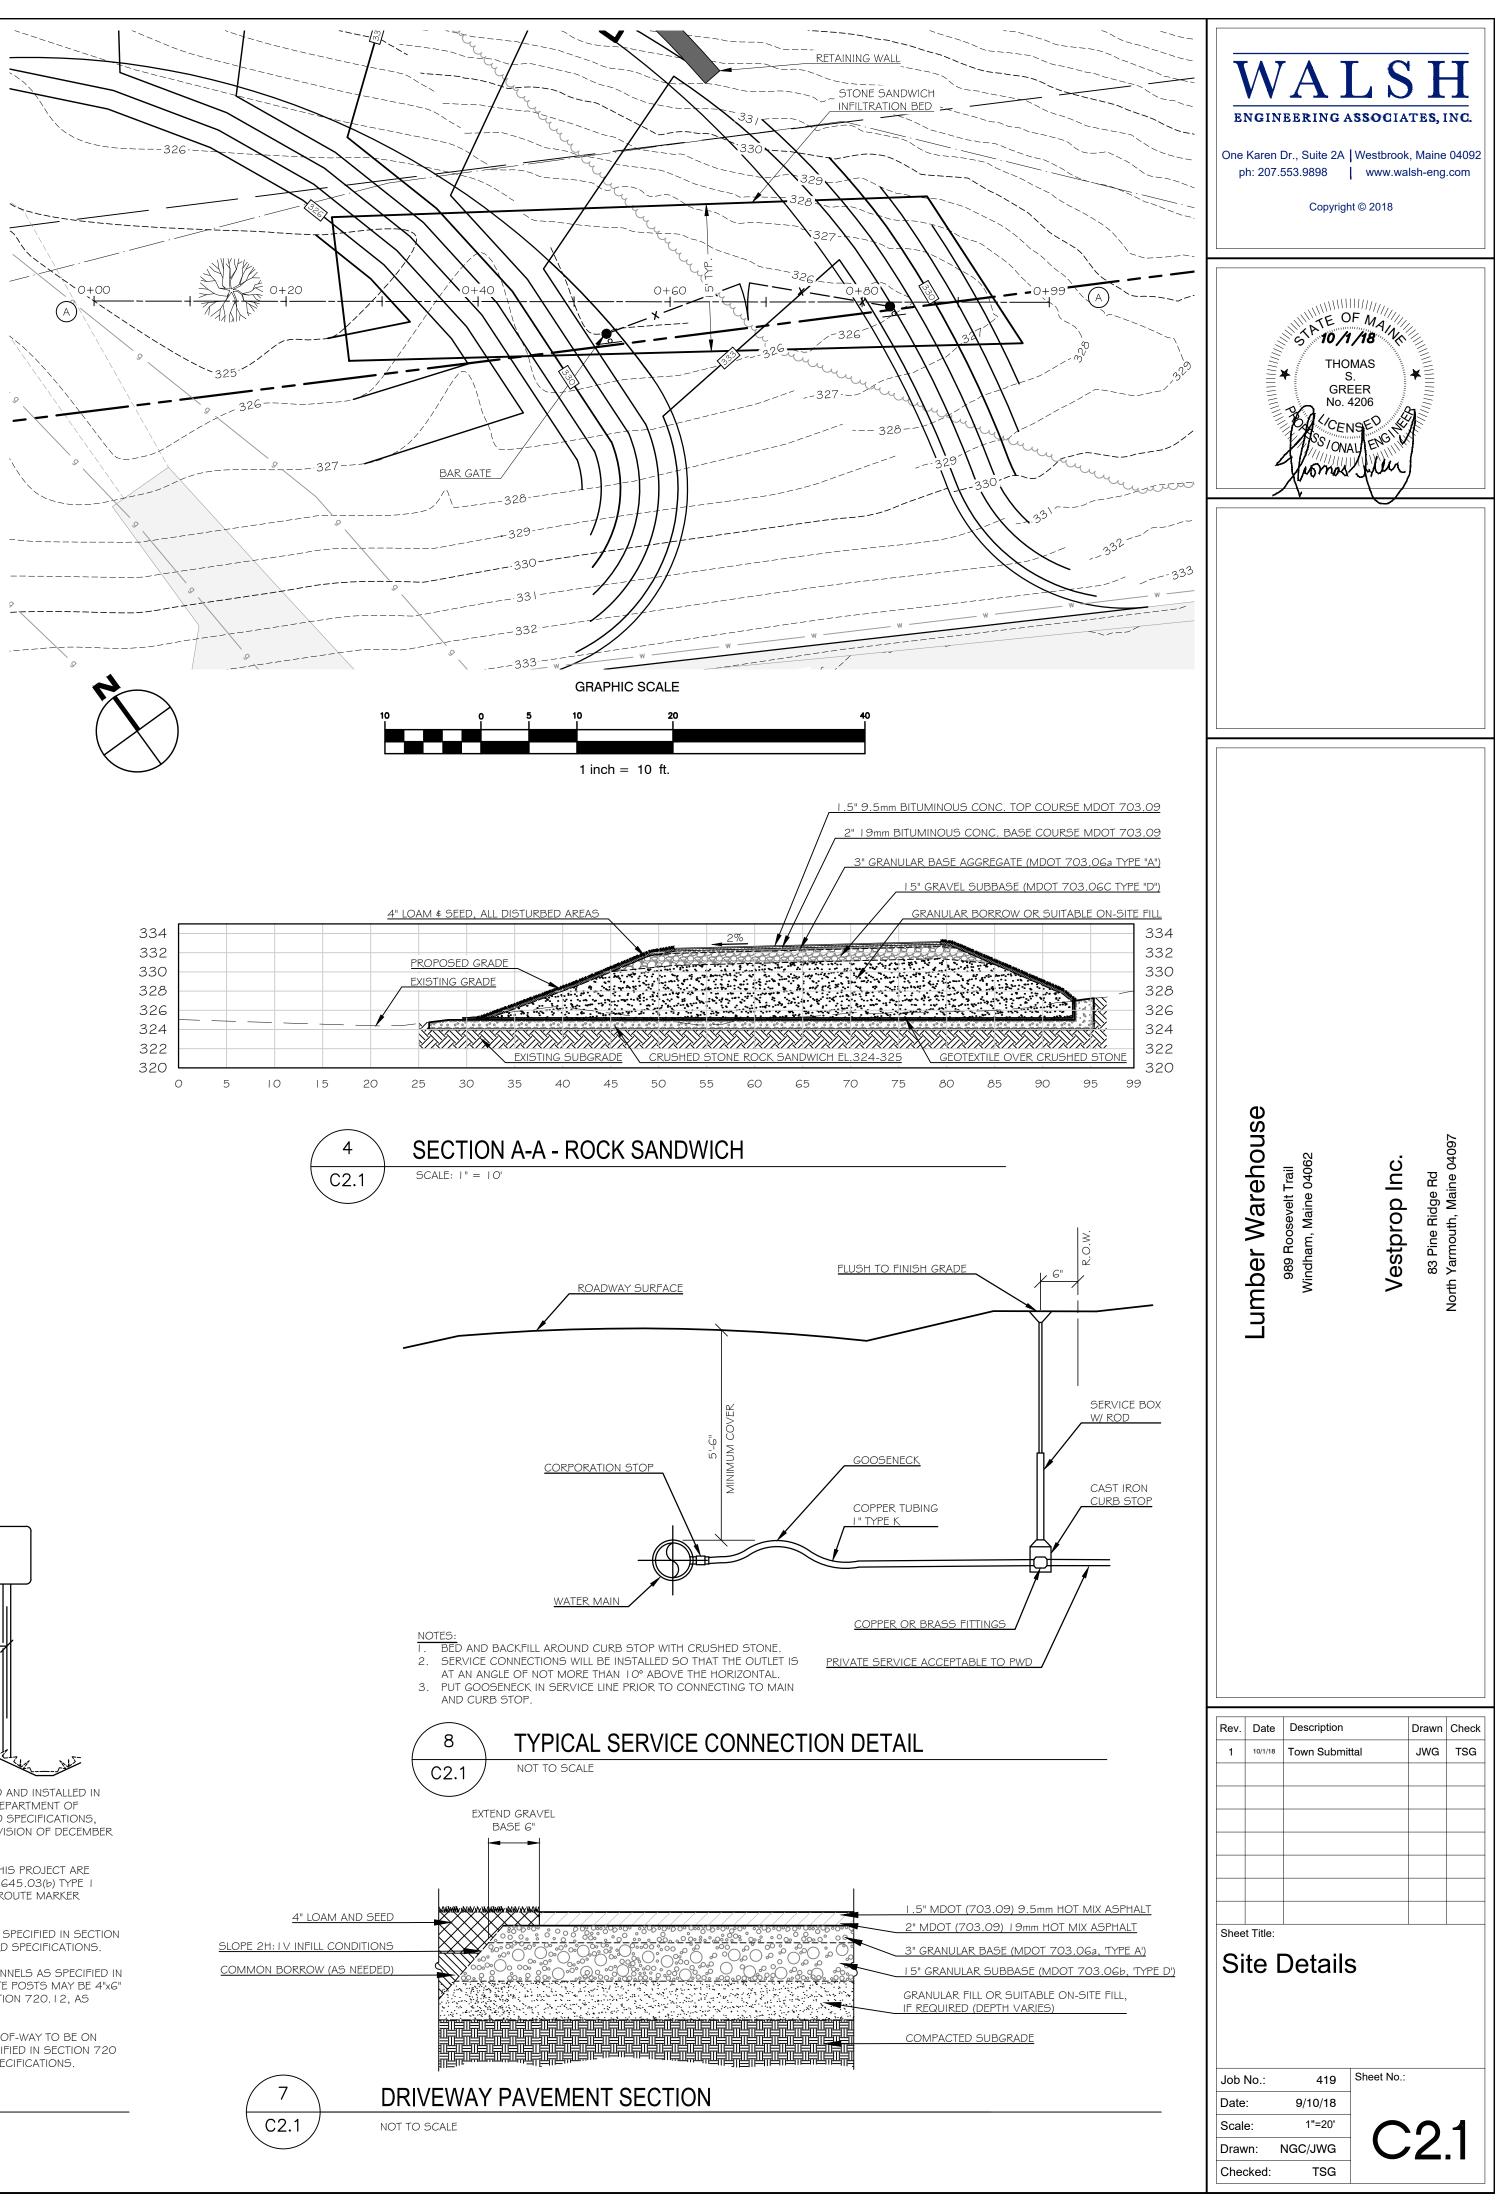

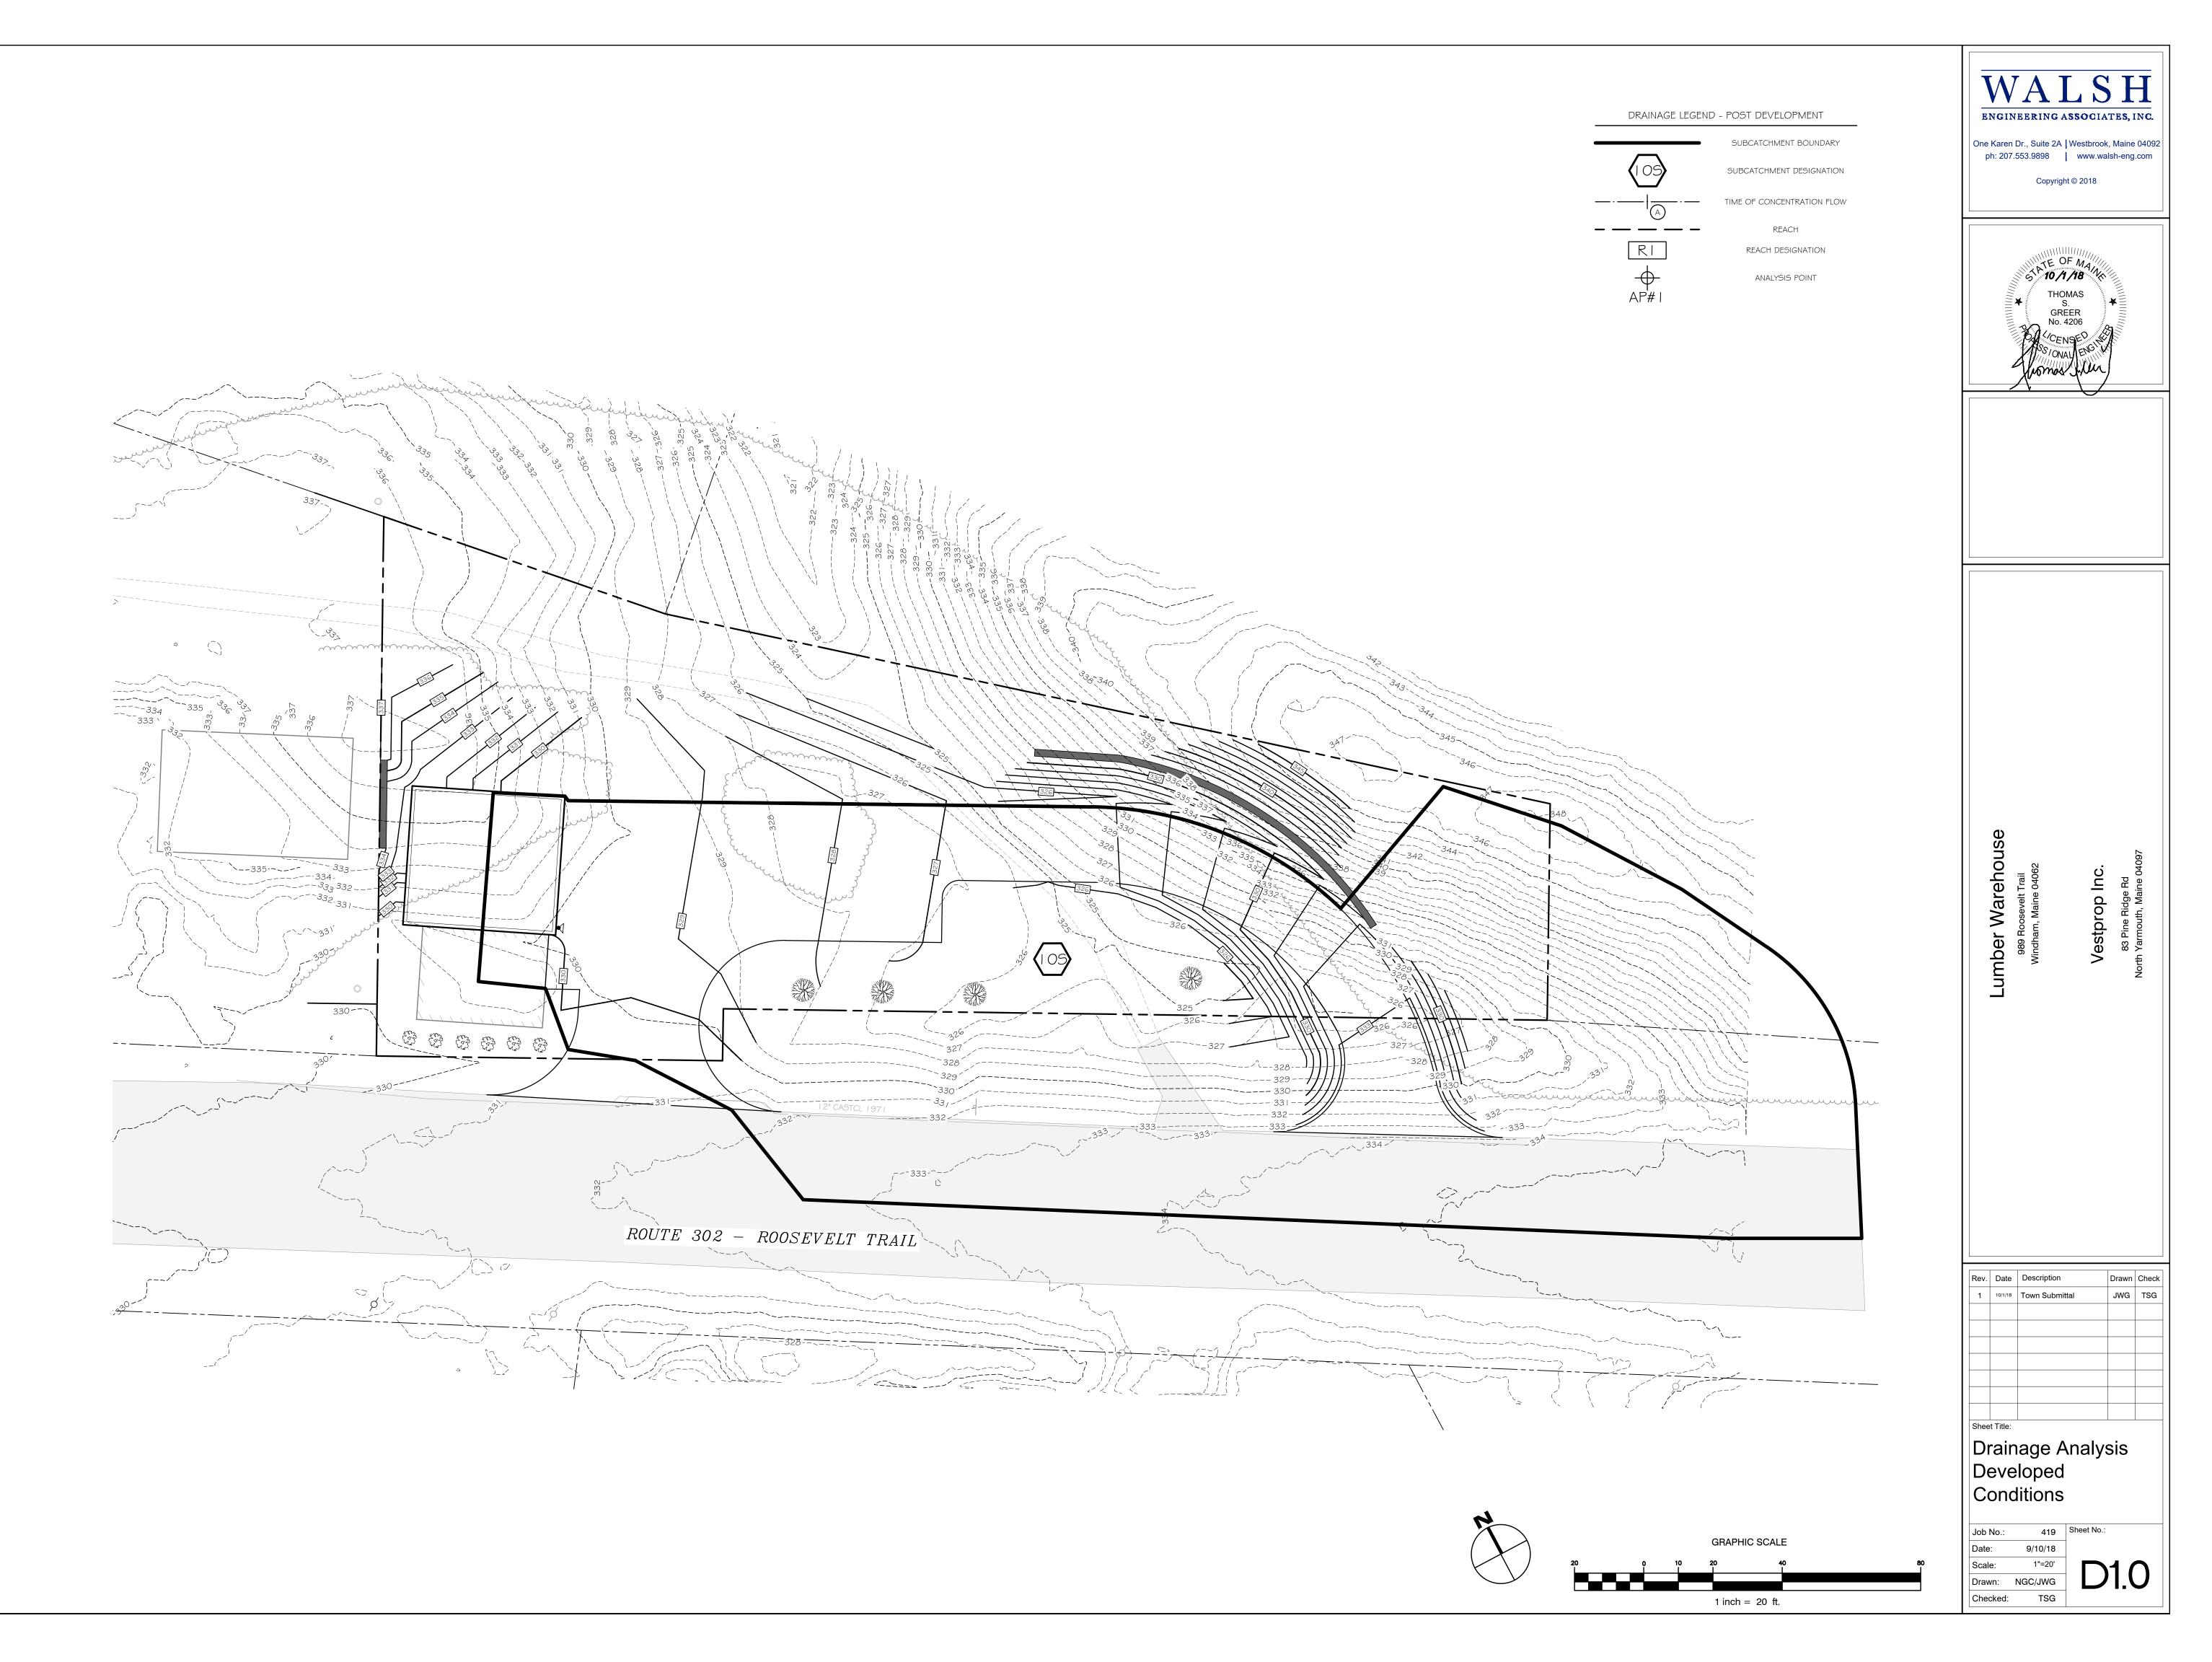

Lumber Warehouse - Windham\3. CAD\419 - Base.dwg plot date: 10/1/2018 1:44